

ENGLISH WIRING DIAGRAM

ACEPG101555BEPC
EMERGENCY LED DRIVER
• Input Voltage: 120-277 V, 50/60 Hz
• Input Current (max): 300 mA
• Input Power: 8 W
• Output Voltage: 15-55 Vdc
• Output Current: 180 mA - 670 mA
• Output Power: 30 W
• Battery Voltage: 7.2 V
• Battery Charge Current: 185 mA

• Battery Charge Time (max): 24 hrs
• Operating Duration (min): 90 min
• Ambient Temperature: 0-55 °C
• Output Class 2 Compliant
• Suitable for damp locations
• For factory or field installation
• For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only.
Do not energize before opening sealed unit. BATTERY not replaceable.
Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

POWER

PRINTED IN CHINA

TAA

CE

UL


CCC

OC

ACE LEDS

800-375-6355

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

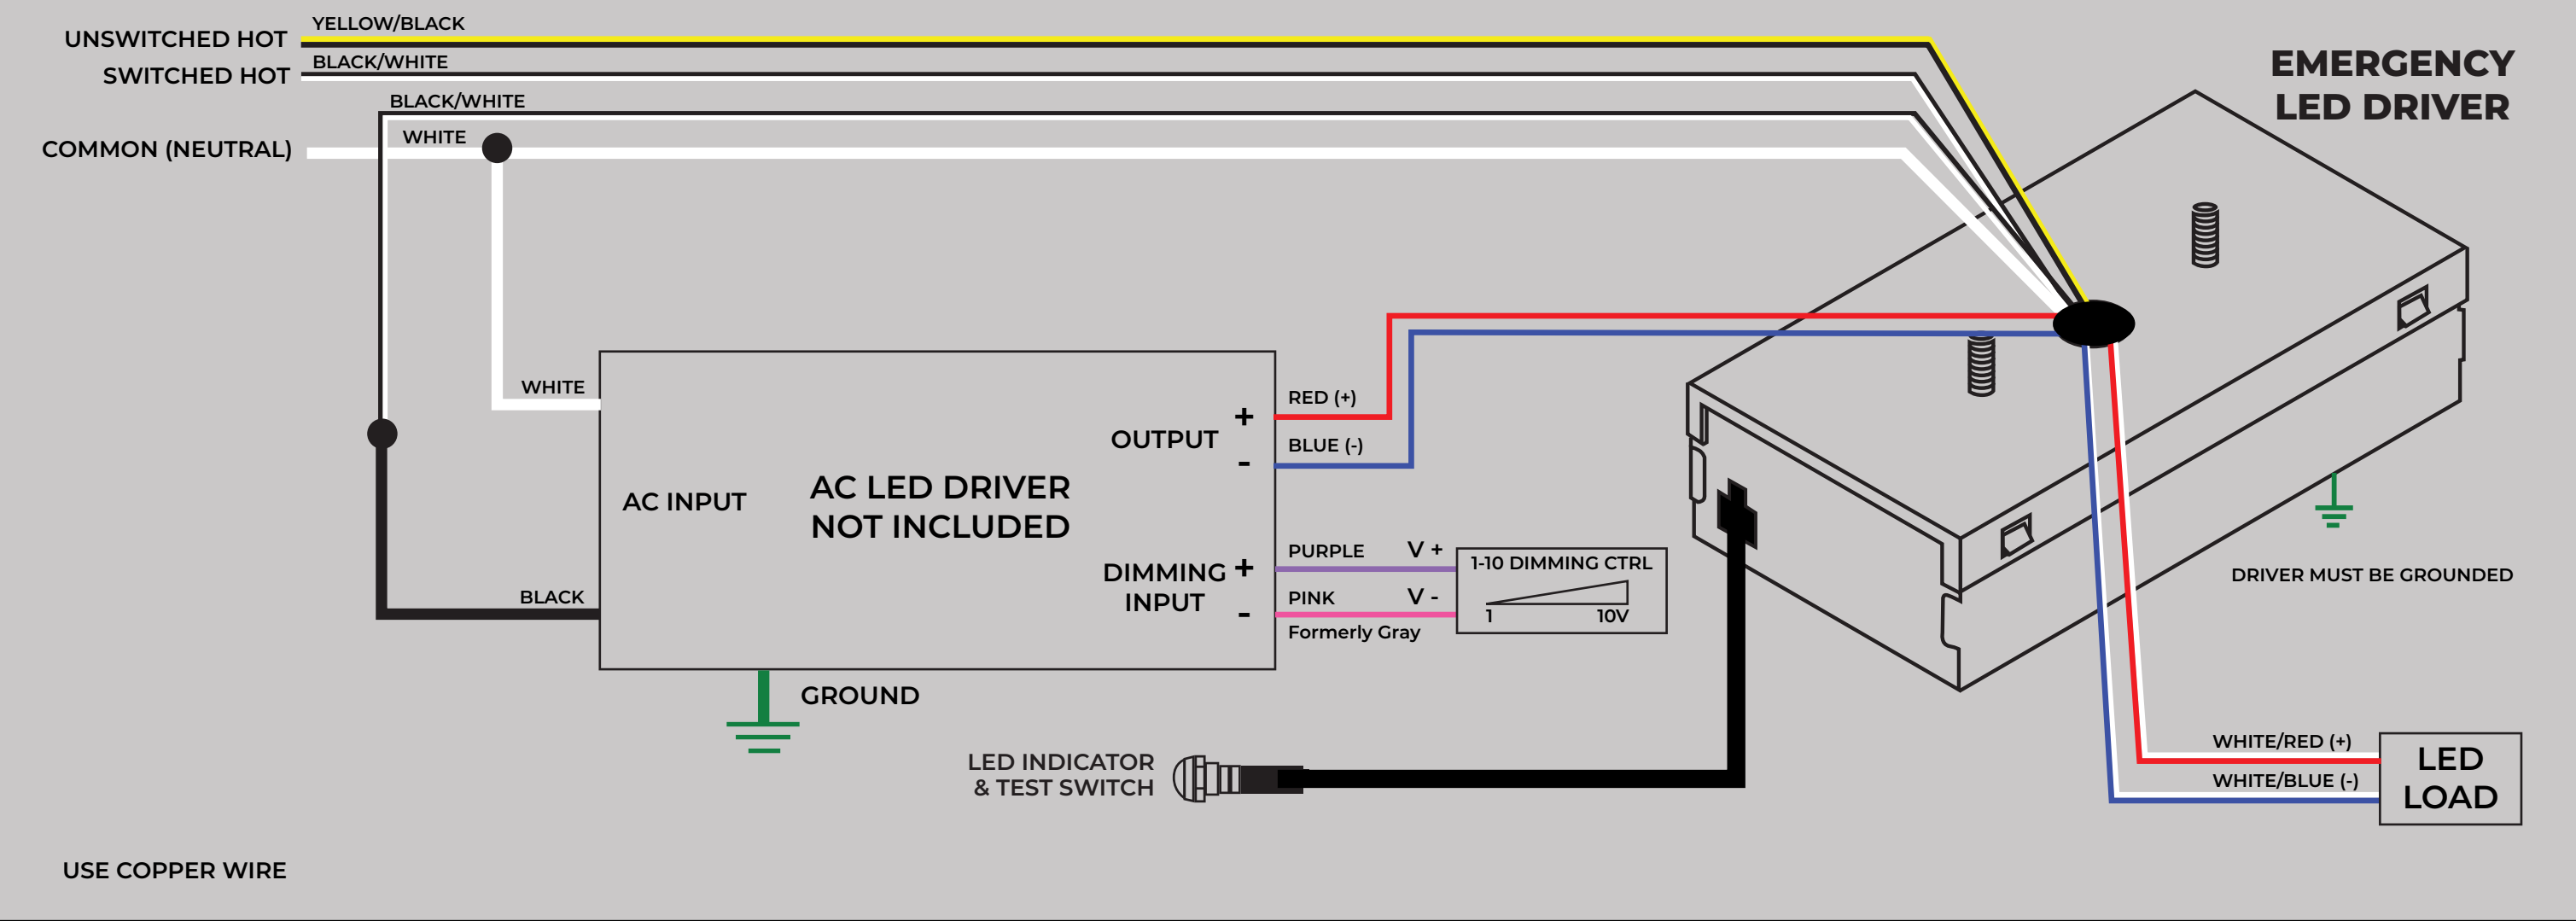

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

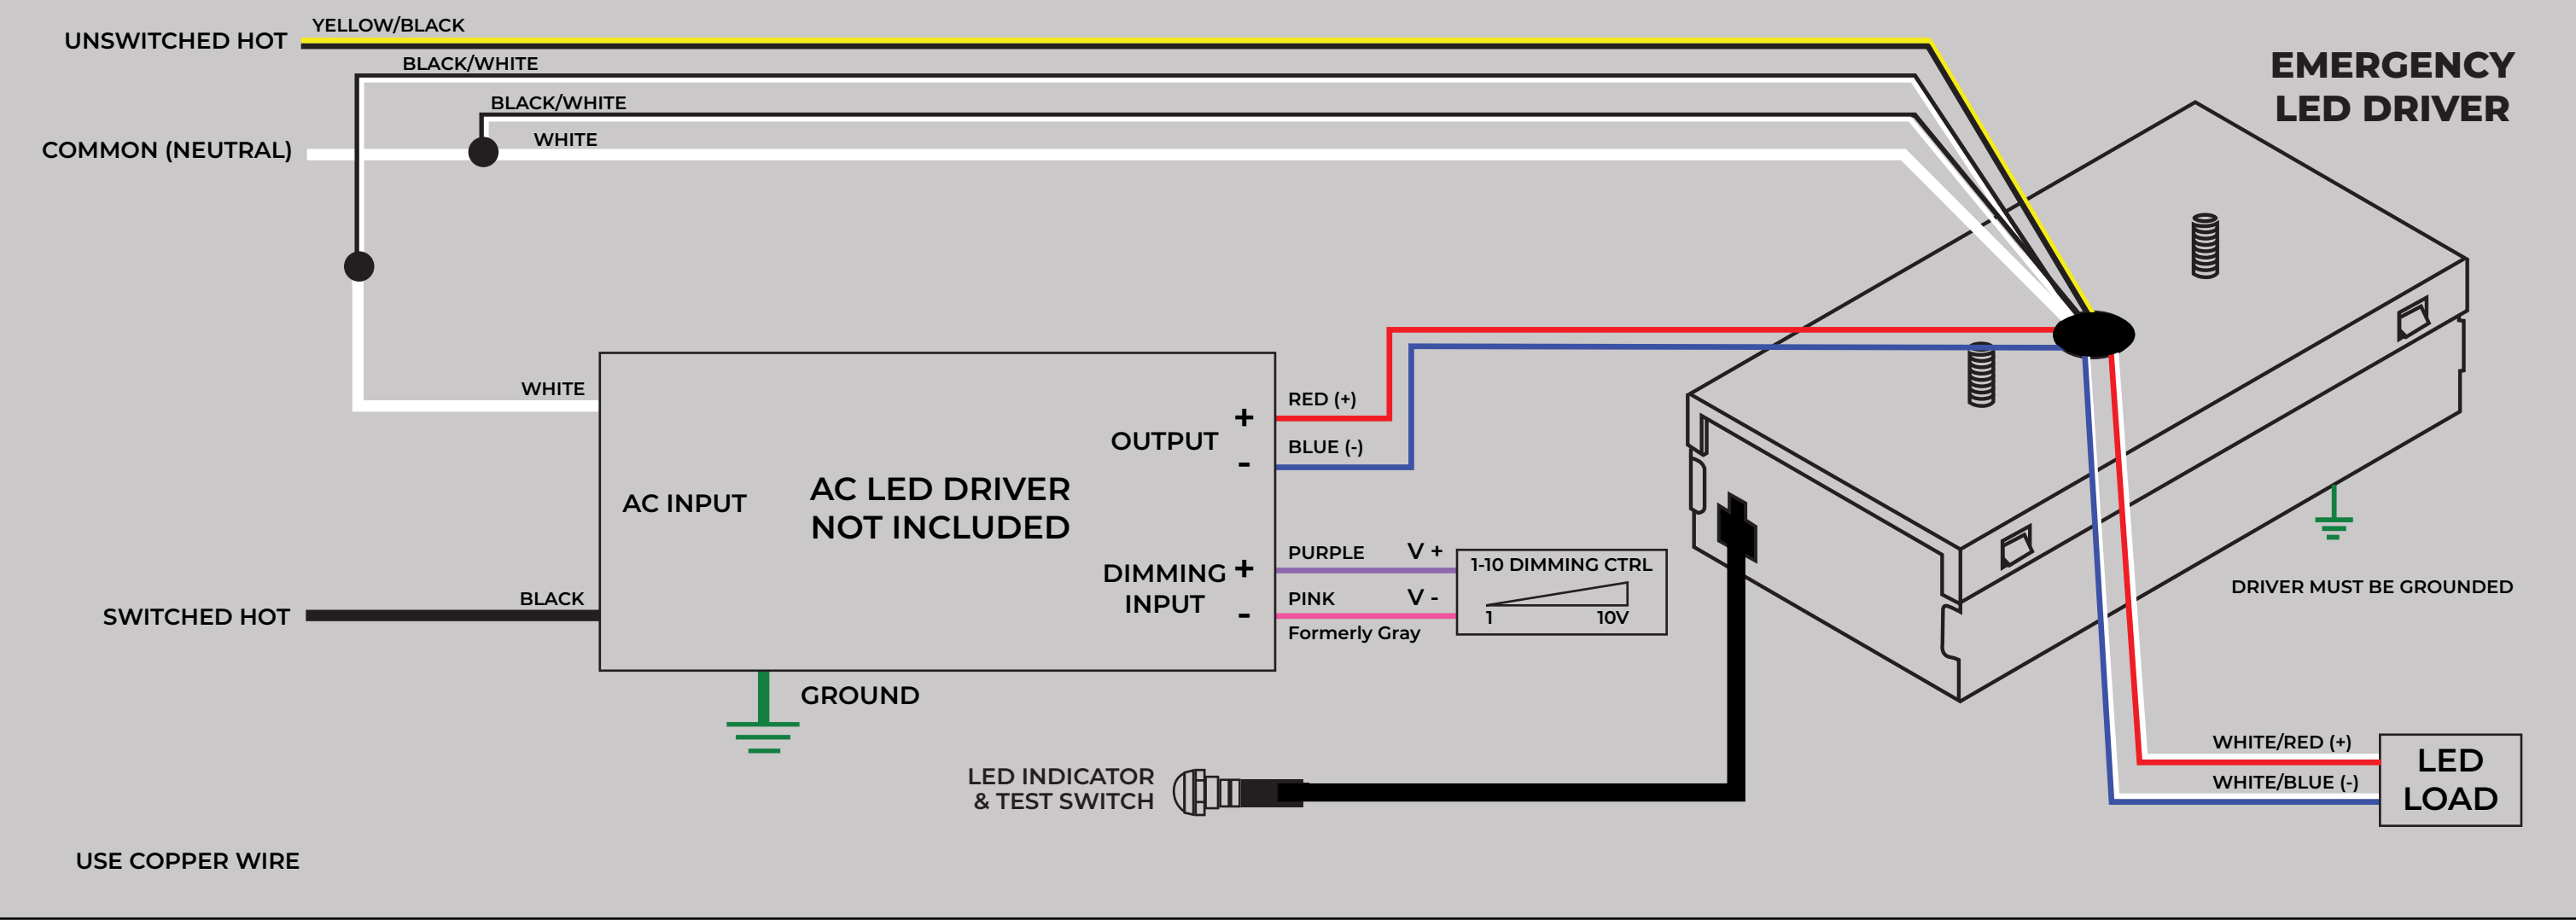


DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPG101555BEPC
EMERGENCY LED DRIVER

- Input Voltage: 120-277 V 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 15-55 Vdc
- Output Current: 365 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 7.2 V
- Battery Charge Current: 185 mA

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE


CEC LISTED
ETL
UL
TAA
FCC
RoHS
REACH

800-375-6355

CEC
ETL
UL
TAA
FCC
RoHS
REACH

800-375-6355

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

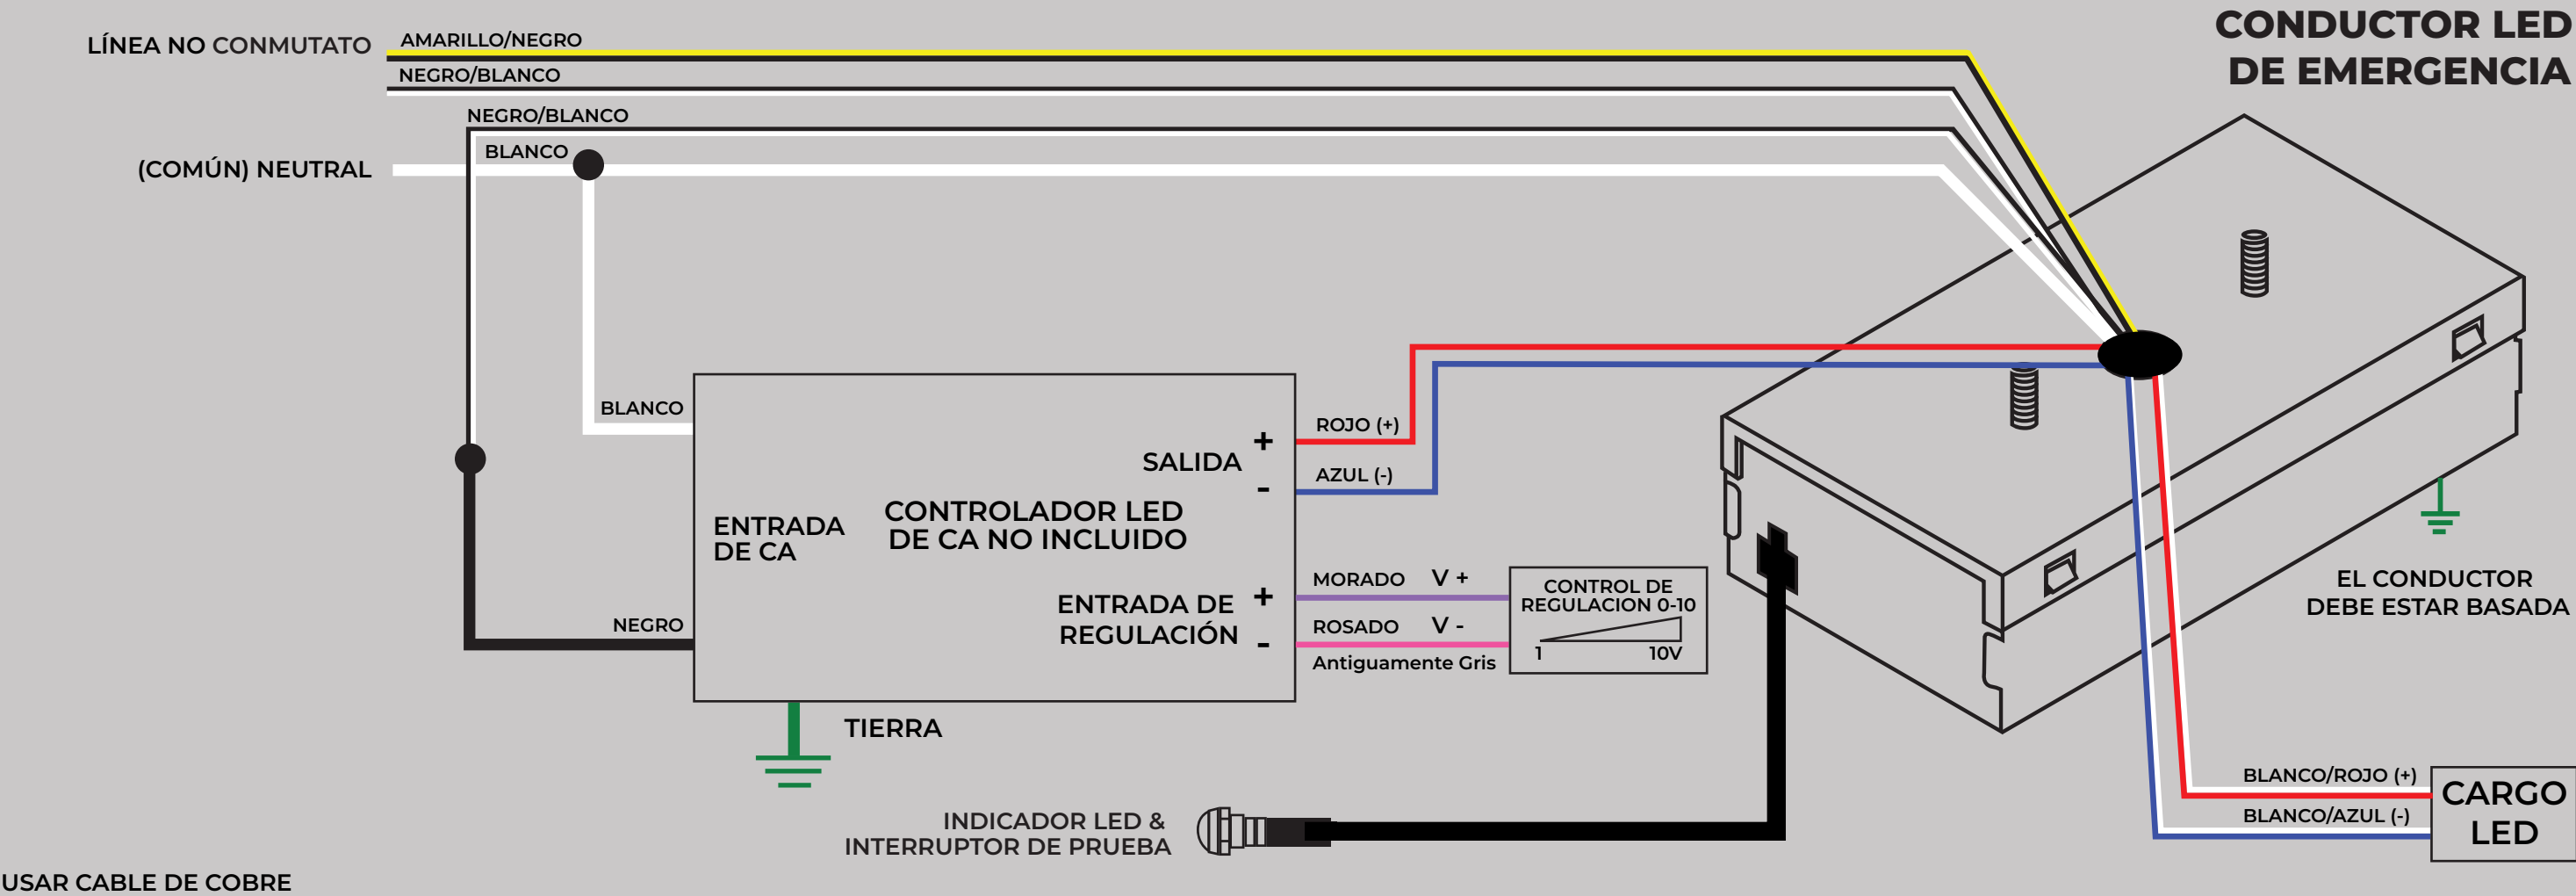

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

