



**PROGRAMMABLE,
DIGITAL, WIDE-RANGE
AJUSTABLE CURRENT & DIMMING
CLASS P LISTED**

Constant Current LED Driver

**Model Number
AC-60CDI.4APTPU**

Input Voltage: 120 - 277V
Input Frequency: 50/60Hz
Side Mount/Leads
< 1 Sec. Start time


ELECTRICAL SPECIFICATIONS:

Dim-to-1% (Default)

Output Power Max	Input Power	Input Current	Min PF (full load)	Max THD (full load)	Output Voltage	Output Current	T case Max	Min. Starting Temp	IP Rating	Efficiency Up To	Dimming Protocol	Dimming Range
60W	70W	0.6@120V 0.26@277V	>90	<20	27-55V	700mA to 1400mA	90°C	-40°C	64	86%	0 to 10V	1 to 100%


**This driver can operate down to -40 °C in a non-dimming condition. Below 0 °C some flicker may be observed.

WIRING:

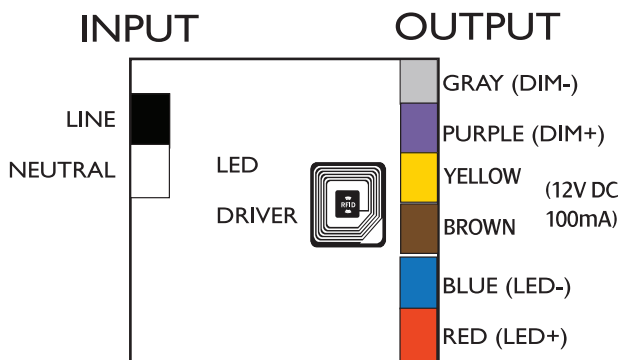

Lead Lengths							
Black	5.9"	Blue	5.9"	Purple	5.9"	Yellow	5.9"
White	5.9"	Red	5.9"	Gray	5.9"	Brown	5.9"

PHYSICAL:



Length	Width	Height	Mounting
12.8"	1.34"	1.06"	12.5"

Tref Max Value (°C)	Tc/Tref Value (°C)	Ta Value (°C)
53	90	50

SAFETY:

- Class P Listed
- UL and cUL Recognized
- UL Outdoor Type I
- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (3 KV)
- Dim-To-Off Programming Option
 - o Active: Code = E2 04 01 04
 - o Inactive: Code = E2 04 00 04

INSTALLATION:

- Max Remote installation distance is 18 ft
- LED driver cases should be grounded
- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/I05C tinned stranded copper lead-wires are required for installation



*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.



Phone Instructions


First you must have a Android device (phone/tablet) with NFC-V app downloaded.
 Open App; then place the device on top of the driver matching up sensors until it syncs up
 Basic format
 Write
 Insert the appropriate code from chart above
 Write
 Successfully written will appear



To Check: Read
 Read
 Shows you the Block - 00 00 00 00
 This is where the code you input appears

IOUT/VOUT CURVE

Use with NFC-V Reader App Available Free at Google App Store

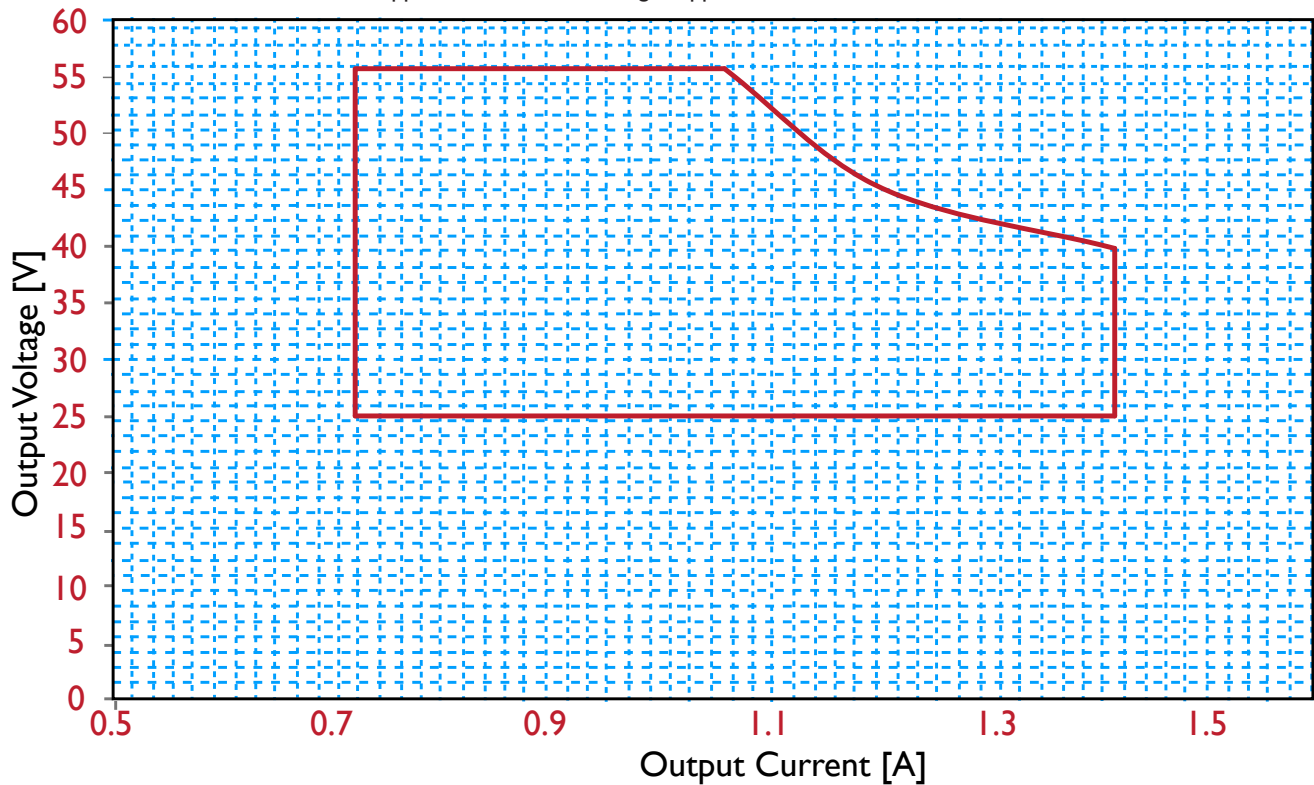


CONTROL THE IOUT WITH THE PROGRAMMING WAND. DOWNLOAD SOFTWARE FROM <http://www.aceleds.com/programmable.php>

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Performance Characteristics


Life Time v.s. Case Temperature Curve

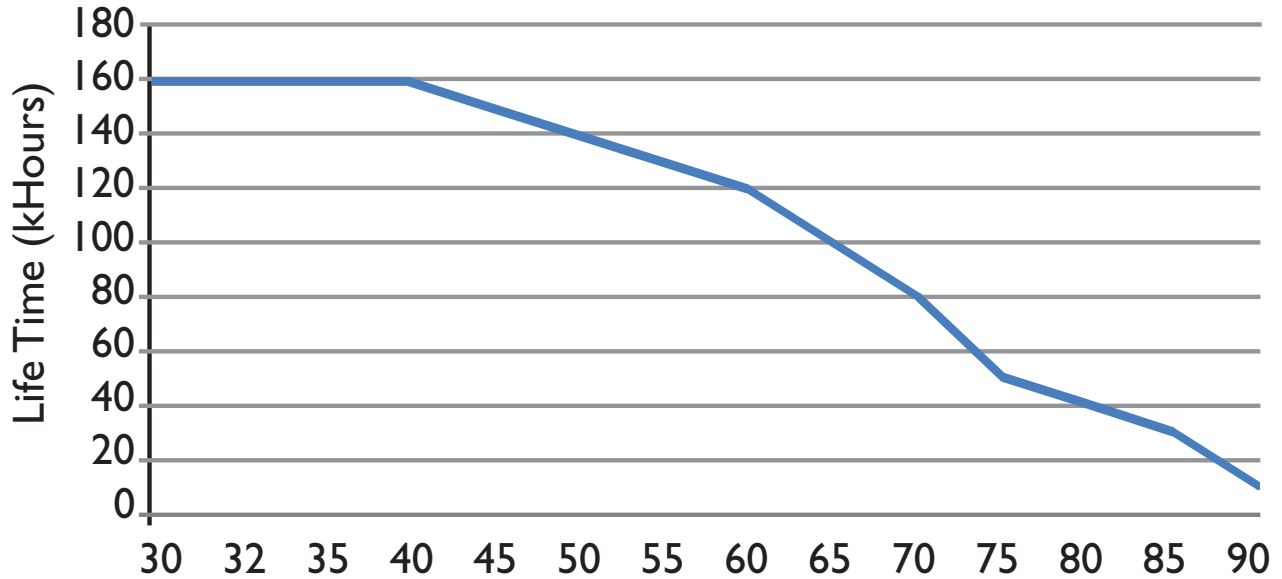

Case Temperature Curve (°C)

Derating Curve

120Vac & 277Vac

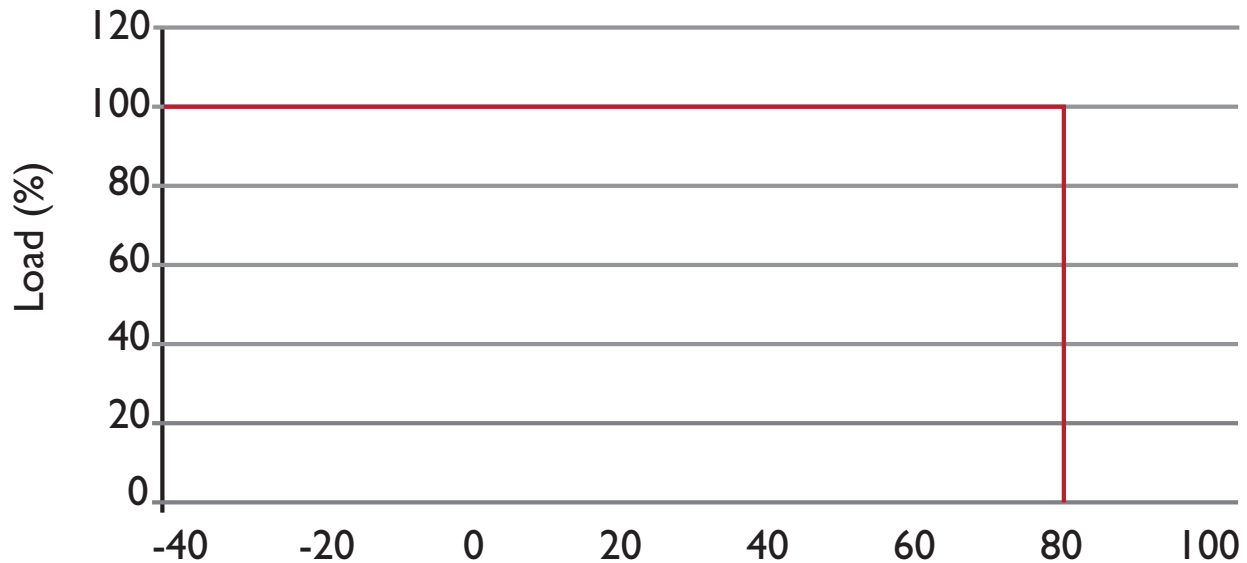


Outside Driver Ambient Temperature (°C)


3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Efficiency v.s. Load

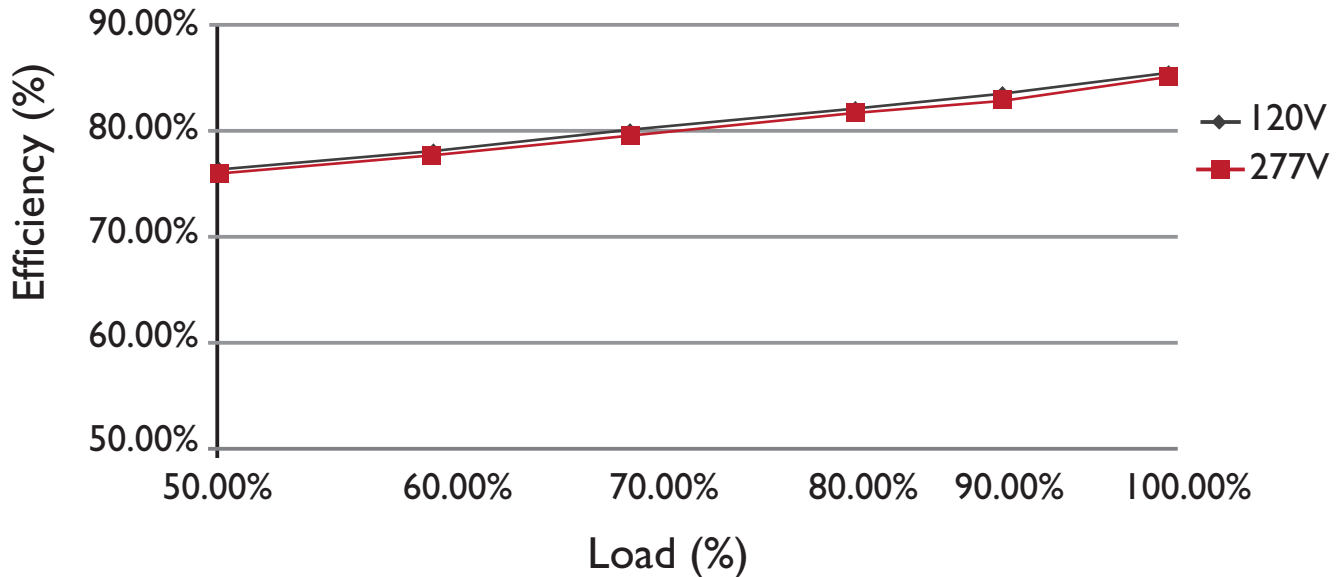


Power Factor v.s. Load

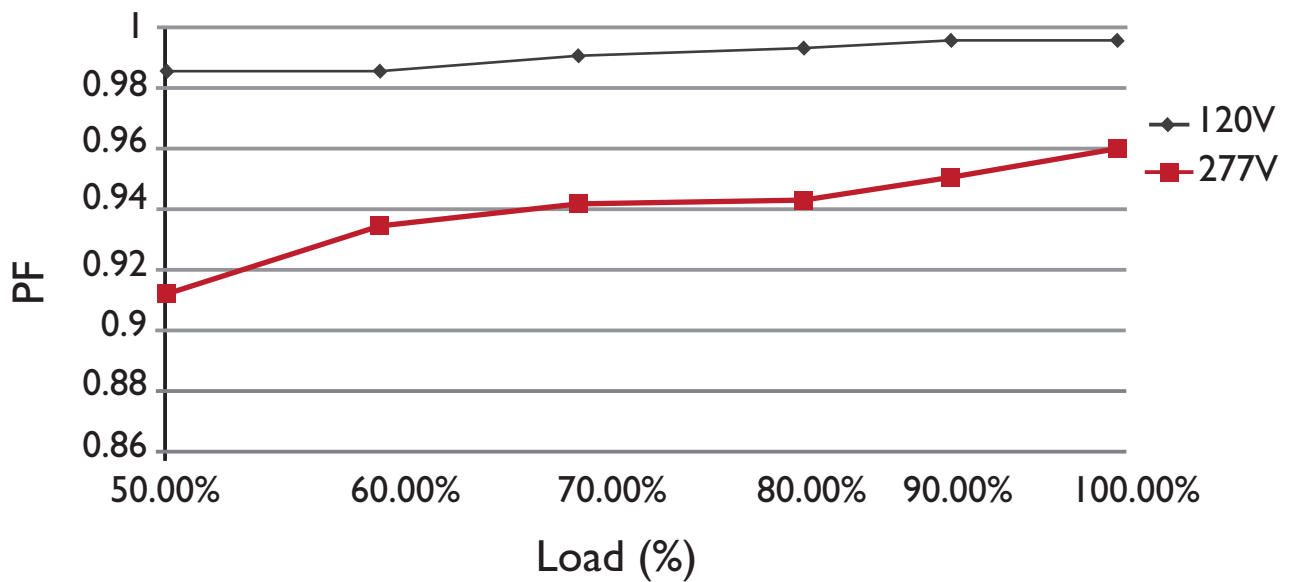


3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Output Current v.s. Dimming

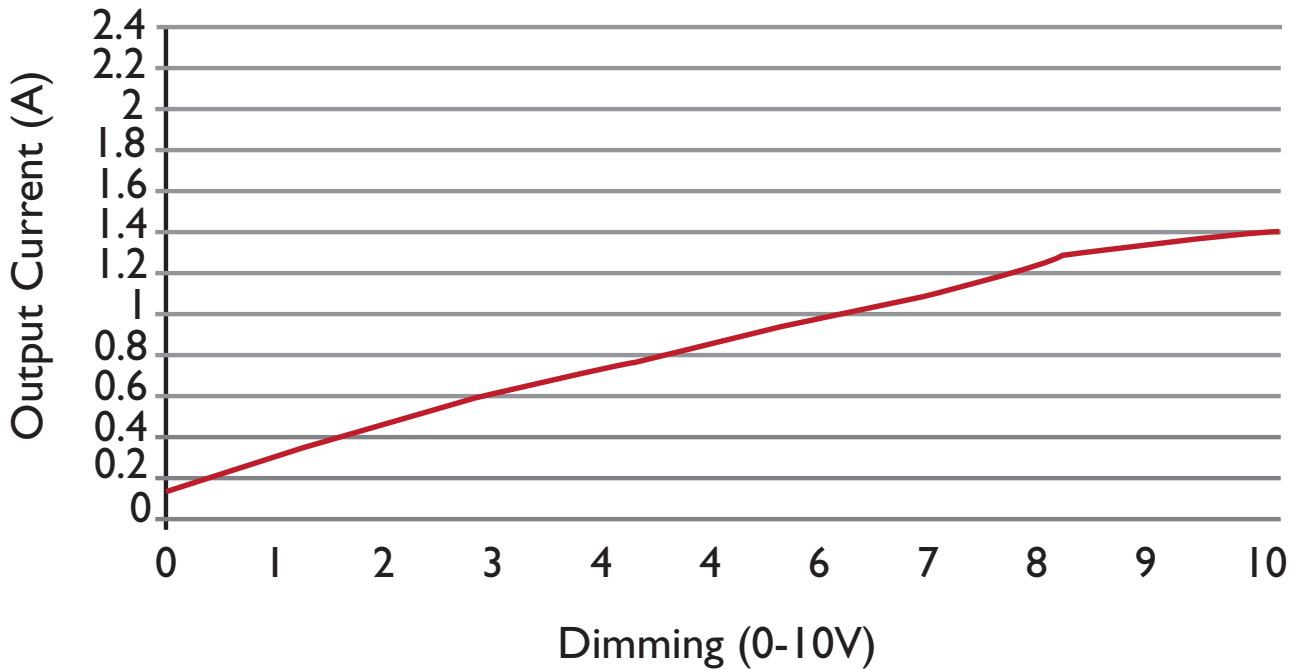

Output Current v.s. Resistance

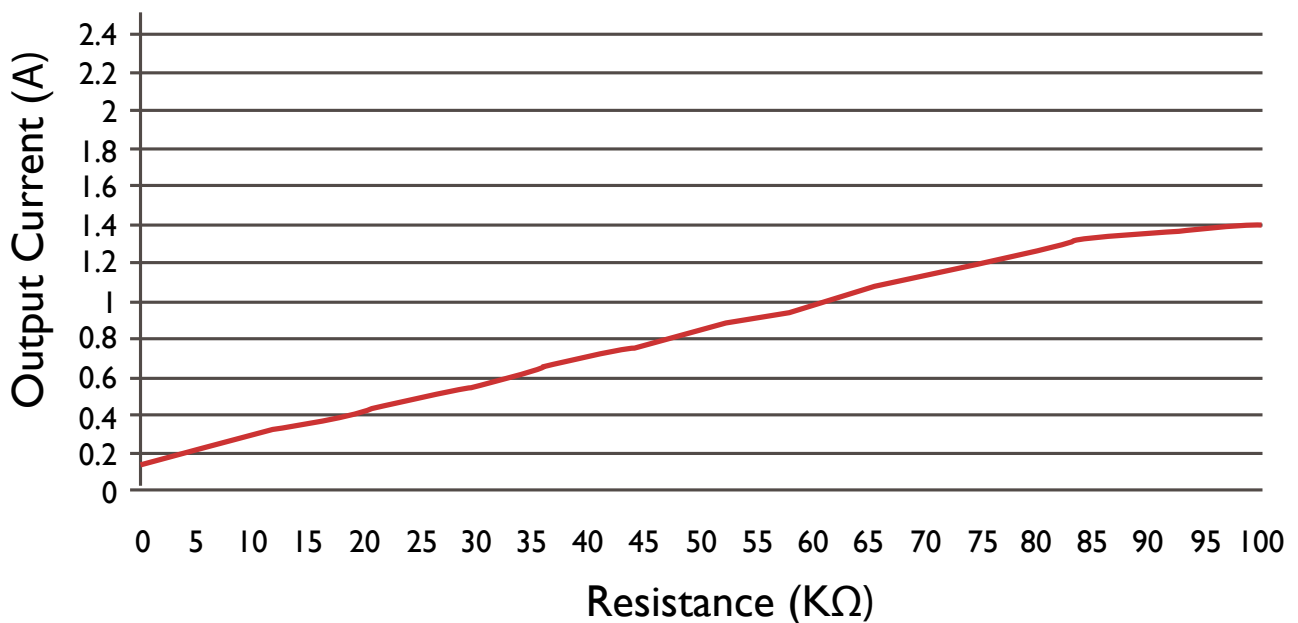

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.