

ENGLISH WIRING DIAGRAM

ACEPG201555SCP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 130 mA
- Input Power: 11 W
- Output Voltage: 15-55 V
- Output Current: 350 mA - 1350 mA
- Output Power: 20 W
- Battery Voltage: 9.6 V
- Battery Charge Current: 450 mA

- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

CSA C22.2 No. 141, Emergency Lighting Equipment
Appareil d'éclairage de secours

UL 85
LISTED
EMERGENCY LIGHT & POWER SUPPLY
POWER 10
SLG2
E50729


POWER
BC

TAA
COMPLIANT

800-375-6355
Made in Taiwan - AM60

USE COPPER WIRE

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

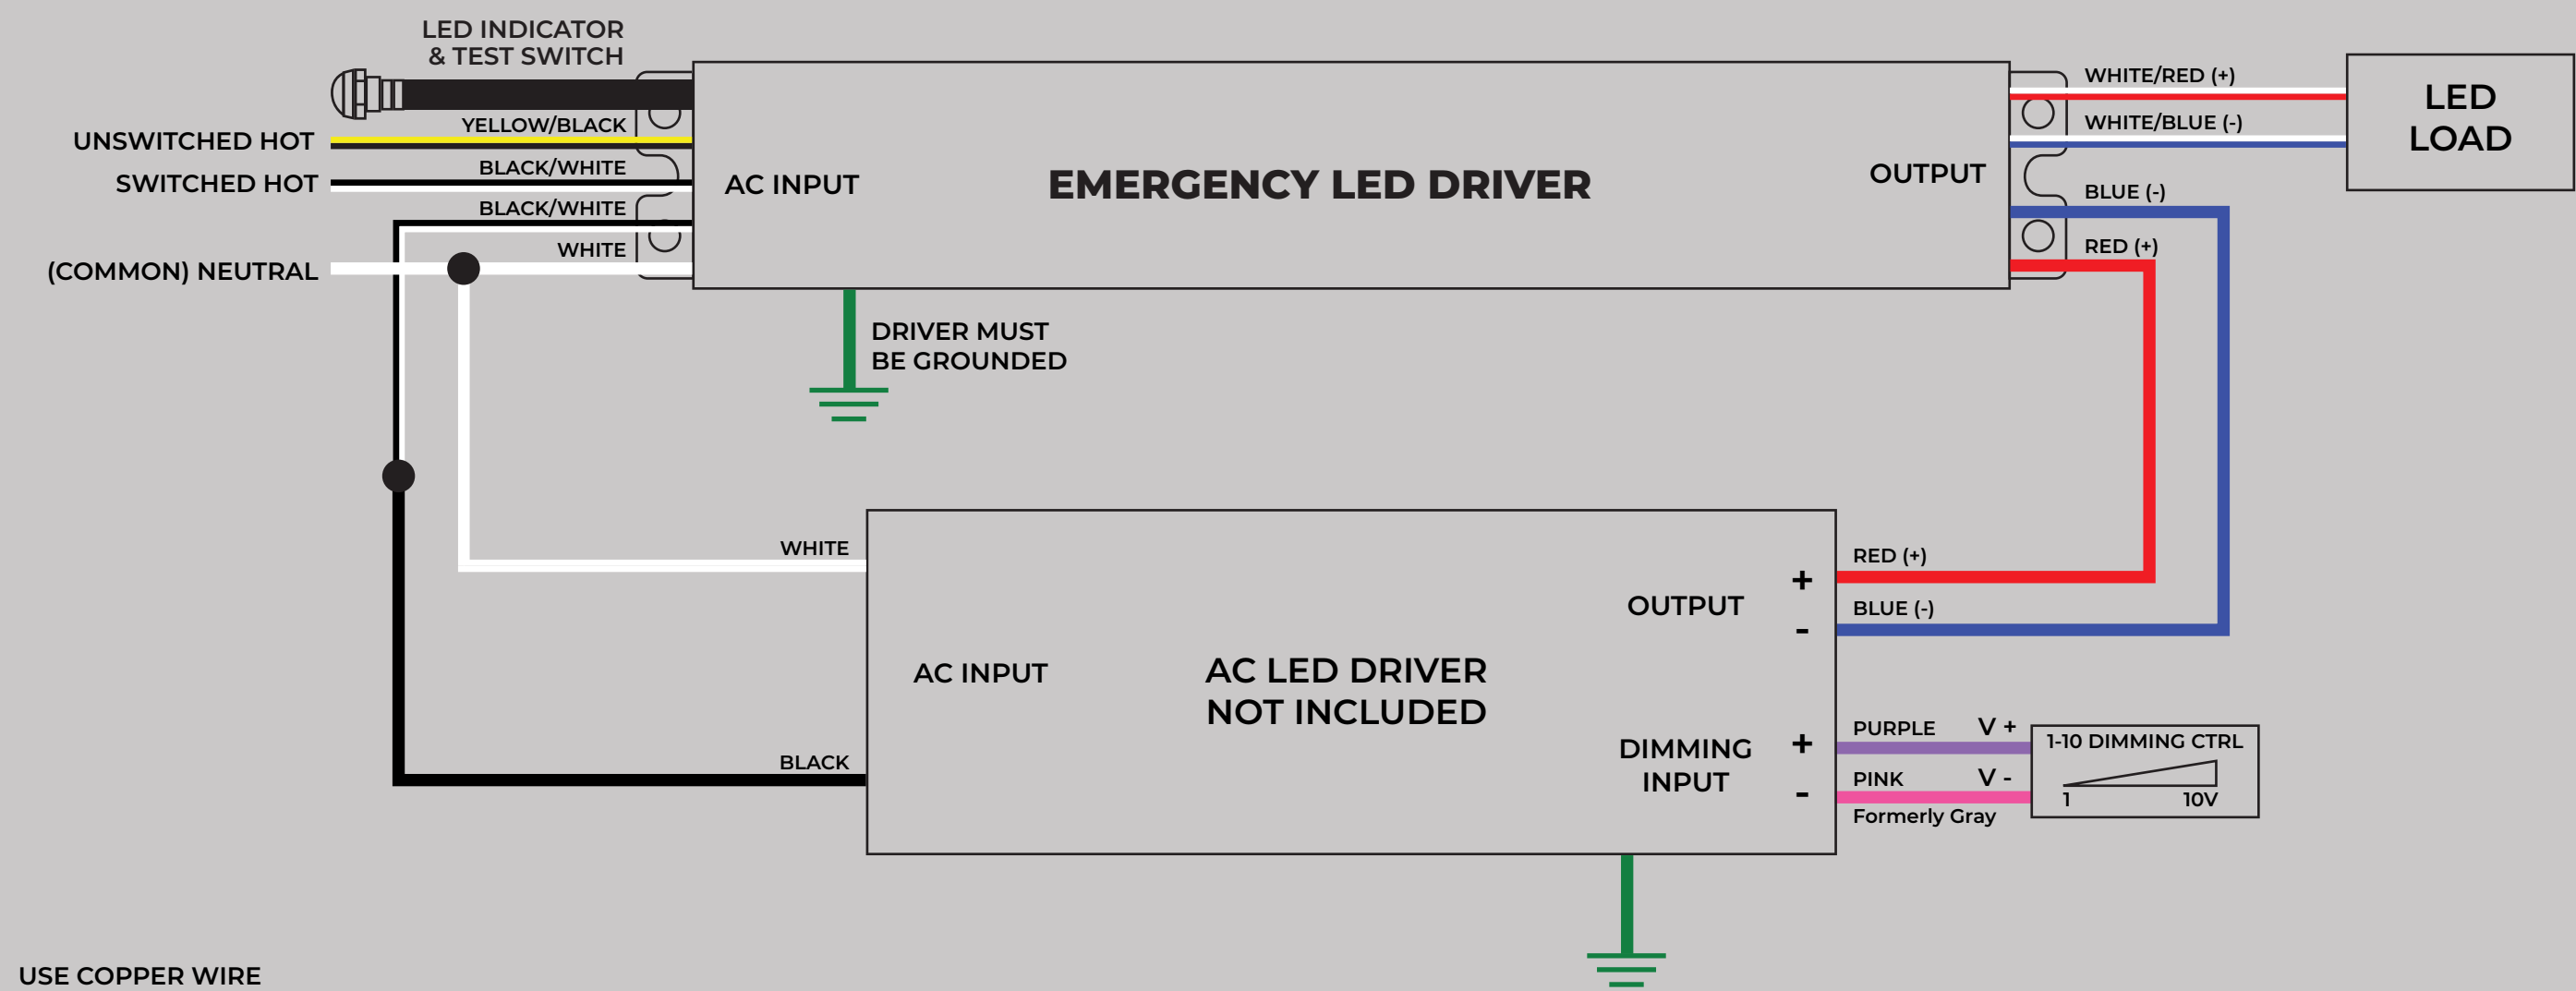

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

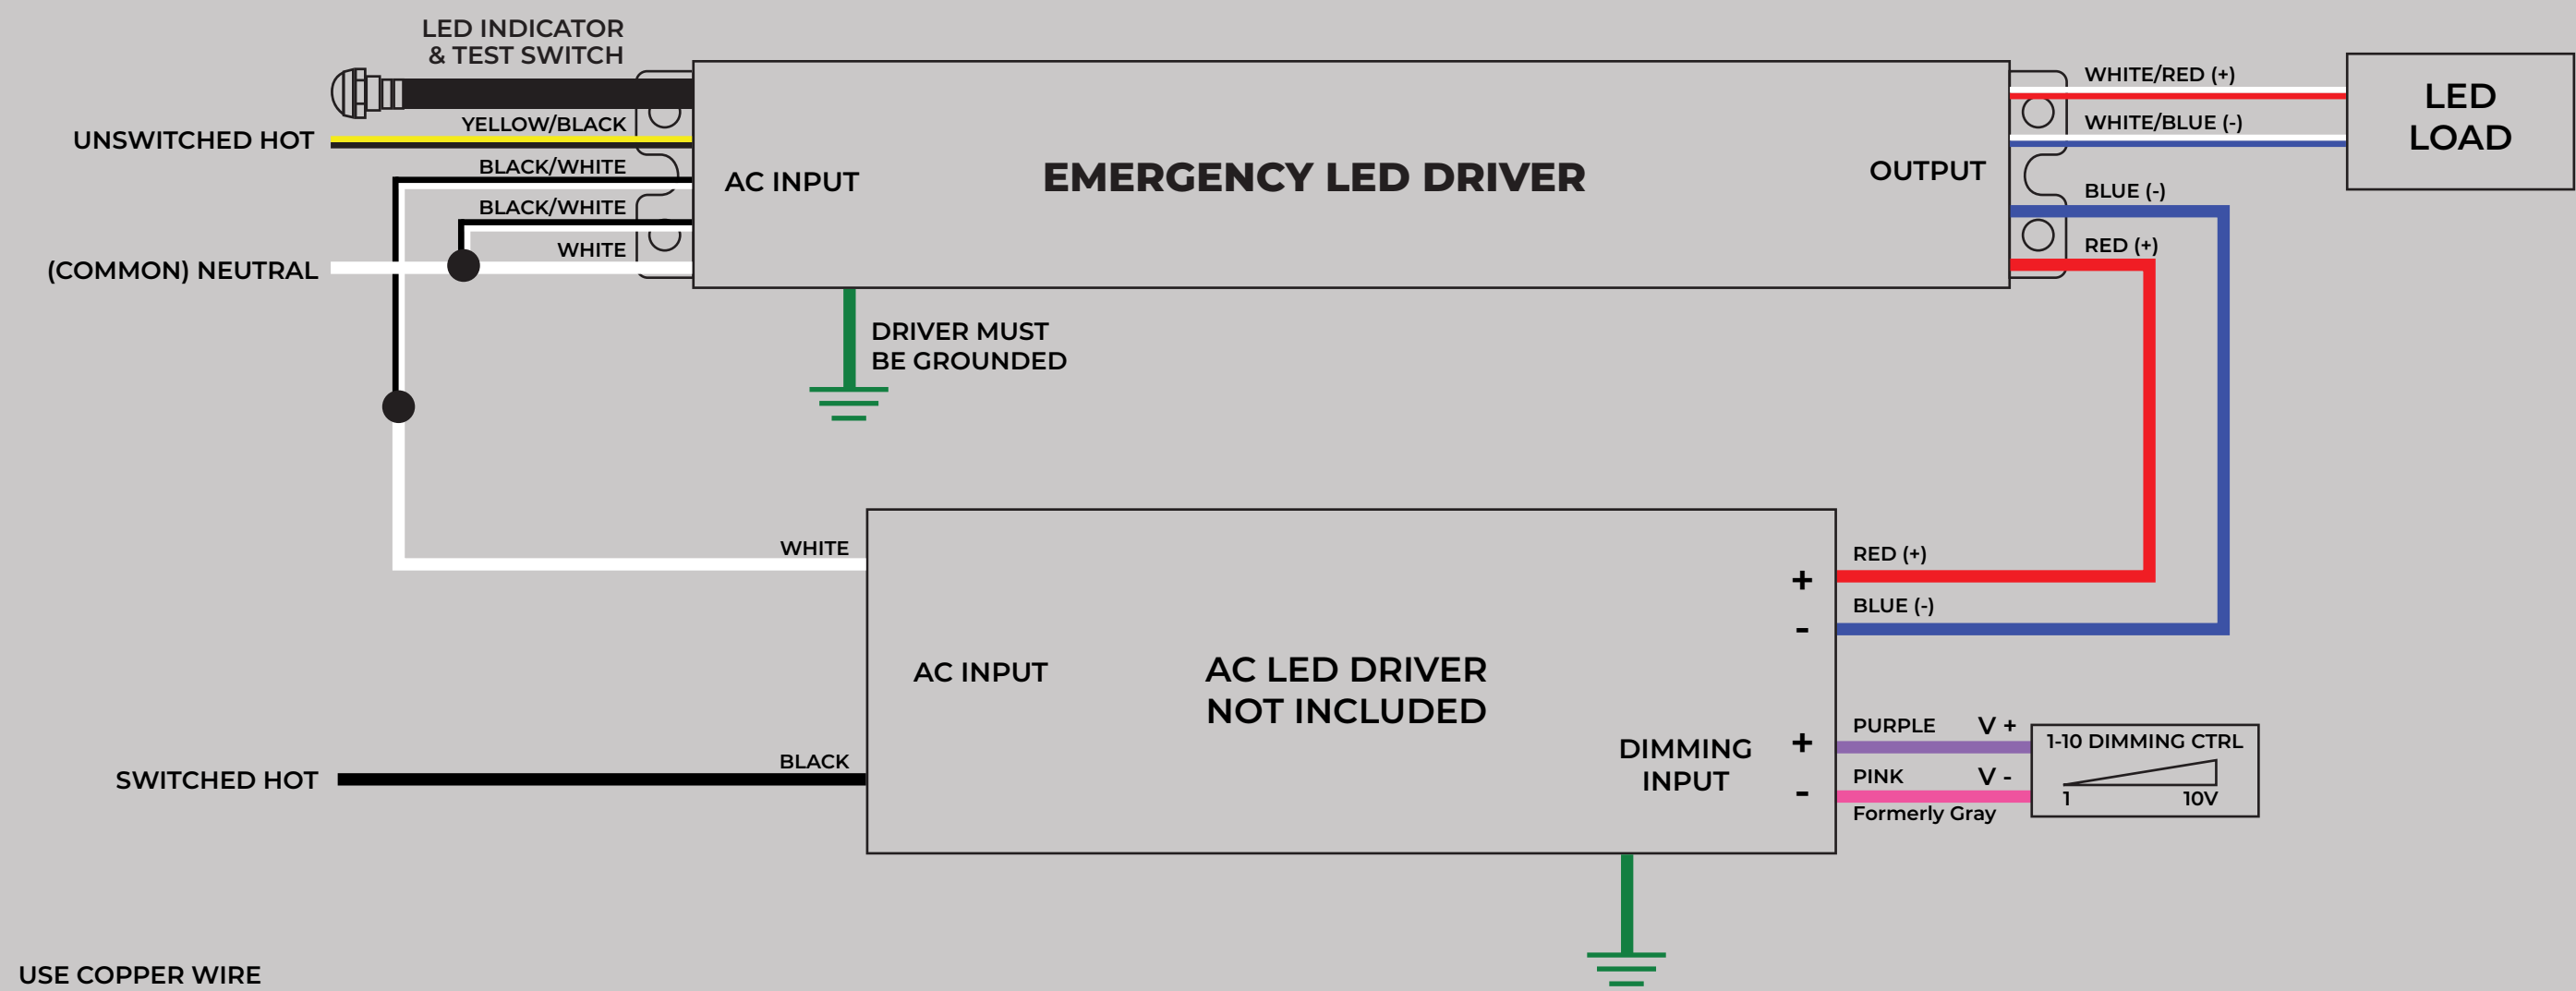


DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPG201555CP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 150 mA
- Input Power: 11 W
- Output Voltage: 15-55 V
- Output Current: 360 mA - 1350 mA
- Output Power: 20 W
- Battery Voltage: 9.6 V
- Battery Charge Current: 450 mA

- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours


UL LISTED
EMER. LIGHT &
POWER IO
SLG2
E50729

POWER
POWER
BC

TAA
COMPLIANT

800-375-6355
Made in Taiwan - AM60

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

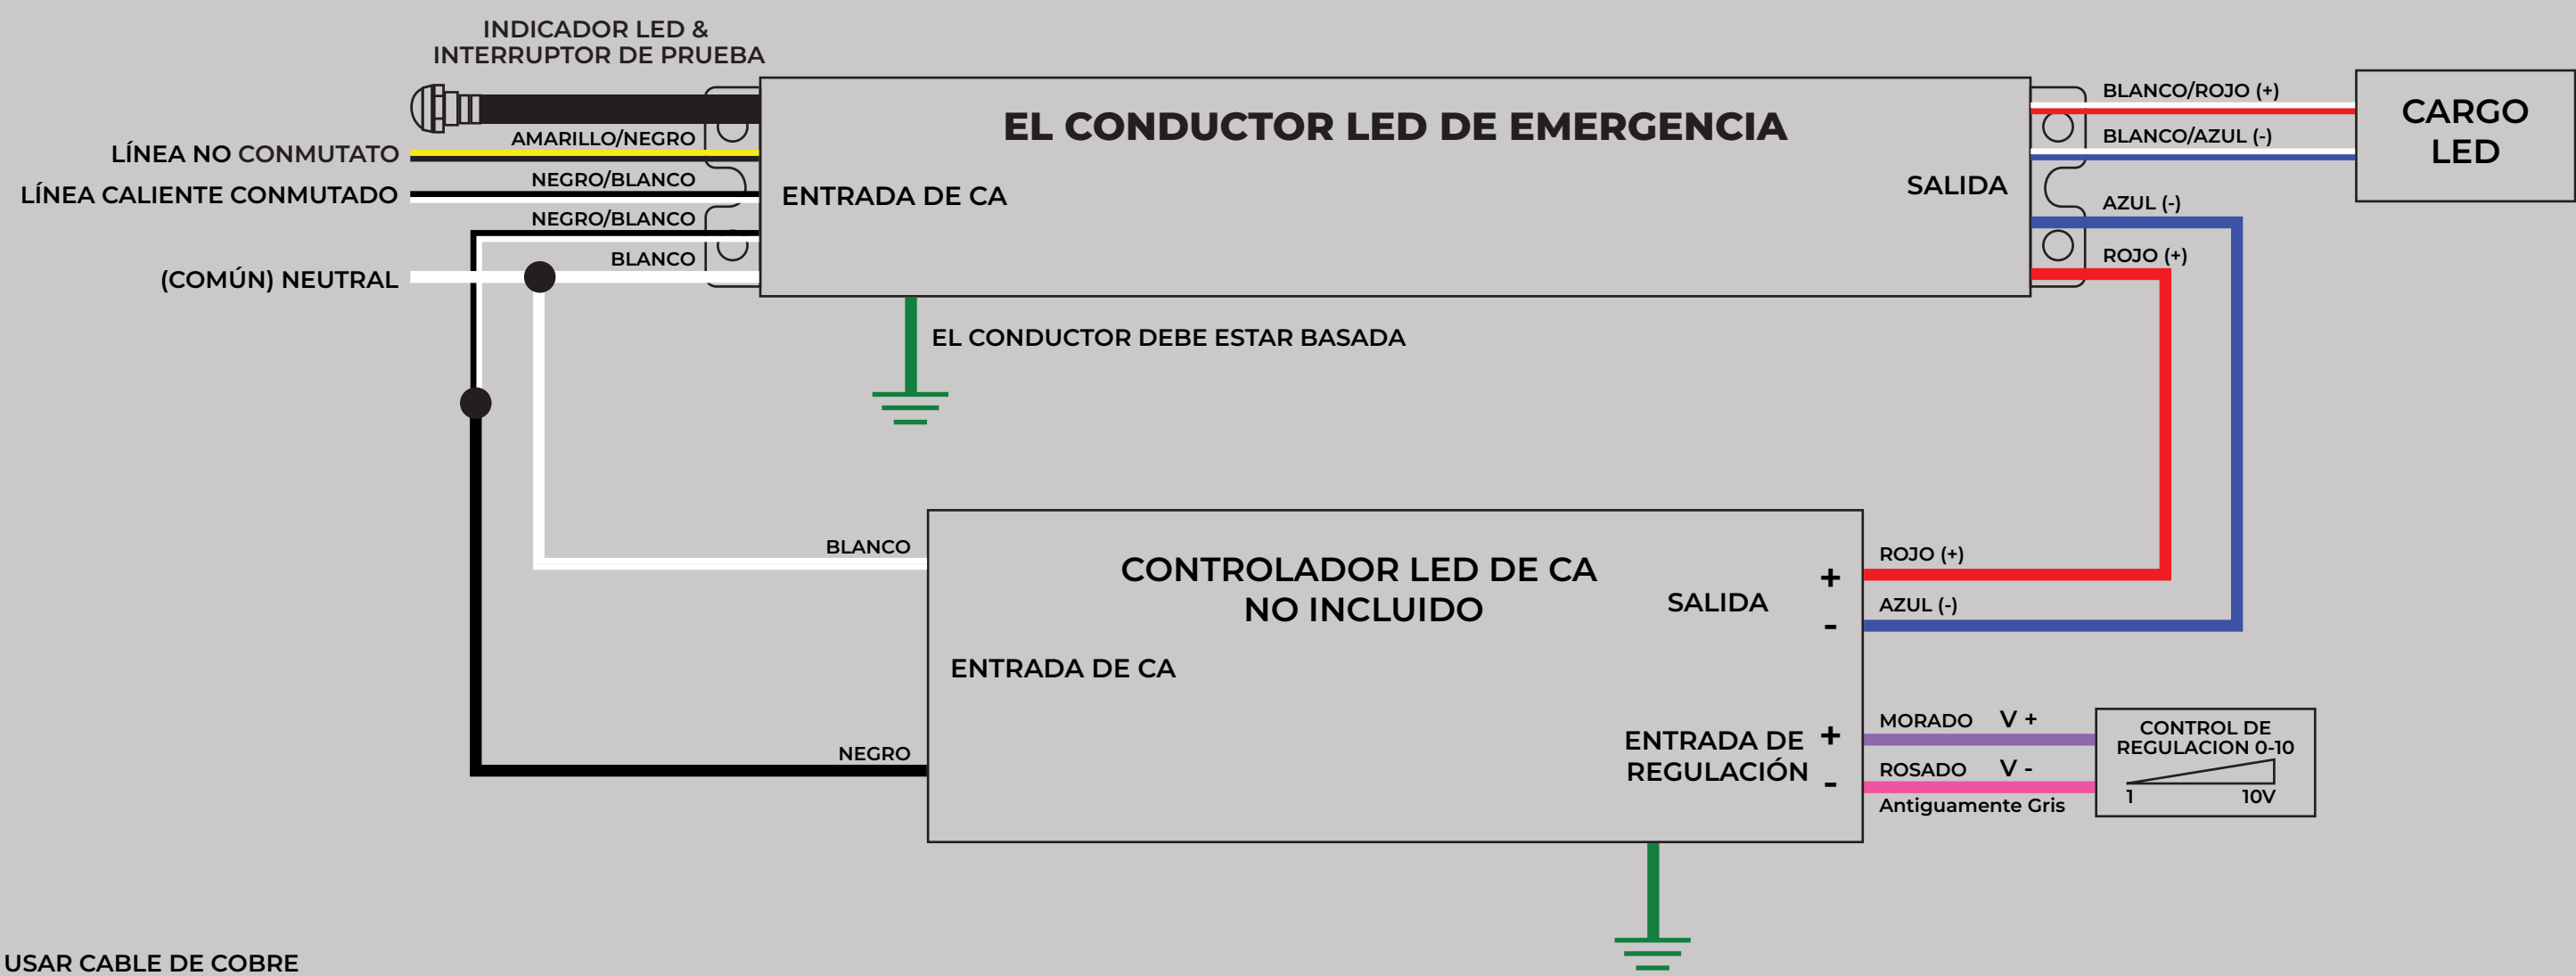

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

