

ENGLISH WIRING DIAGRAM

ACEPG1030130CP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 30-130 V
- Output Current: 77 mA - 333 mA
- Output Power: 10 W
- Battery Voltage: 12.8 V

- Battery Charge Current: 185 mA
- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

CSA C22.2 No. 143
Emergency Lighting Equipment
Appareil d'éclairage de secours

UL LISTED
EMERGENCY & POWER EQ
50025


POWER QUALITY
POWER IQ
TAA

MADE IN TAIWAN

800-375-6355


USE COPPER WIRE

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

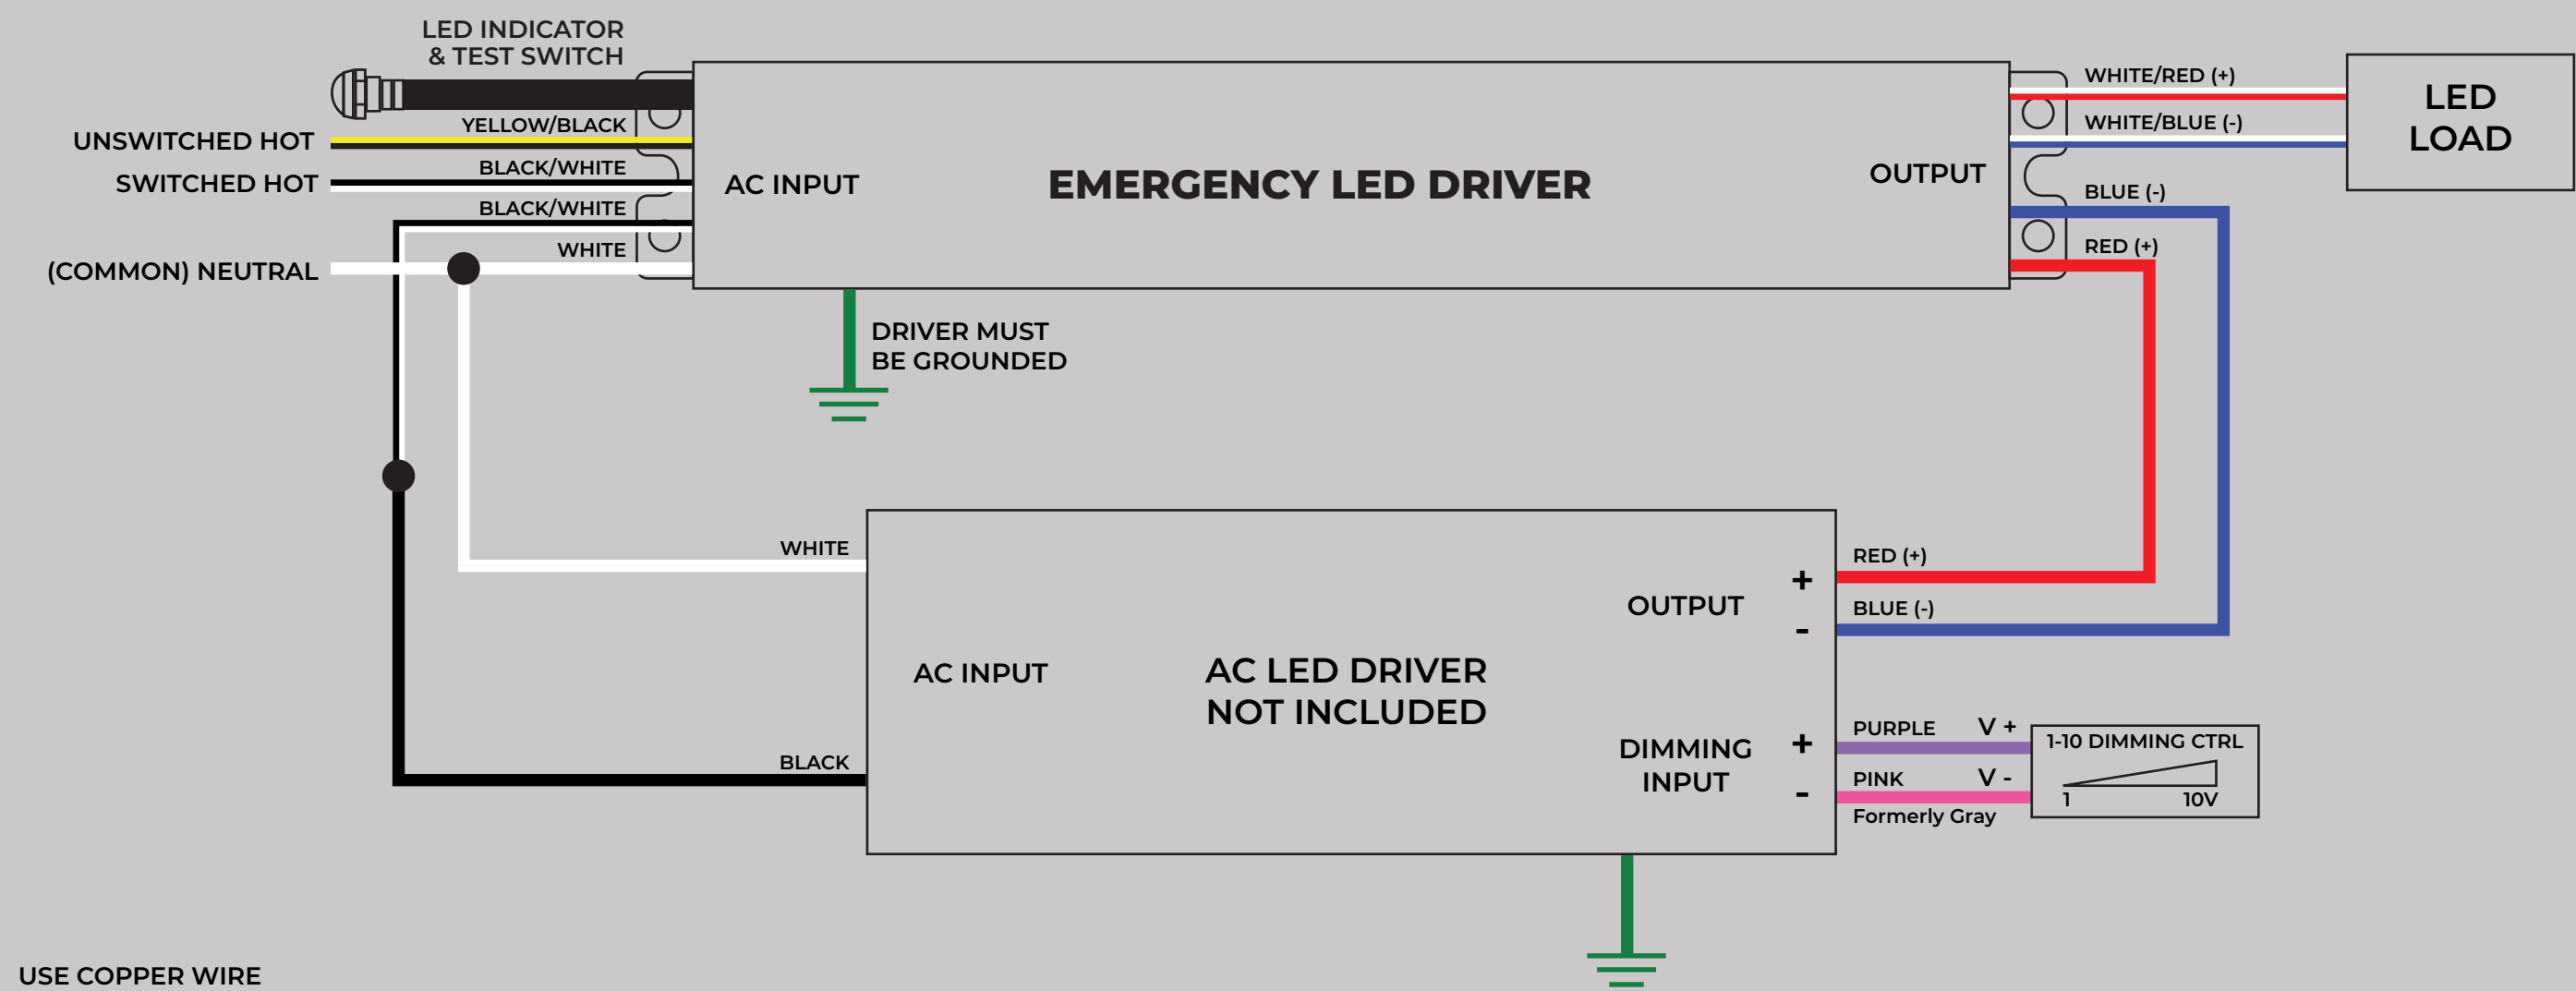

USE COPPER WIRE

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

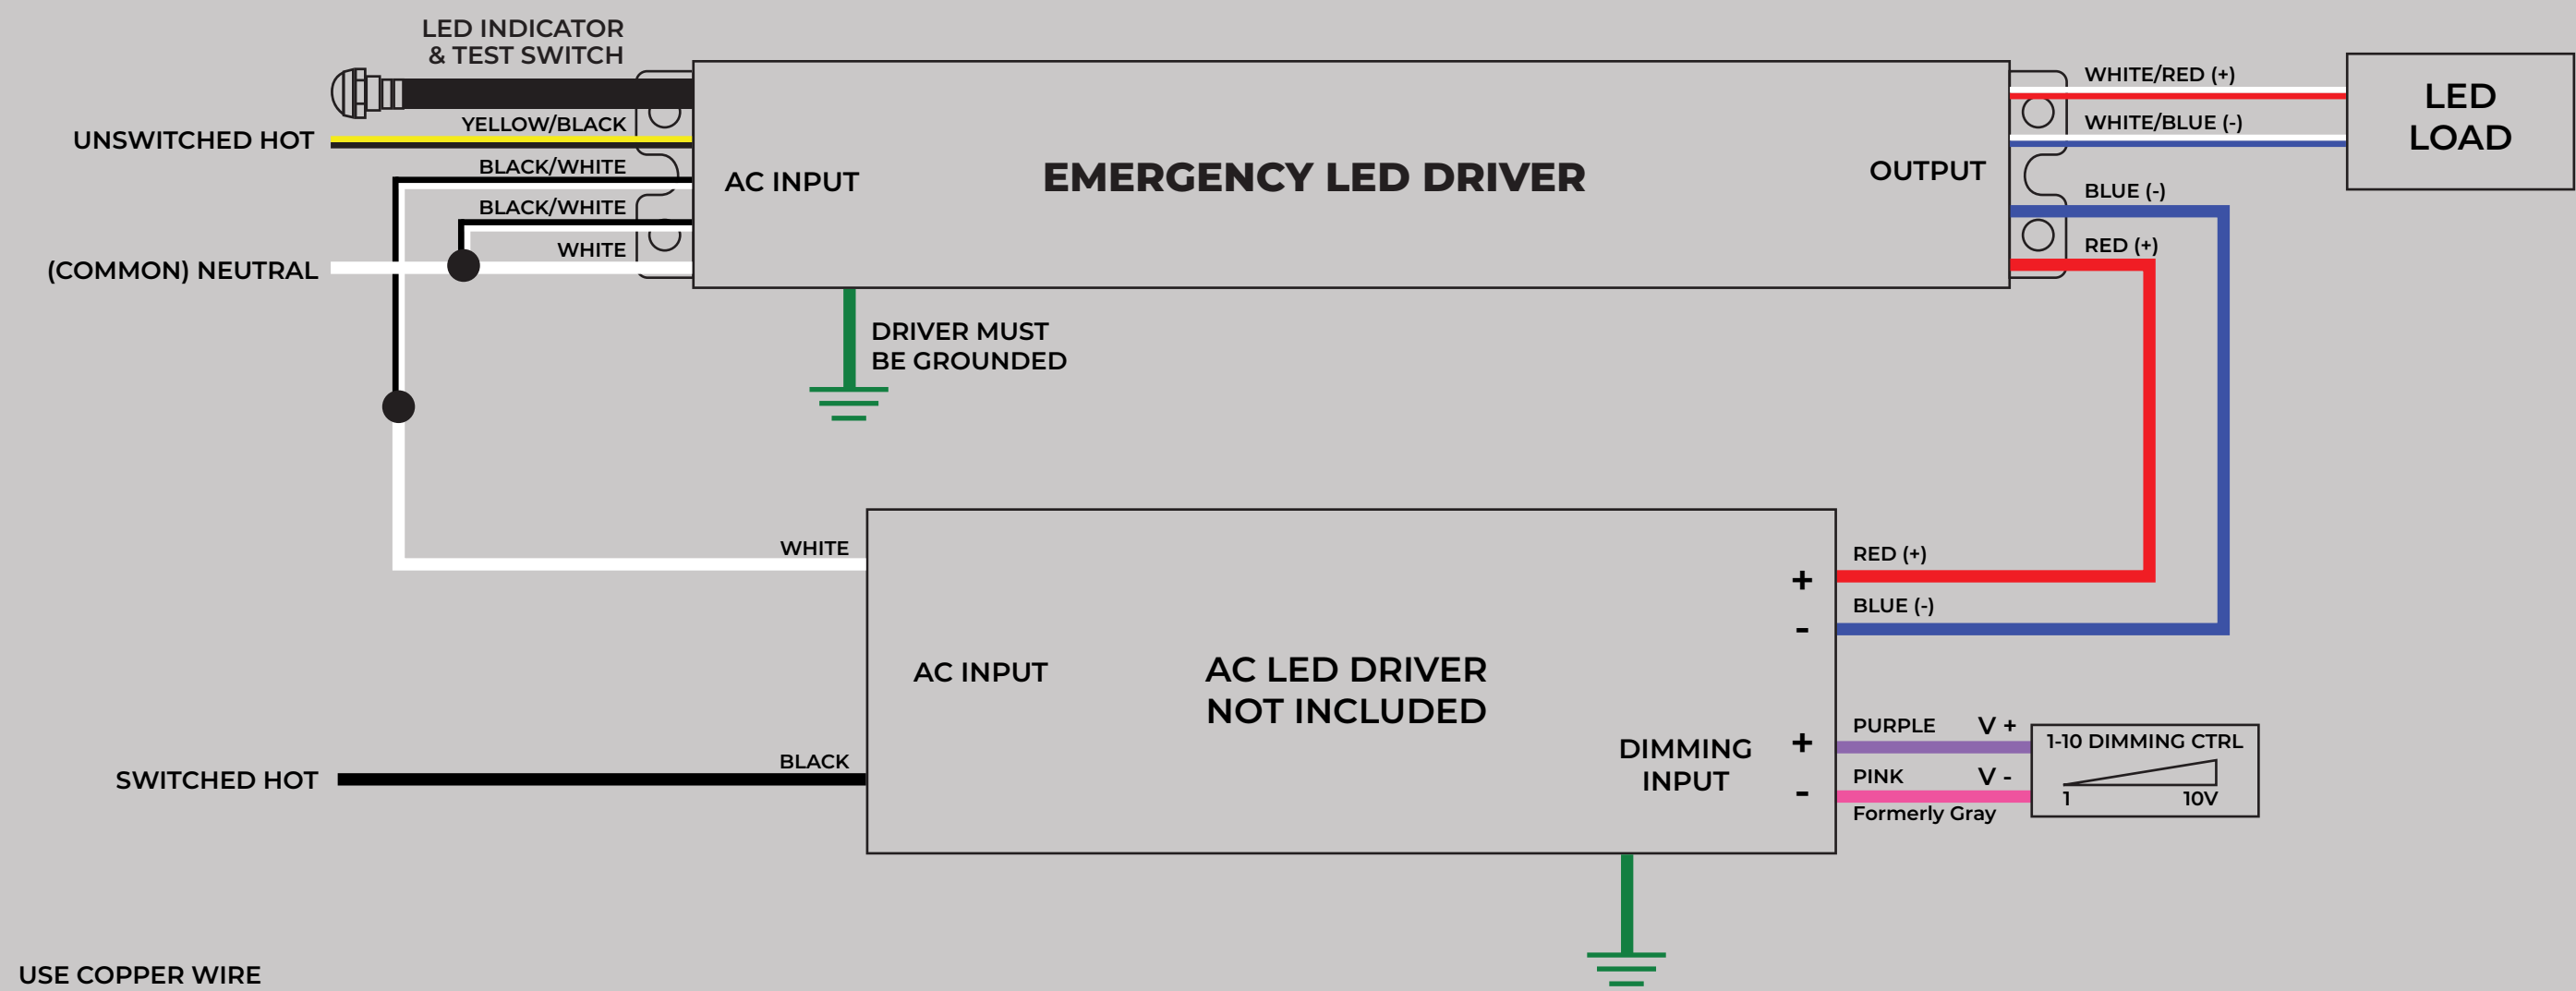

USE COPPER WIRE

DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPC1030130CP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 30-130 V
- Output Current: 77 mA - 333 mA
- Output Power: 10 W
- Battery Voltage: 12.8 V

- Battery Charge Current: 185 mA
- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours

UL 188
EMERGENCY LIGHT & POWER SUPPLY
E60779


POWER
QUALITY
MANUFACTURING
BC

TAA
COMPLY

MADE IN TAIWAN - AM210

ACE LEDS
800-375-6355

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

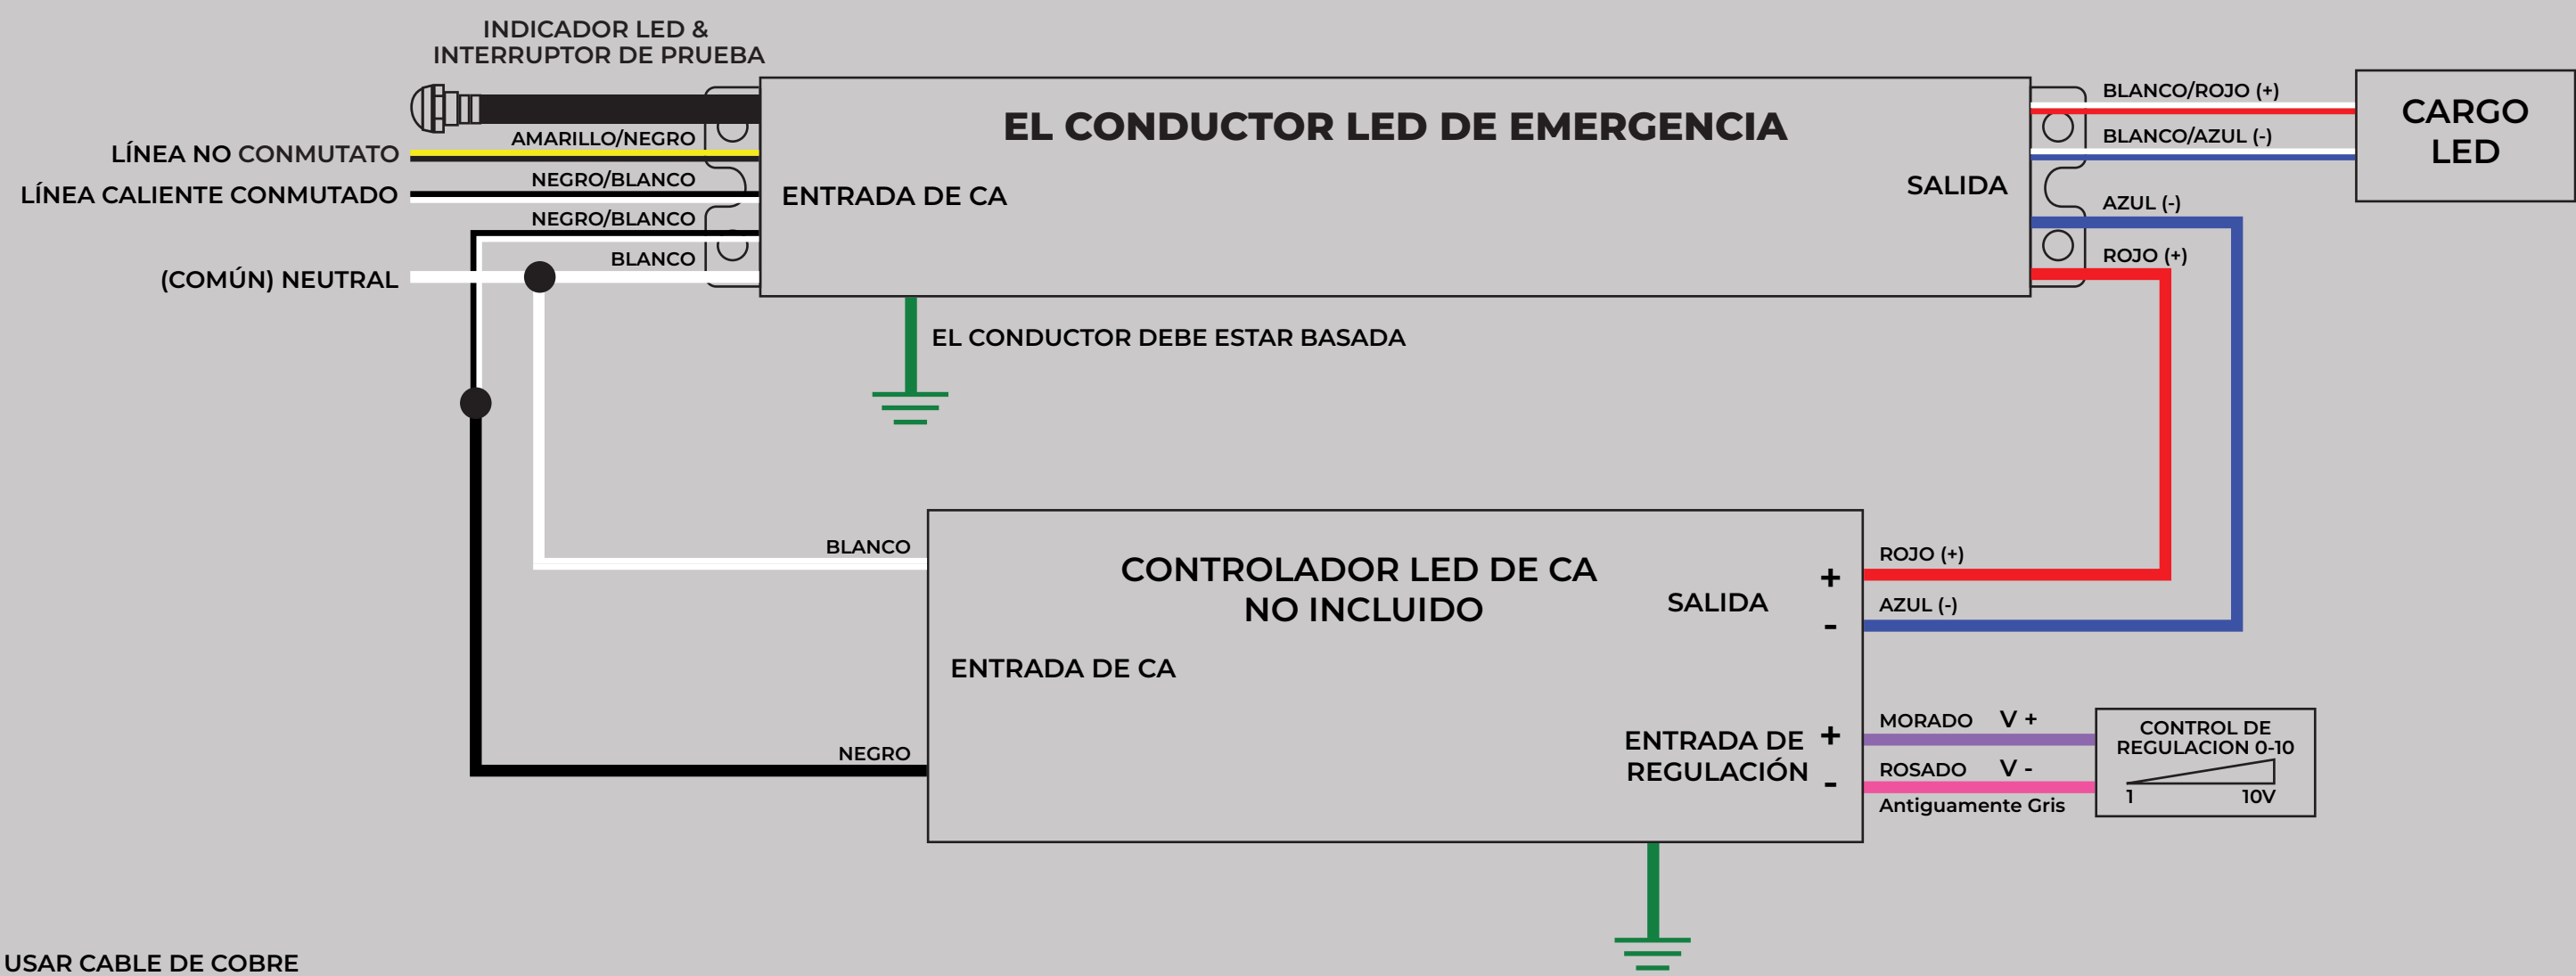

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

