

ENGLISH WIRING DIAGRAM

ACEPG10T1555CP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 18-55 V
- Output Current: 100 mA - 670 mA

- Output Power: 10 W
- Battery Voltage: 7.2 V
- Battery Charge Current: 500 mA
- Battery Charge Time (max): 24 hours
- Operating Duration (min): 30 minutes

- Ambient Temperature: -20 °C through 55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air handling or heated air outlets.

USE COPPER WIRE

POWER

C-Id Start

TAA

UL

CSA

CE

RoHS

REACH


CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours

Made in Taiwan - AM05

ACE LEDS


800-375-6355

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

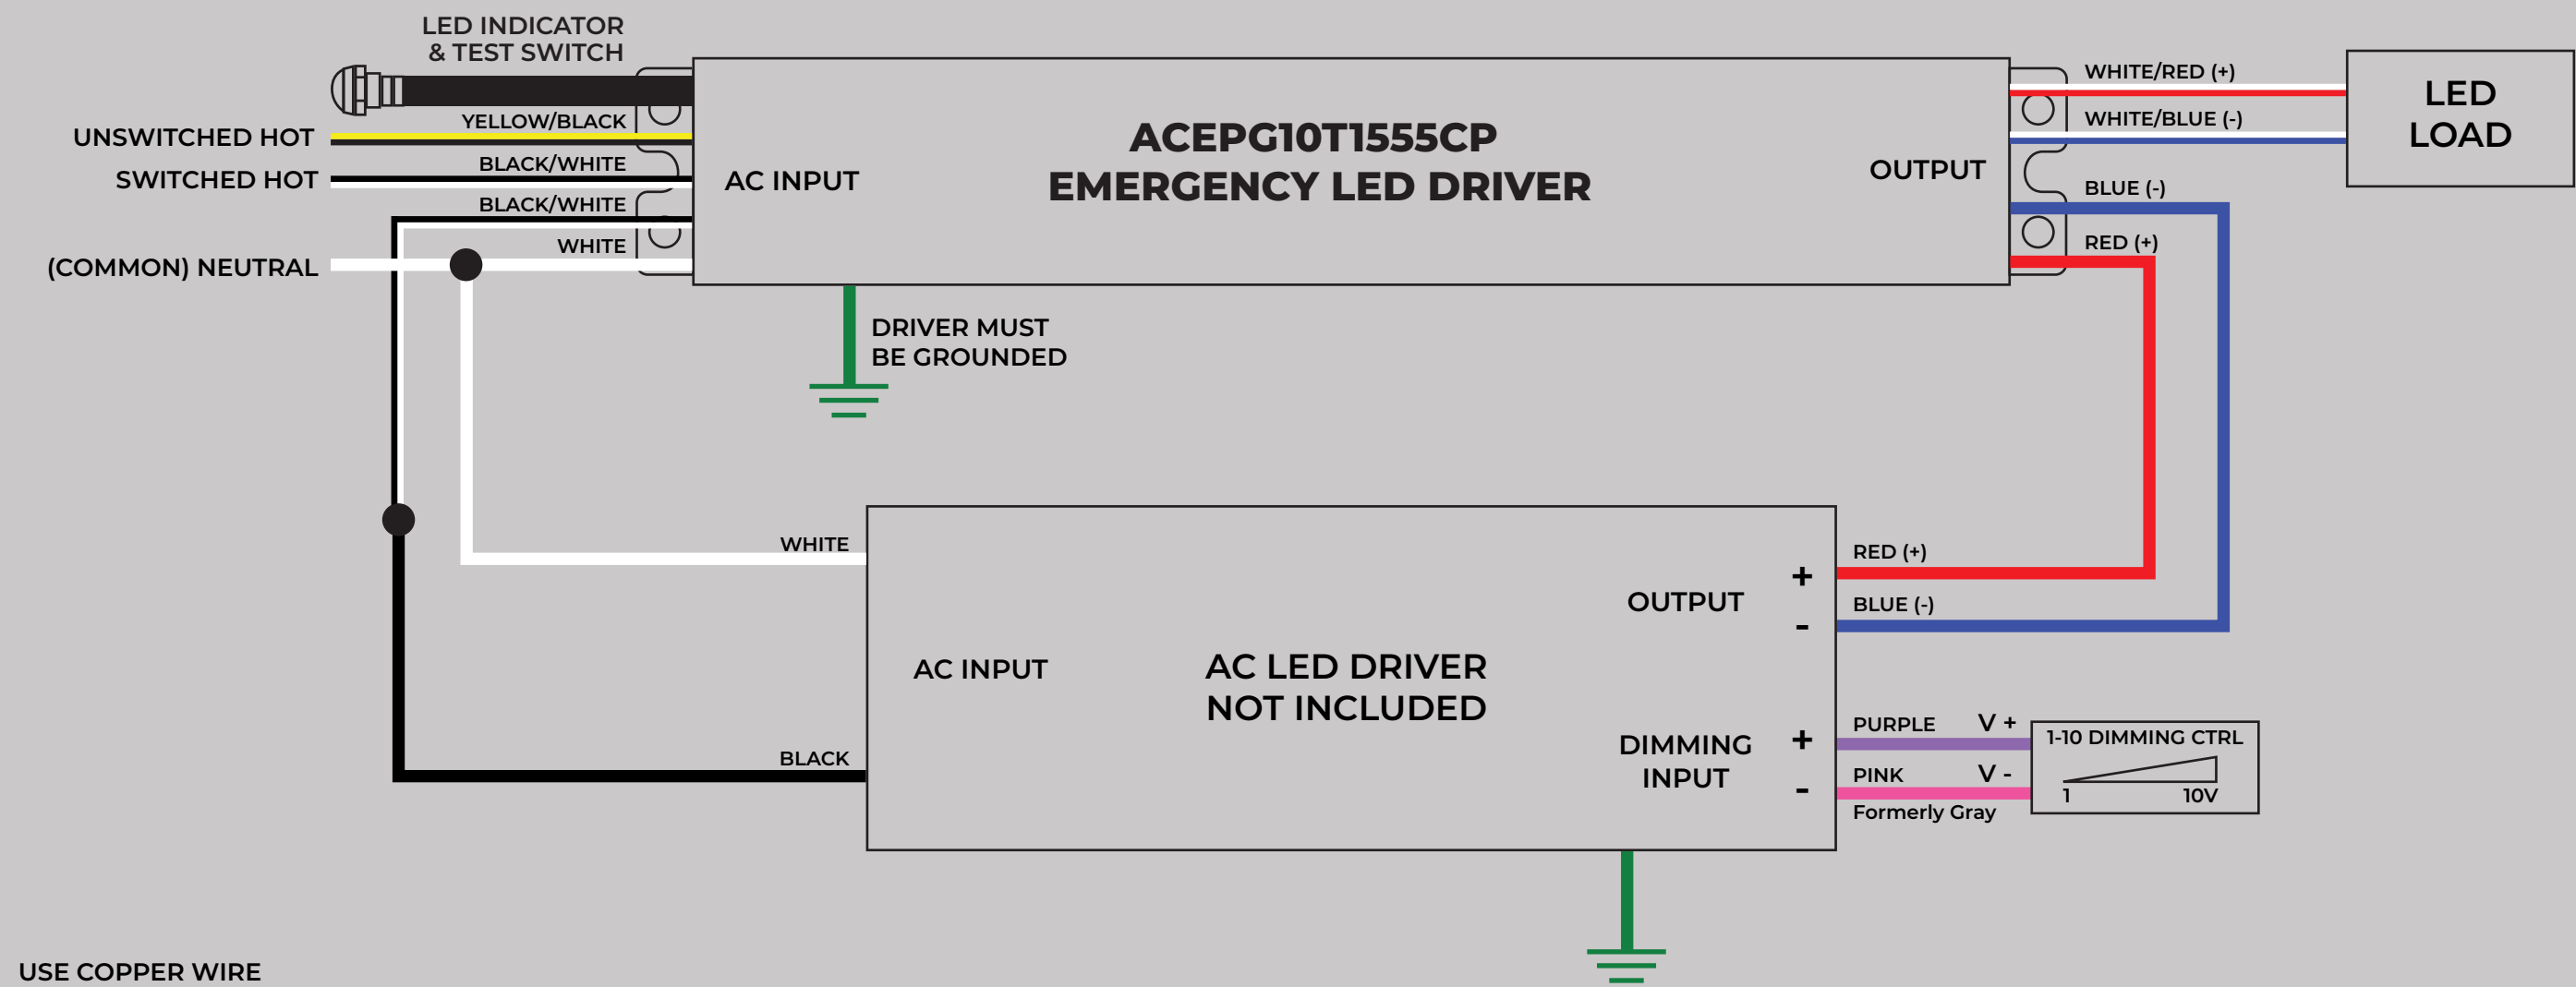

USE COPPER WIRE

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

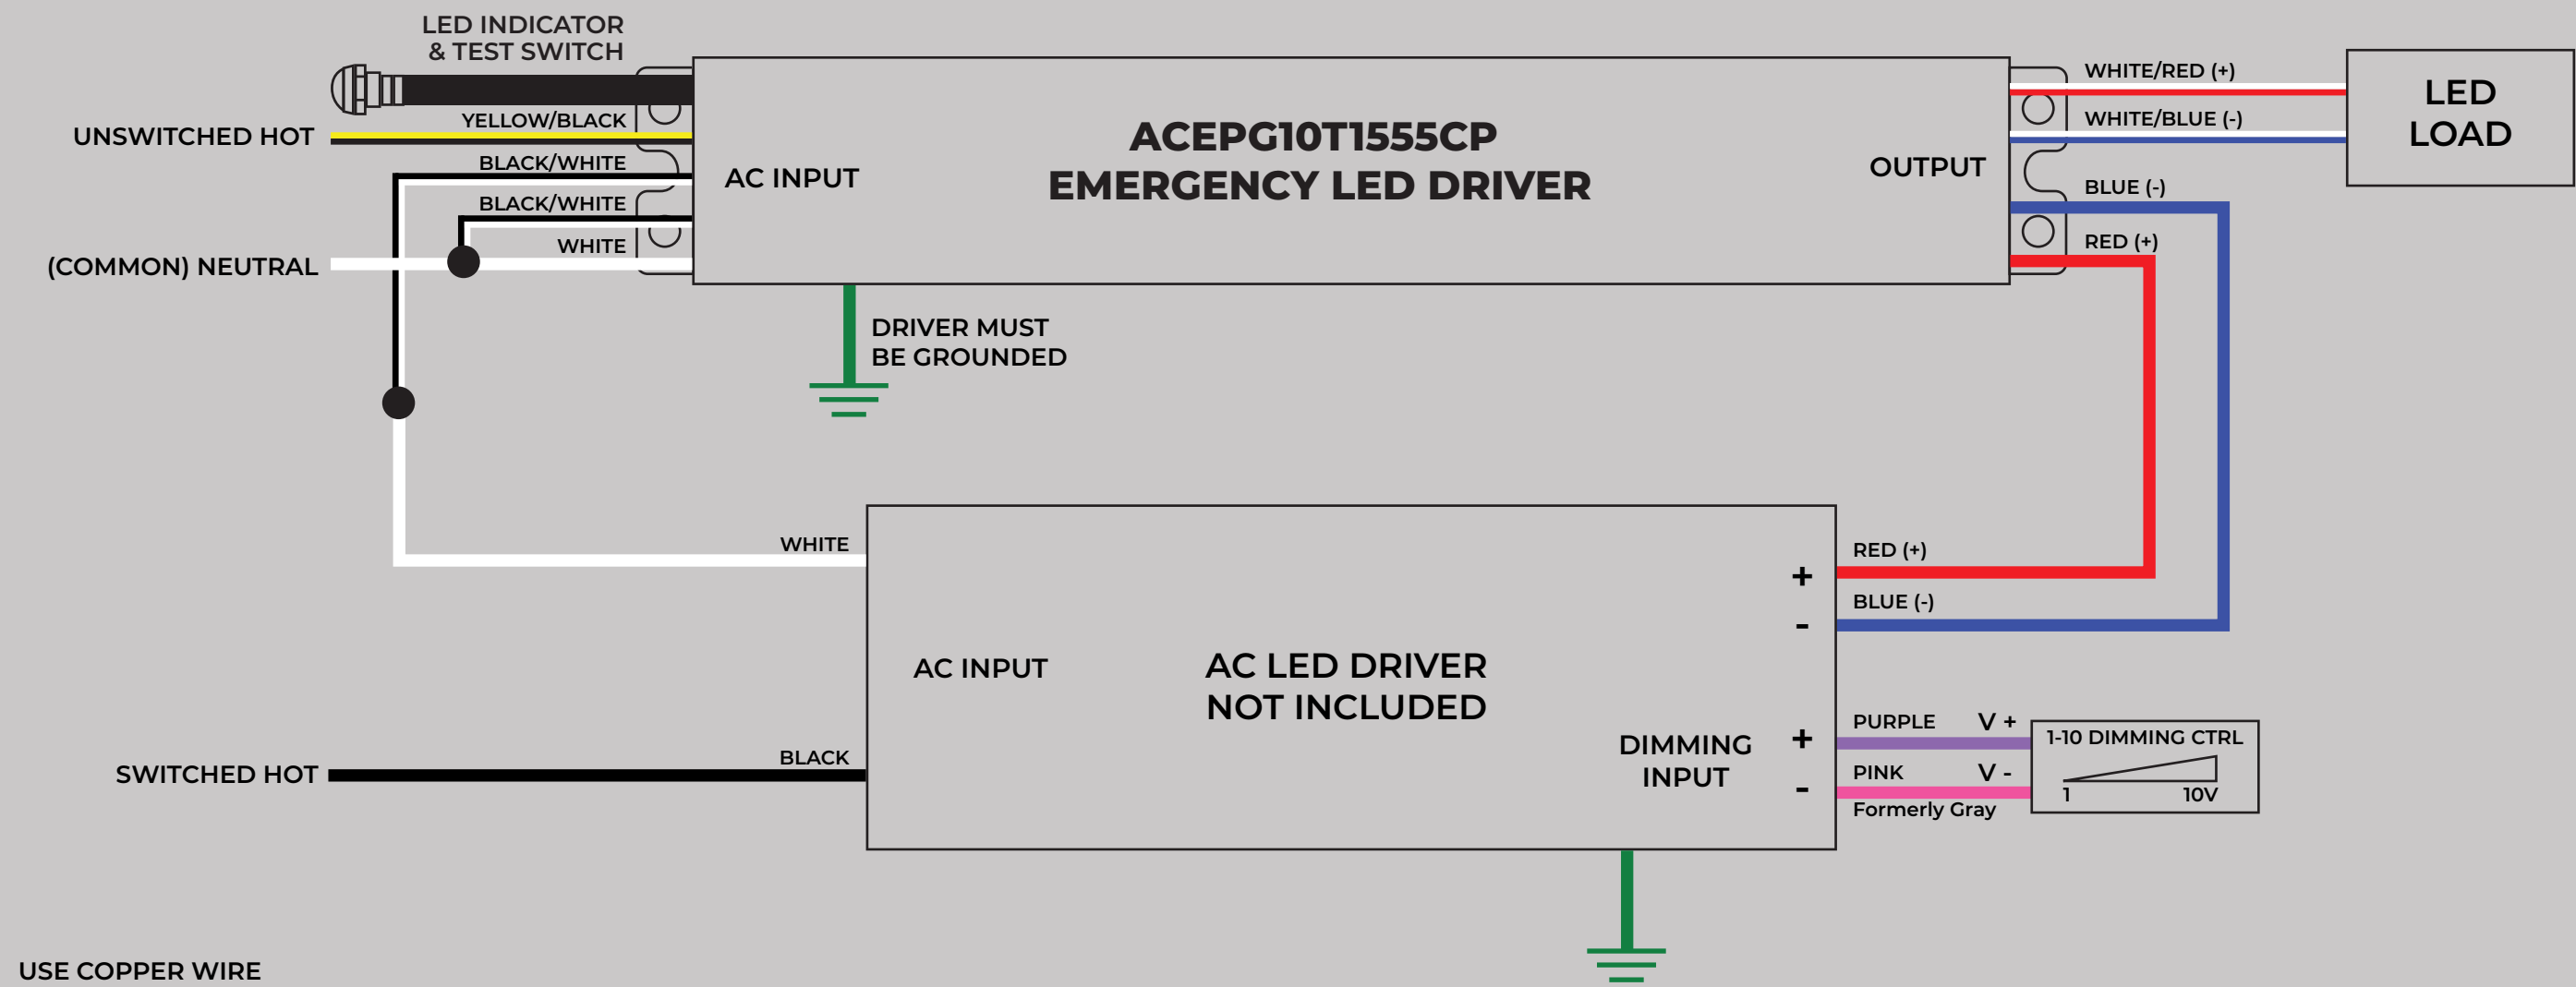

USE COPPER WIRE

DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPG10T1555CP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 15-55 V
- Output Current: 180 mA - 670 mA

- Output Power: 10 W
- Battery Voltage: 7.2 V
- Battery Charge Current: 500 mA
- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes

- Ambient Temperature: -20 °C through 55 °C
- Output Class: E Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit, BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

POWER

C-Id Start

TAA

WULF


UL

CSA C22.2 No. 143
Emergency Lighting Equipment
Appareil d'éclairage de secours

Made in Taiwan - AM105

ACE LEDS
800-375-6355

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

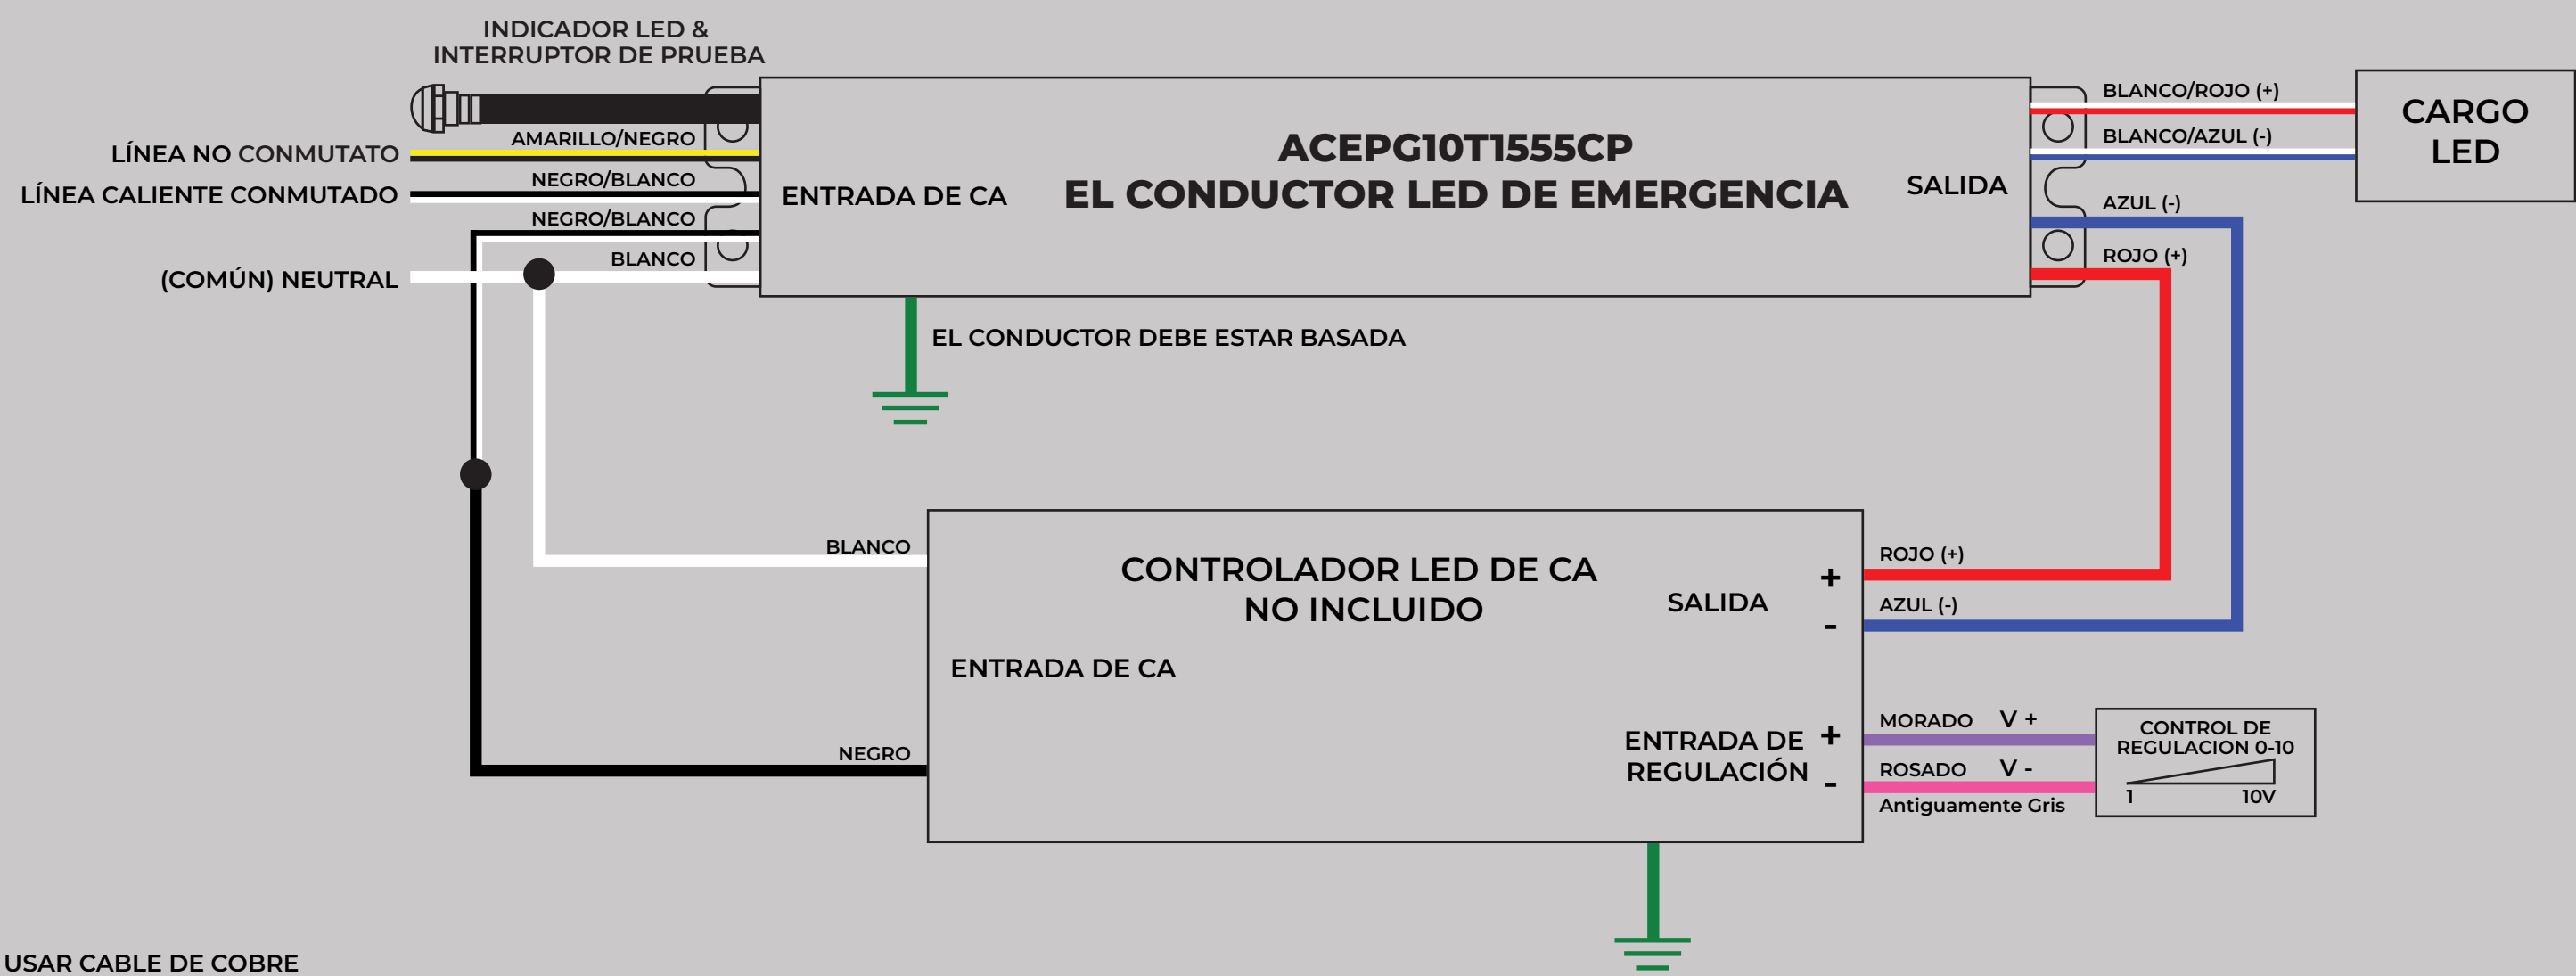

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

