

ENGLISH WIRING DIAGRAM

ACEPG61555BSPCP
EMERGENCY LED DRIVER

CSA C22.2 No. 143
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AMTMO

• Input Voltage: 120-277 V, 50/60 Hz
• Input Current (max): 10 mA
• Input Power: 8 W
• Output Voltage: 15-55 V
• Output Current: 100 mA - 400 mA
• Output Power: 6 W
• Battery Voltage: 4.8 V
• Battery Charge Current: 185 mA

• Battery Charge Time (min): 24 hrs
• Operating Duration (min): 90 min
• Ambient Temperature: 35-55 °C
• Output Class 2 Compliant
• Suitable for damp locations
• For factory or field installation
• For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only.
Discharge before opening. Sealed unit. BATTERY not replaceable.
Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.


USE COPPER WIRE

POWER

TAAI

800-375-6355

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

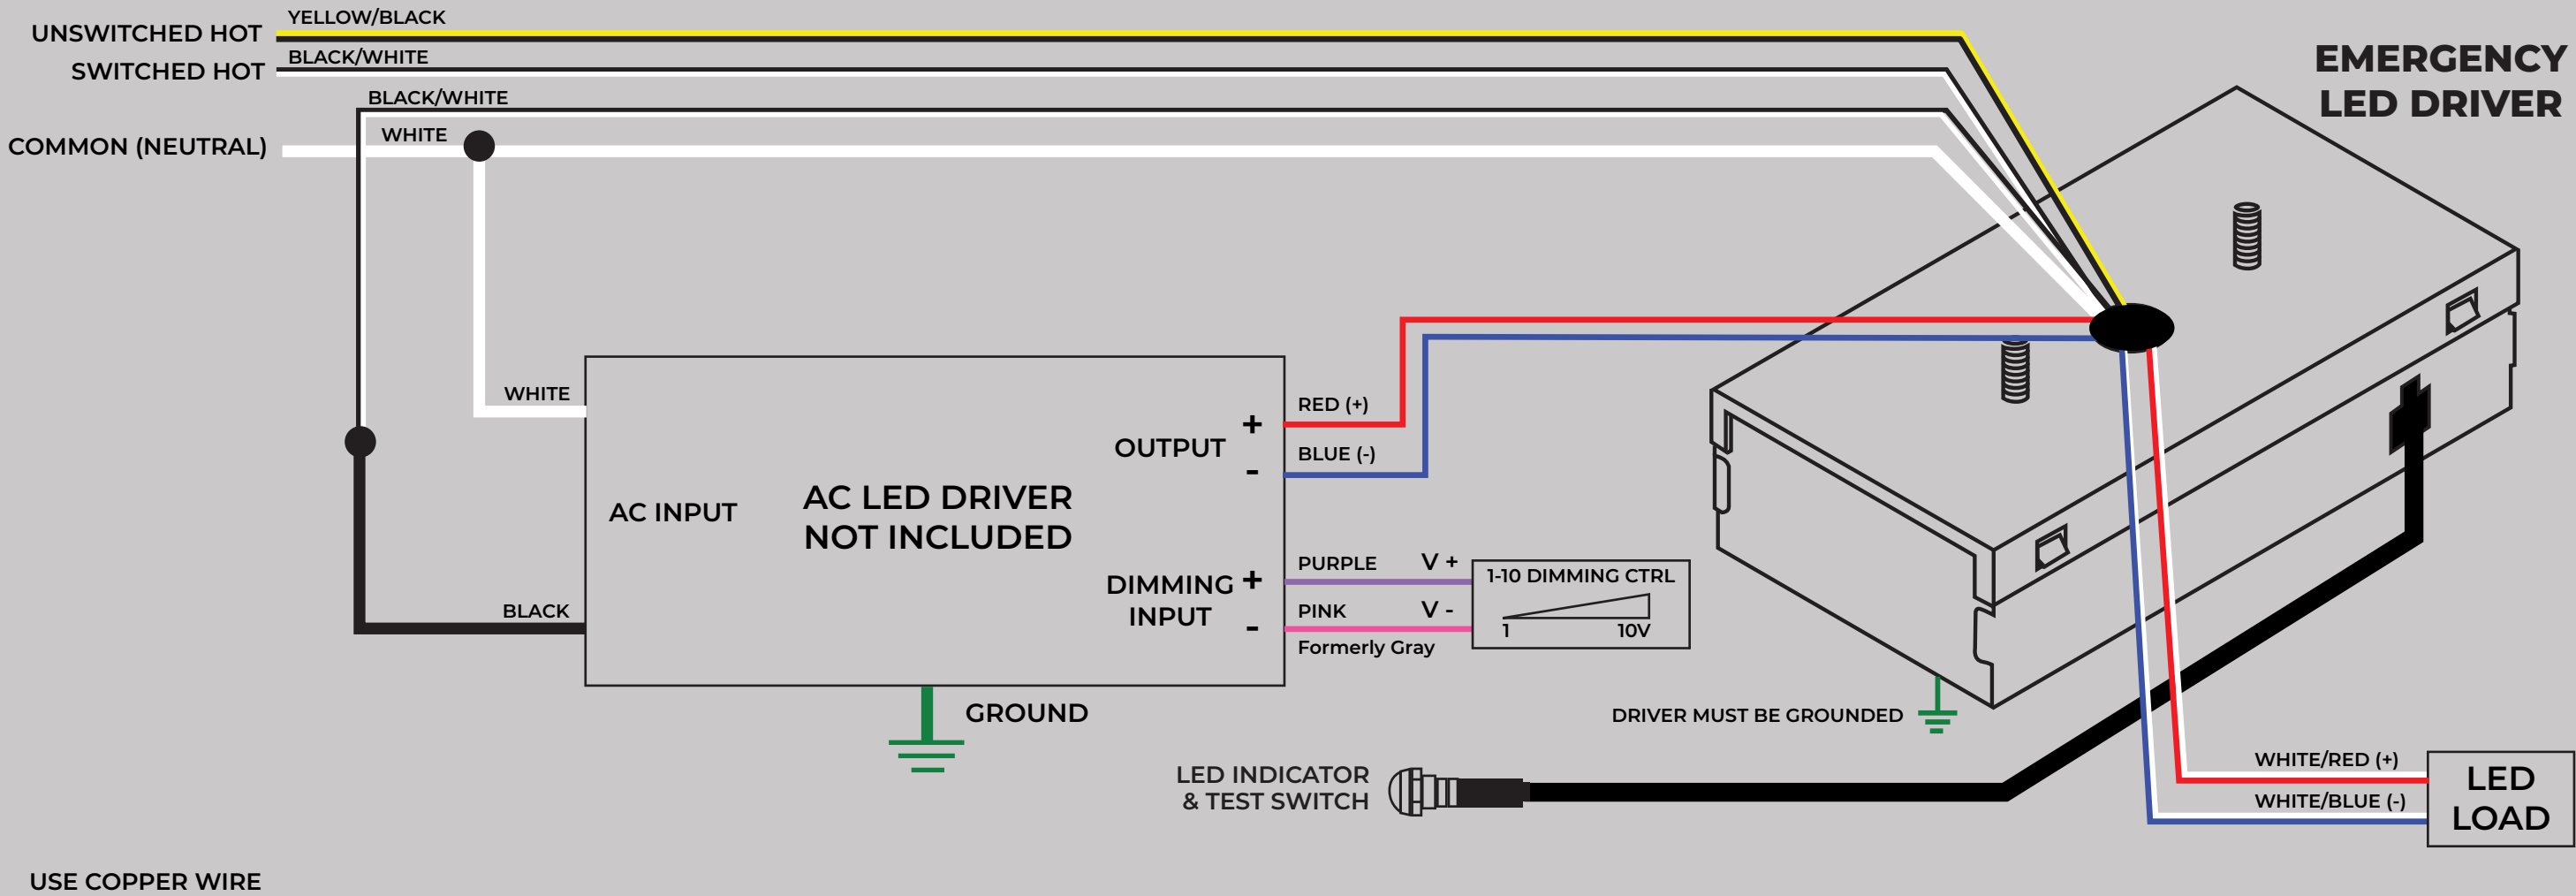

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

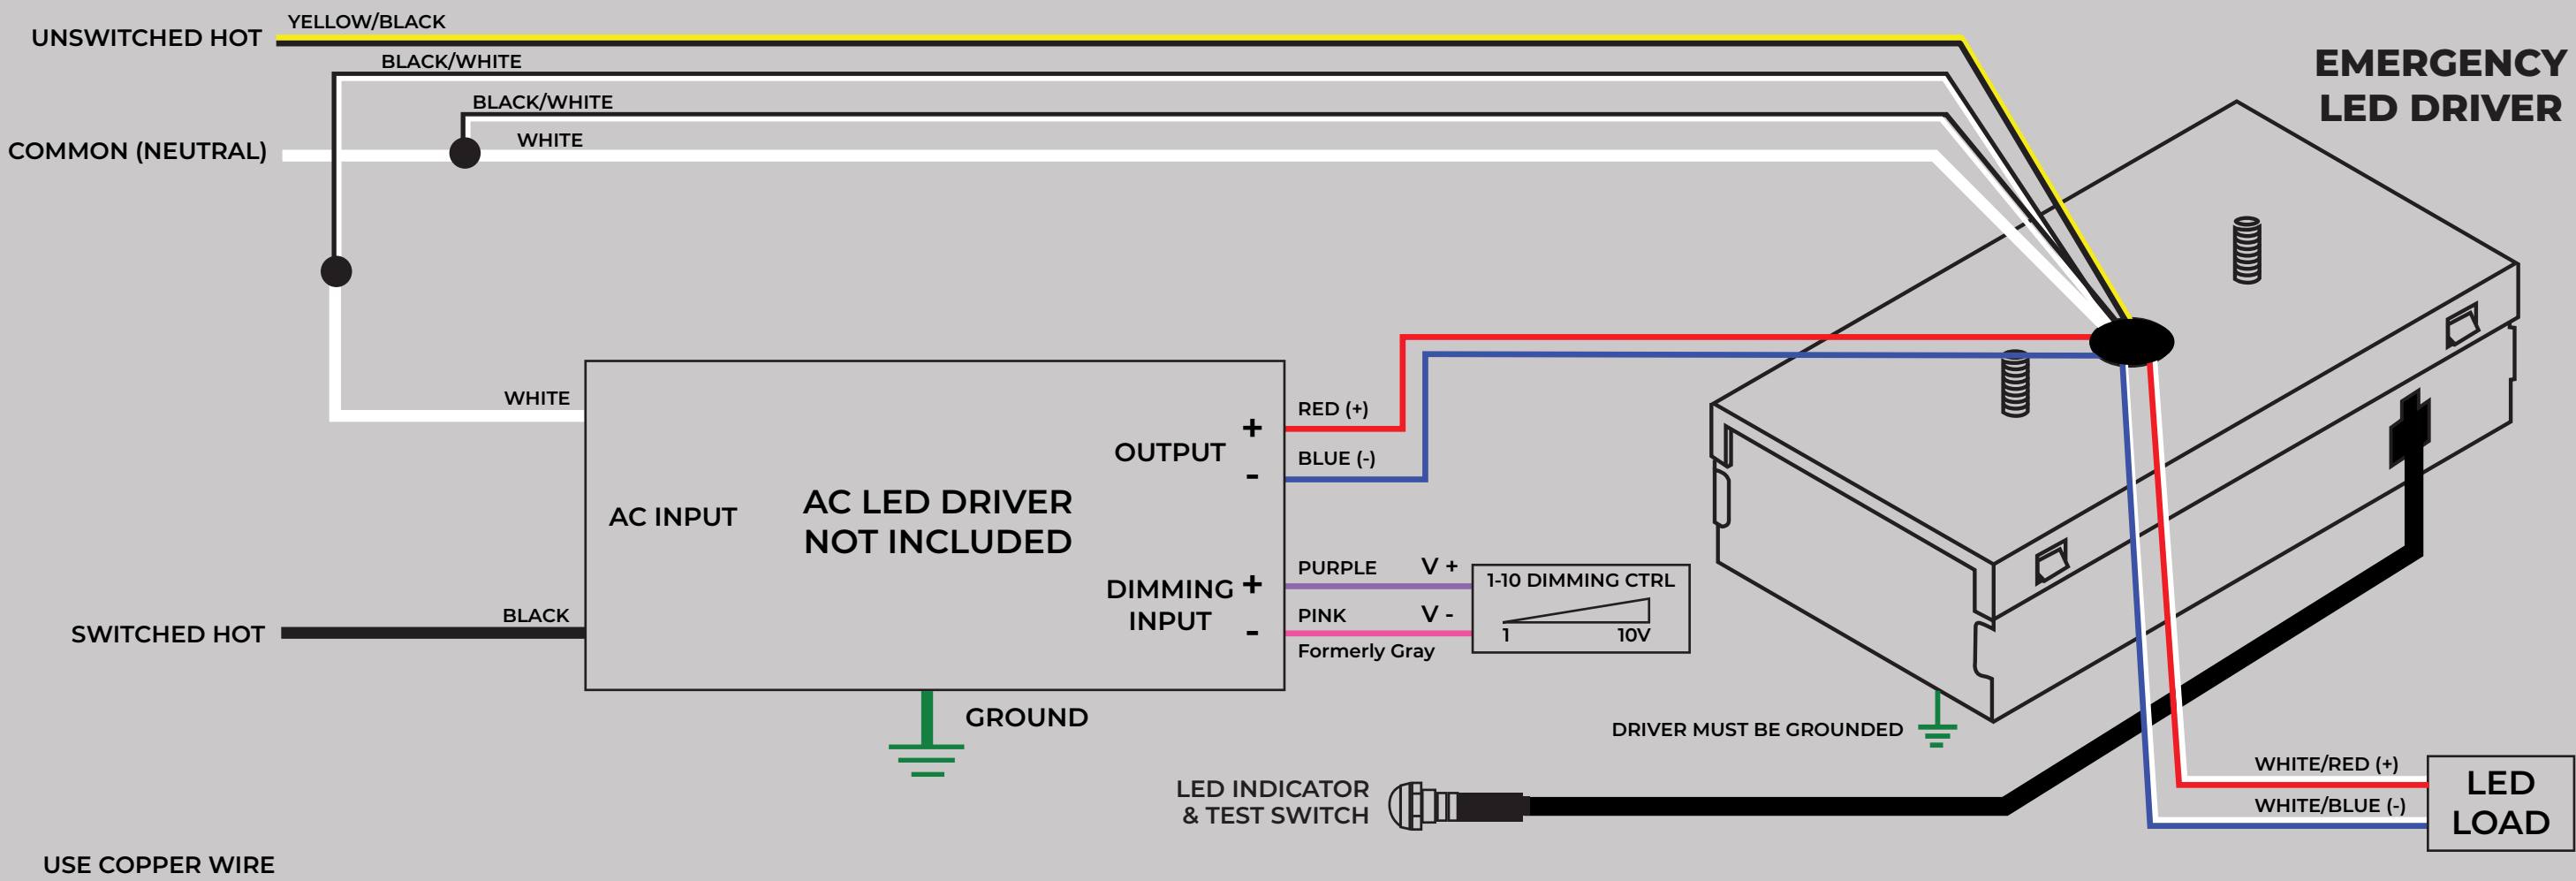


DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPC61555BSPCP
EMERGENCY LED DRIVER

CSA C22.2 No. 141
Emergency Lighting Equipment
Approved (Discharge de secours)
Made in Taiwan - AMTHHO

• Input Voltage: 120-277 V, 50/60 Hz
• Input Current (max): 30 mA
• Input Power: 8 W
• Output Voltage: 15-55 V
• Output Current: 100 mA - 400 mA
• Output Power: 6 W
• Battery Voltage: 6 V
• Battery Charge Current: 185 mA

• Battery Charge Time (max): 24 hrs
• Operating Duration (max): 30 min
• Ambient Temperature: 0-55 °C
• Output Class: 2 Conduction
• Suitable for damp locations
• For factory or field installation
• For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only.
De-energize before opening. Sealed unit. BATTERY not replaceable.
Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

POWER

TAAT

ACE LEDS
800-375-6355

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

USAR CABLE DE COBRE

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

USAR CABLE DE COBRE

 **ACE LEDS**
WE BRING THE POWER

aceleds.com | 800-375-6355

©2024 2Dec2024 / DC