



ENGLISH WIRING DIAGRAM


ACEPHI01555CPWP EMERGENCY LED DRIVER • Input Voltage: 120-277 V, 50/60 Hz • Output Current (mA): 110 mA • Input Power: 5 W • Output Voltage: 15-55 V • Output Current: 180 mA - 670 mA • Output Power: 10 W • Battery Voltage: 6.4 V • Battery Charge Current: 185 mA		• Battery Charge Time (max): 24 Hours • Operating Duration (min): 90 Minutes • Ambient Temperature: 0°C ~ 55 °C • Output Class 2 Compliant • Suitable for damp locations • For factory or field installation • For metal enclosed wiring system		CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit, BATTERY not replaceable. Replace entire unit when necessary.				 CEA C22.9 No. 191 Emergency Lighting Equipment Appareil d'éclairage de secours Made in Taiwan / AM251							
USE COPPER WIRE		POWER										ACE LEDs		800-375-6355	

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

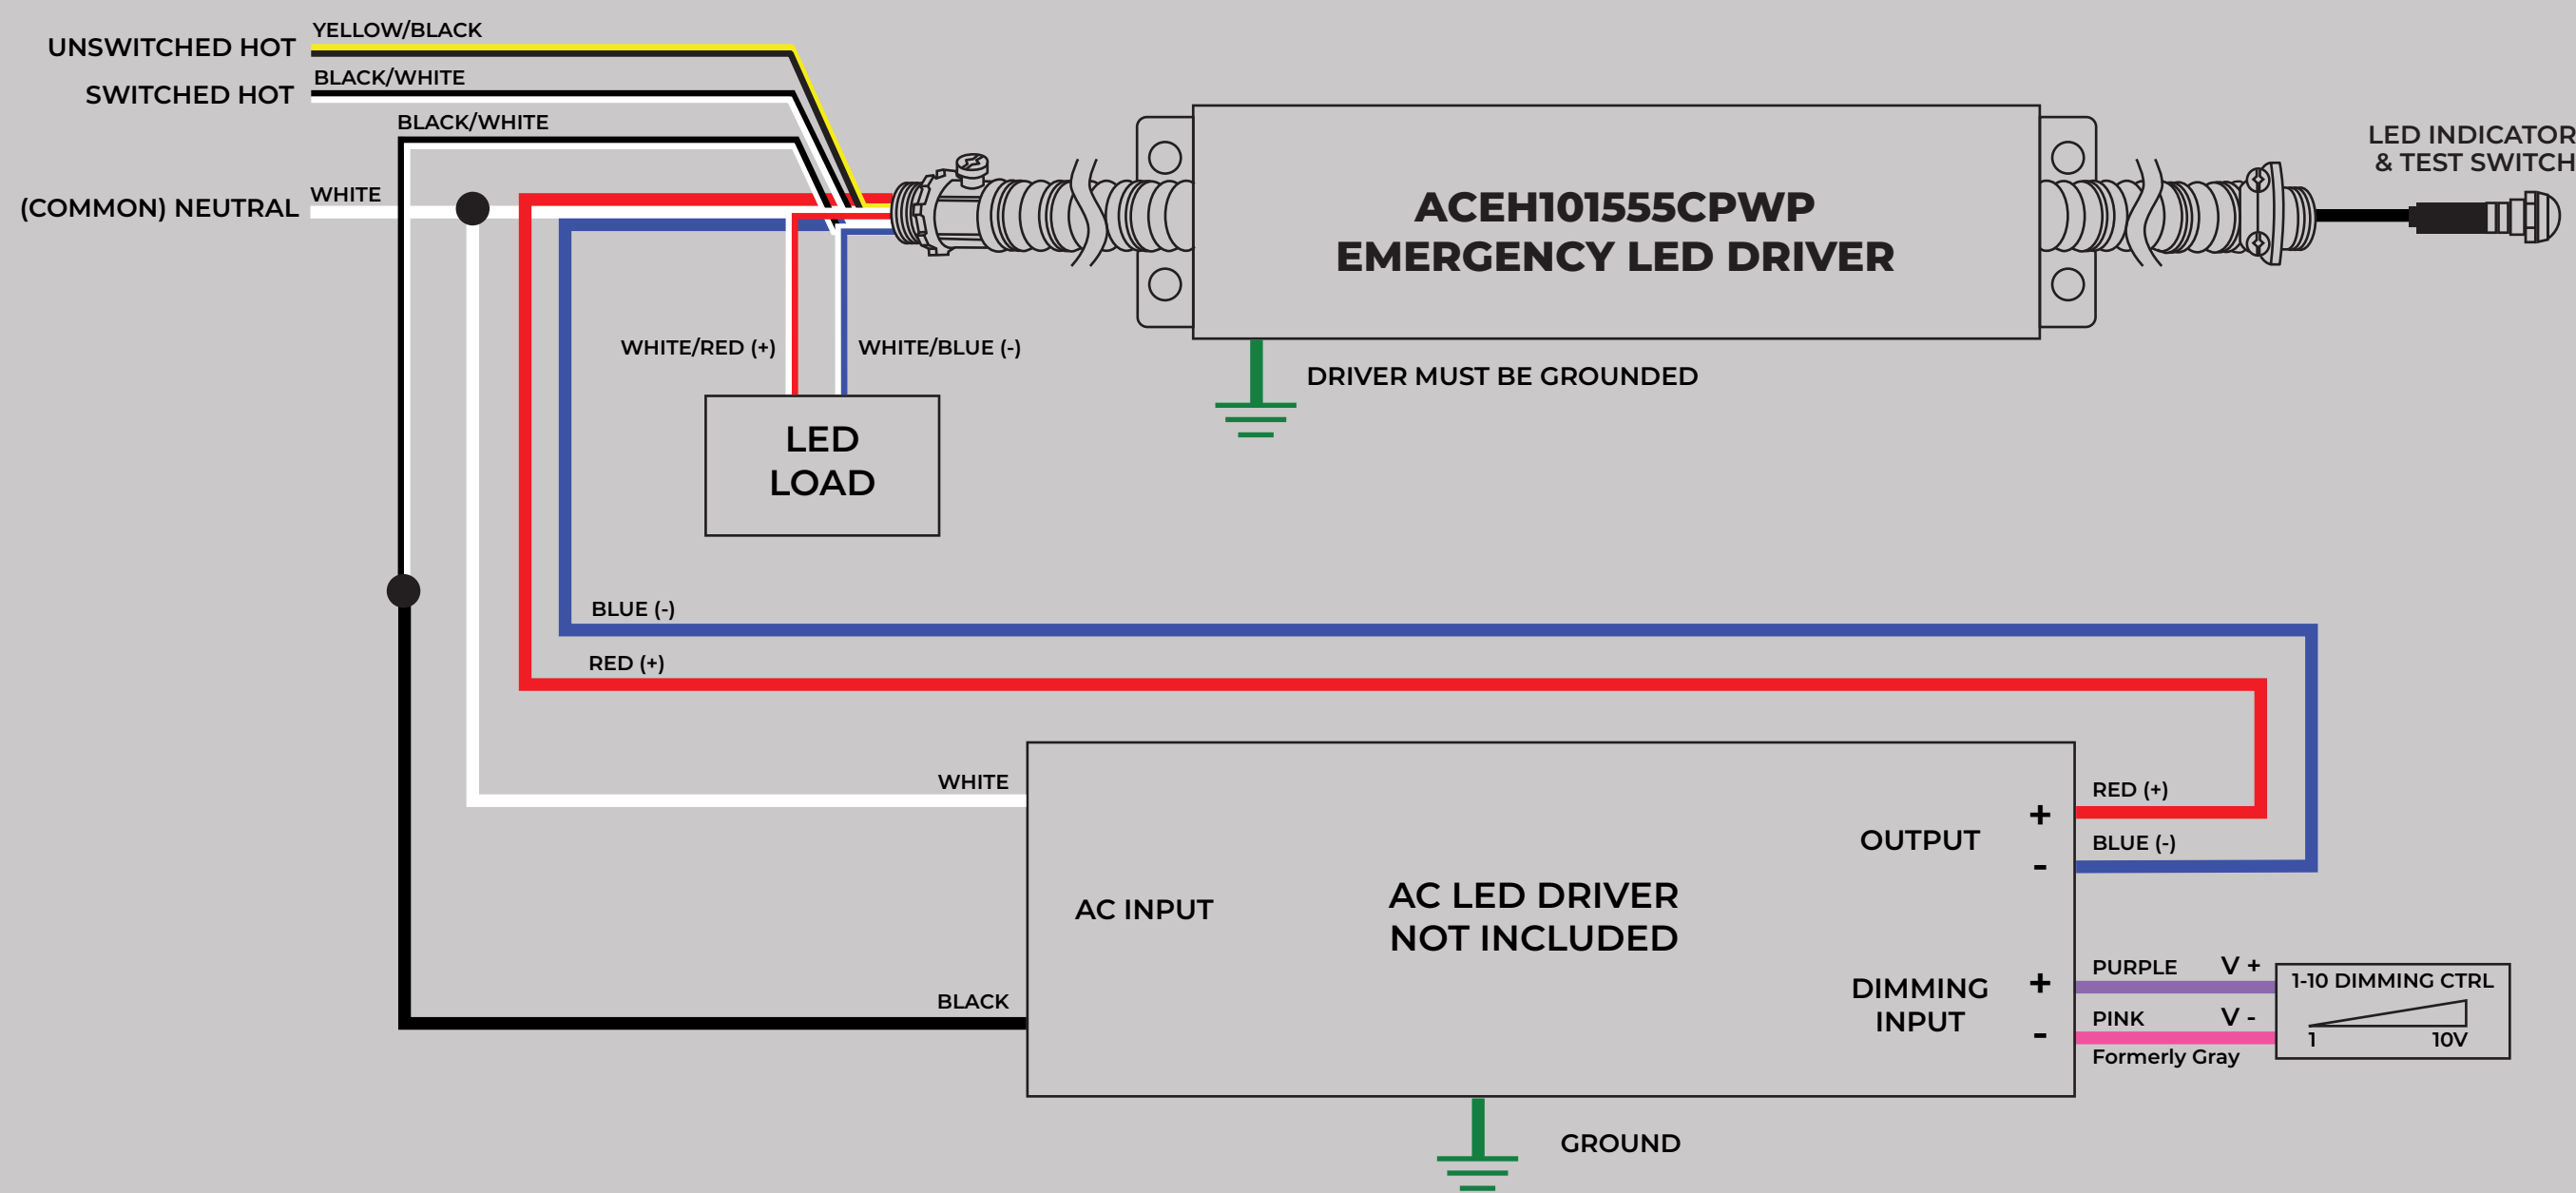

USE COPPER WIRE

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

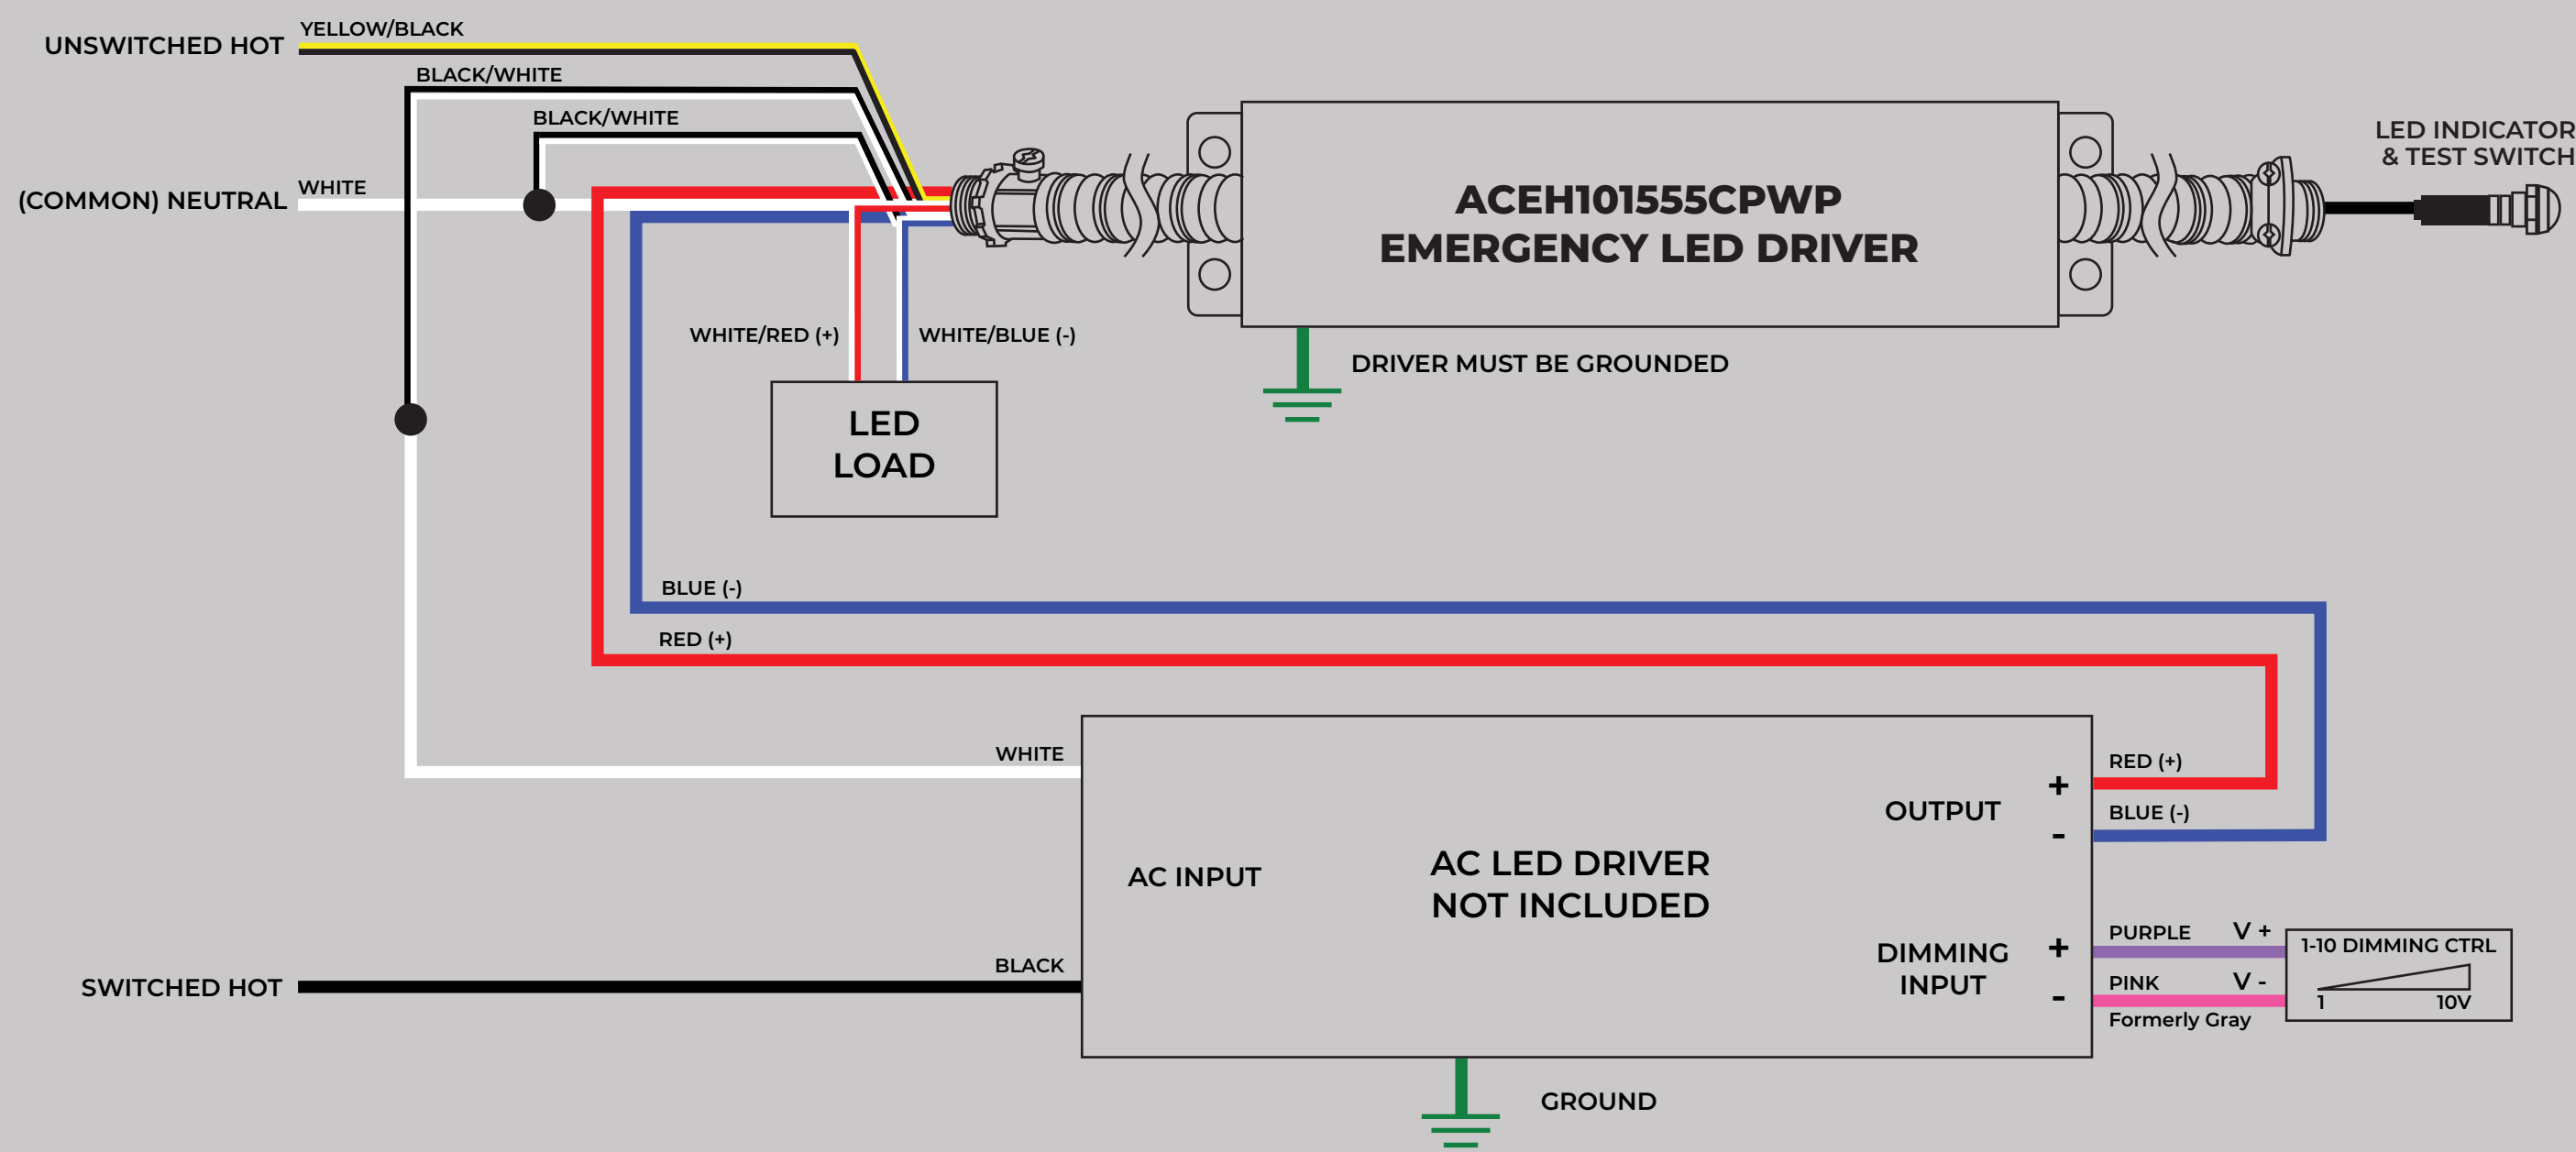

USE COPPER WIRE

DIAGRAMA DE CABLEADO EN ESPAÑOL

ACEPH101555CPWP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 15-55 V
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 6.4 V
- Battery Charge Current: 185 mA
- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0°C - 55°C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

POWER


BC TAA COMPLIANT

CSA C22.2 No. 141, Emergency Lighting Equipment Appareil d'éclairage de secours Made in Taiwan - AM251

ACE LEDS

800-375-6355

A. DIAGRAMA DE CABLEADO TÍPICO PARA CONMUTAR LA ENERGÍA AC CALIENTE CONMUTADA PARA EL CONTROLADOR LED AC NORMAL

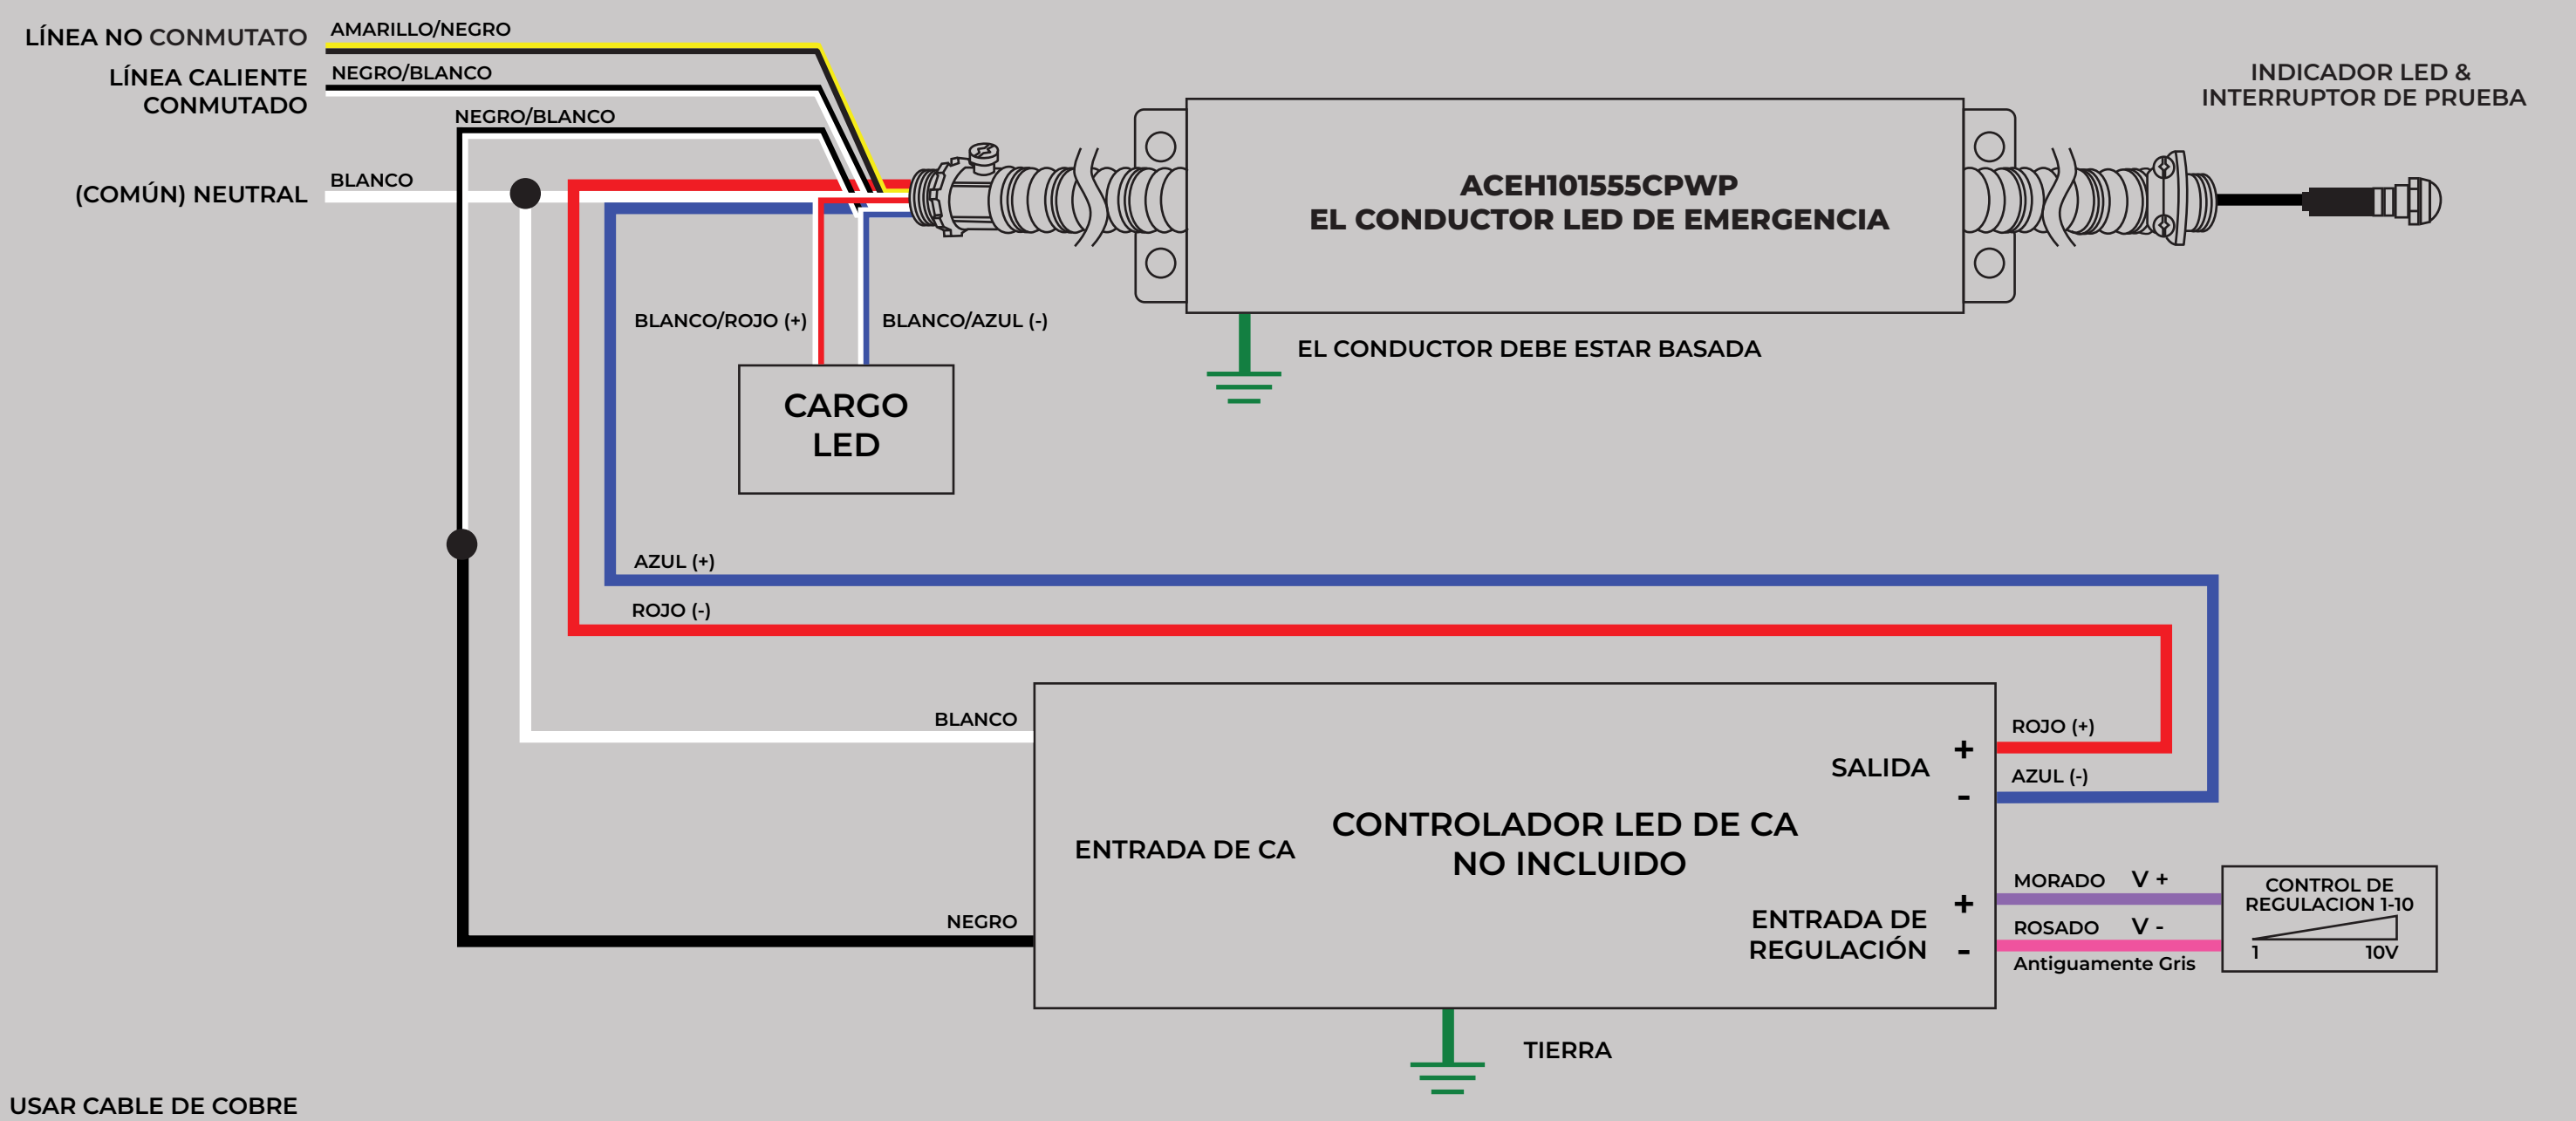

B. DIAGRAMA DE CABLEADO TÍPICO PARA CONMUTAR EL CABLE NEUTRO DEL CONDUCTOR LED CA NORMAL

