

ENGLISH WIRING DIAGRAM

ACEPH201555CP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 130 mA
- Input Power: 11 W
- Output Voltage: 15-55 V
- Output Current: 360 mA - 1350 mA
- Output Power: 20 W
- Battery Voltage: 9.6 V
- Battery Charge Current: 450 mA
- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

Made in Taiwan - AMIBS

POWER

BC TAAI COMPLIANT

UL LISTED


CSA C22.2 No. 141, Emergency Lighting Equipment

Appareil d'éclairage de secours

ACE LEDS


800-375-6355

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

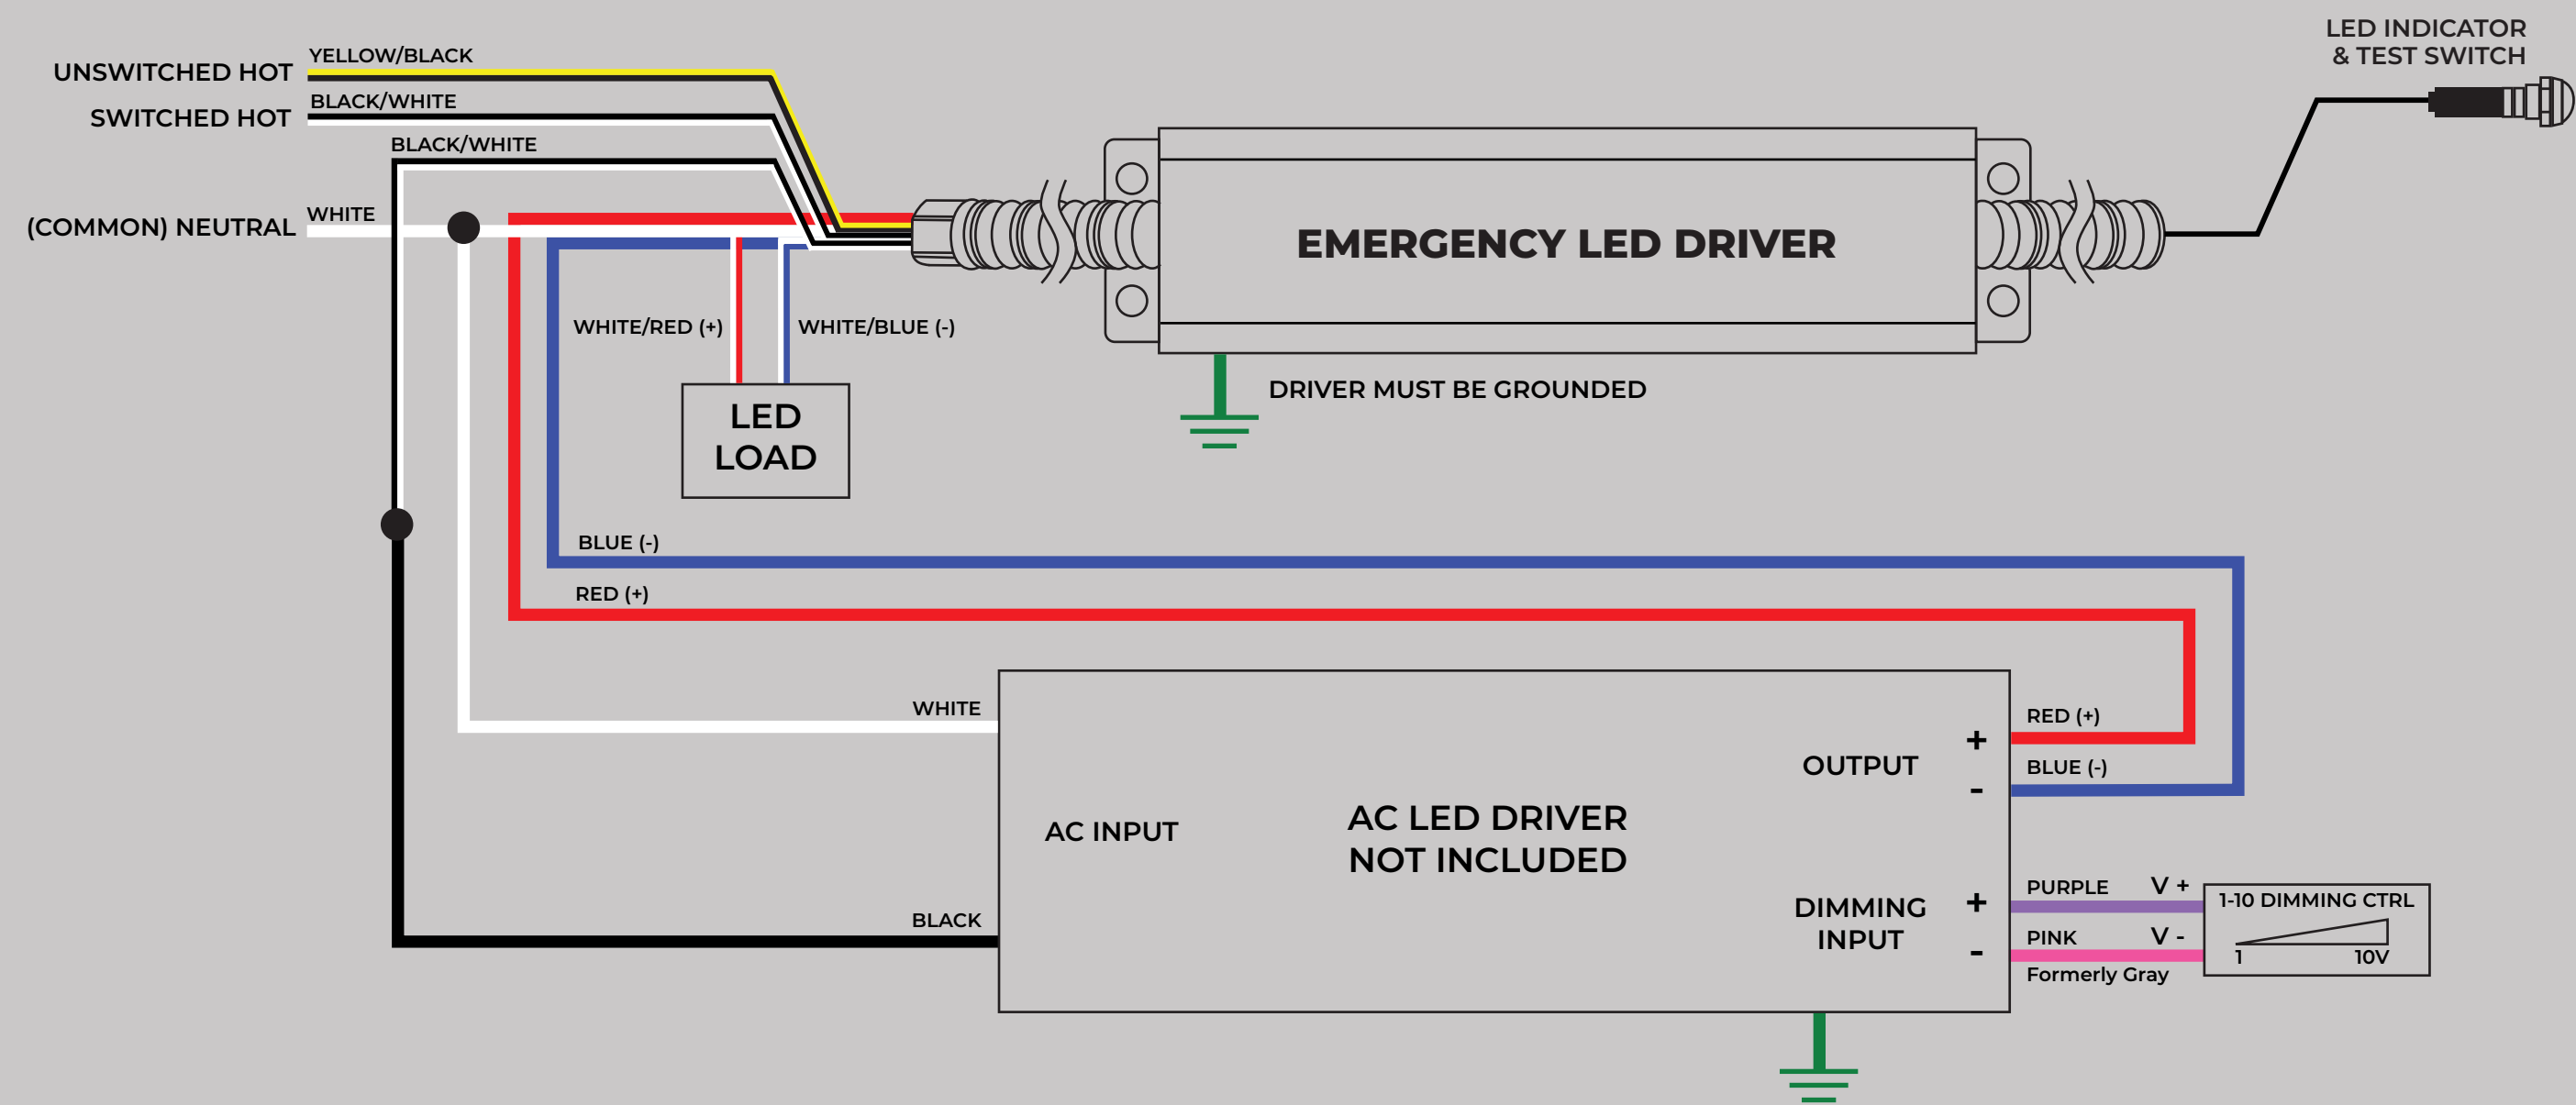

USE COPPER WIRE

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

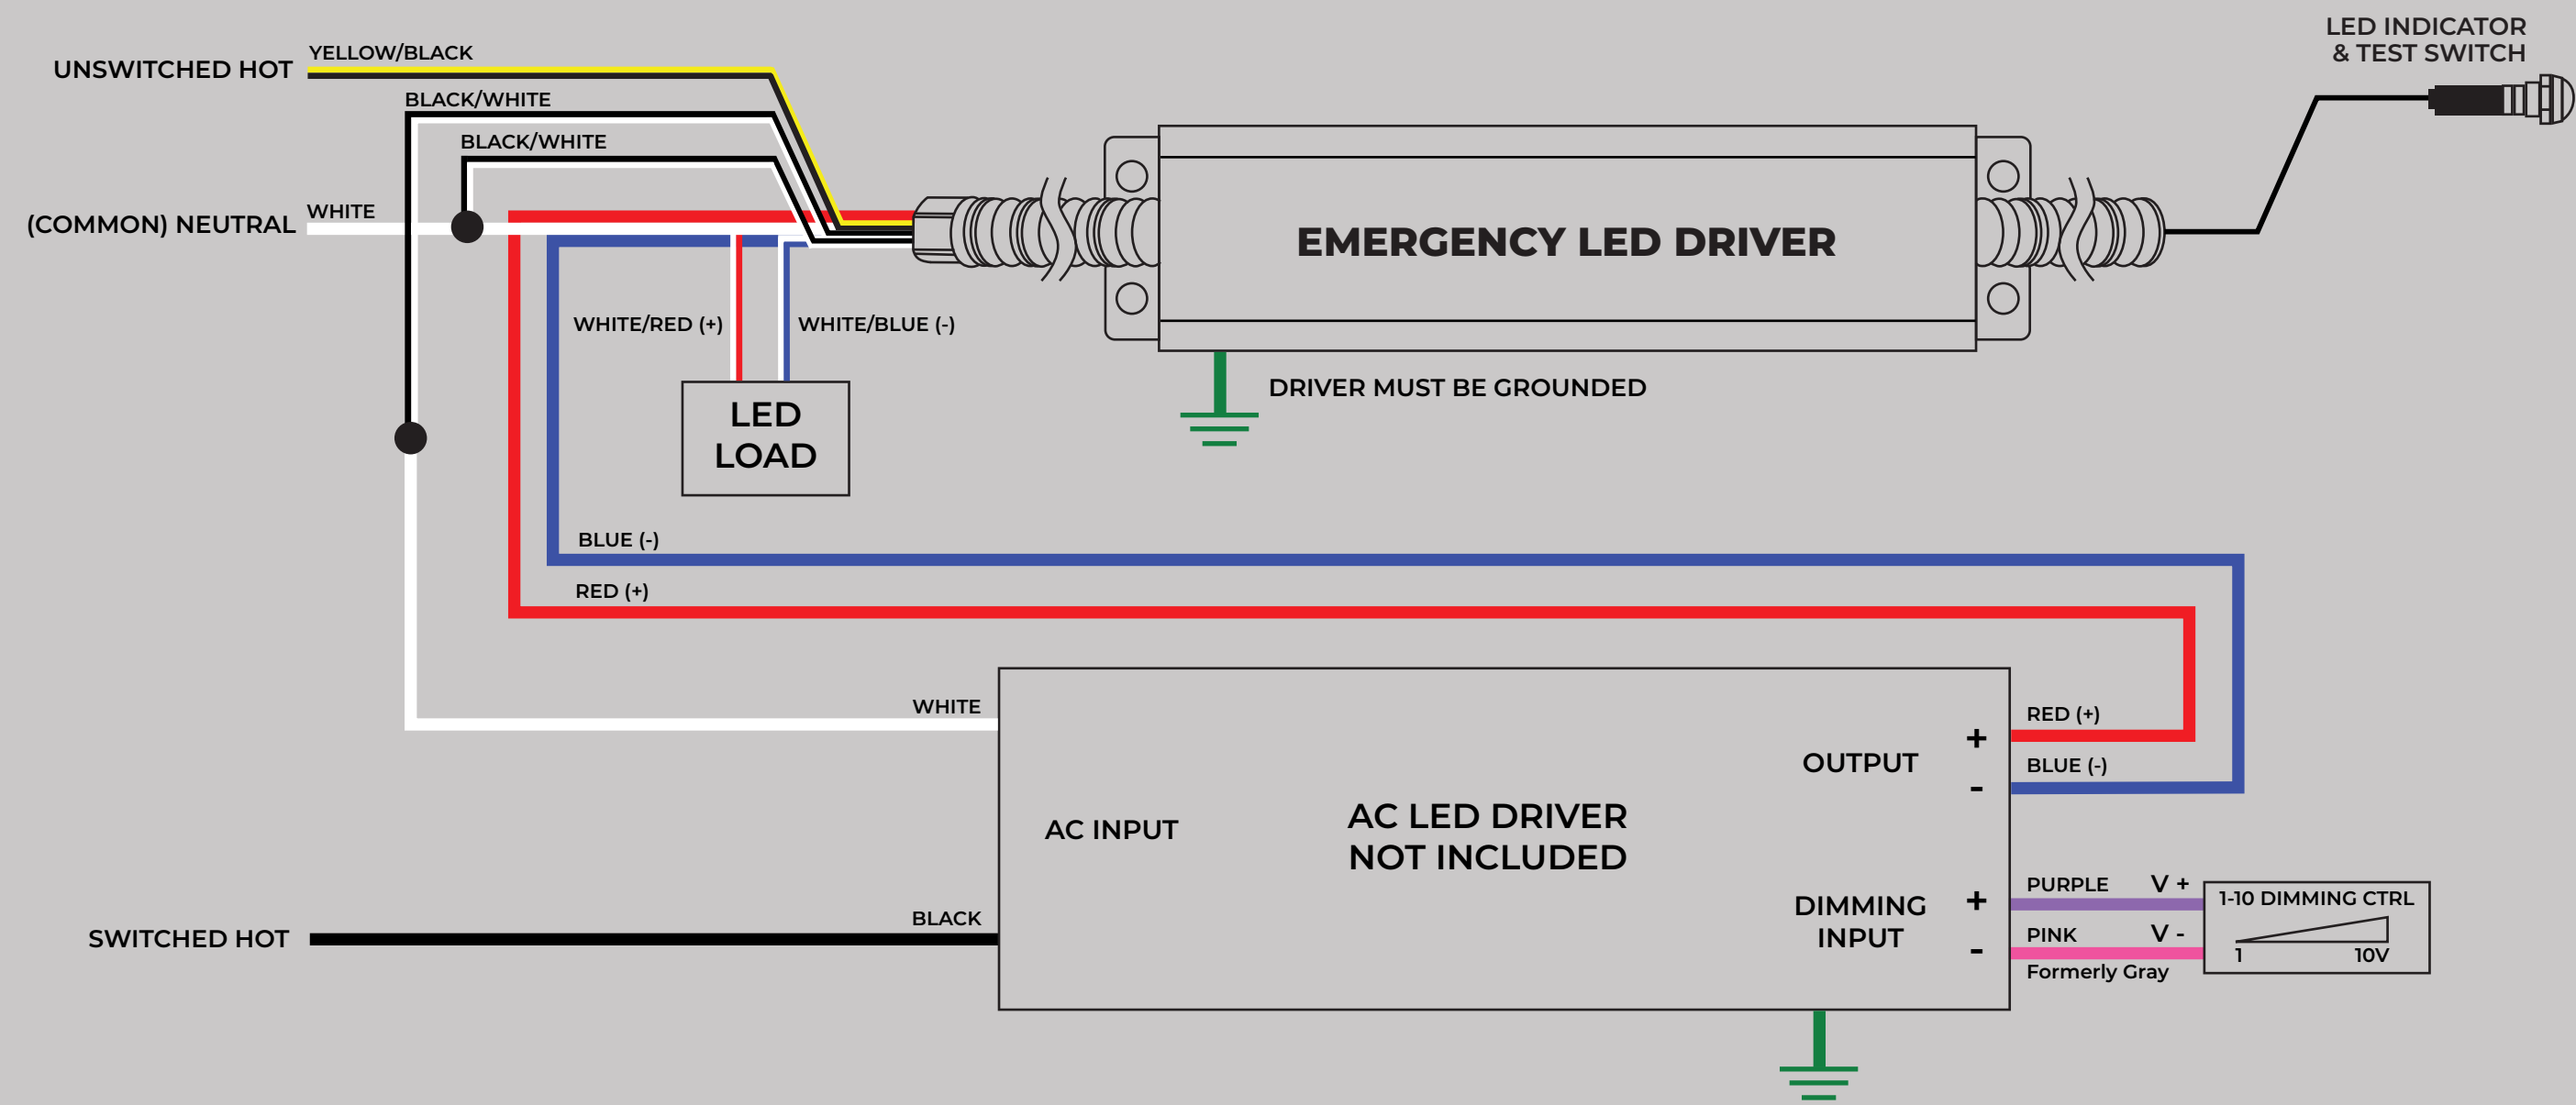

USE COPPER WIRE

DIAGRAMA DE CABLEADO EN ESPAÑOL

ACEPH201555CP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 130 mA
- Input Power: 11 W
- Output Voltage: 15-55 V
- Output Current: 360 mA - 1350 mA
- Output Power: 20 W
- Battery Voltage: 9.6 V
- Battery Charge Current: 450 mA

- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

Made in Taiwan - AM185

POWER

BC

TAA

UL

CE


RoHS

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours

ACE LEDS


800-375-6355

A. DIAGRAMA DE CABLEADO TÍPICO PARA CONMUTAR LA ENERGÍA AC CALIENTE CONMUTADA PARA EL CONTROLADOR LED AC NORMAL

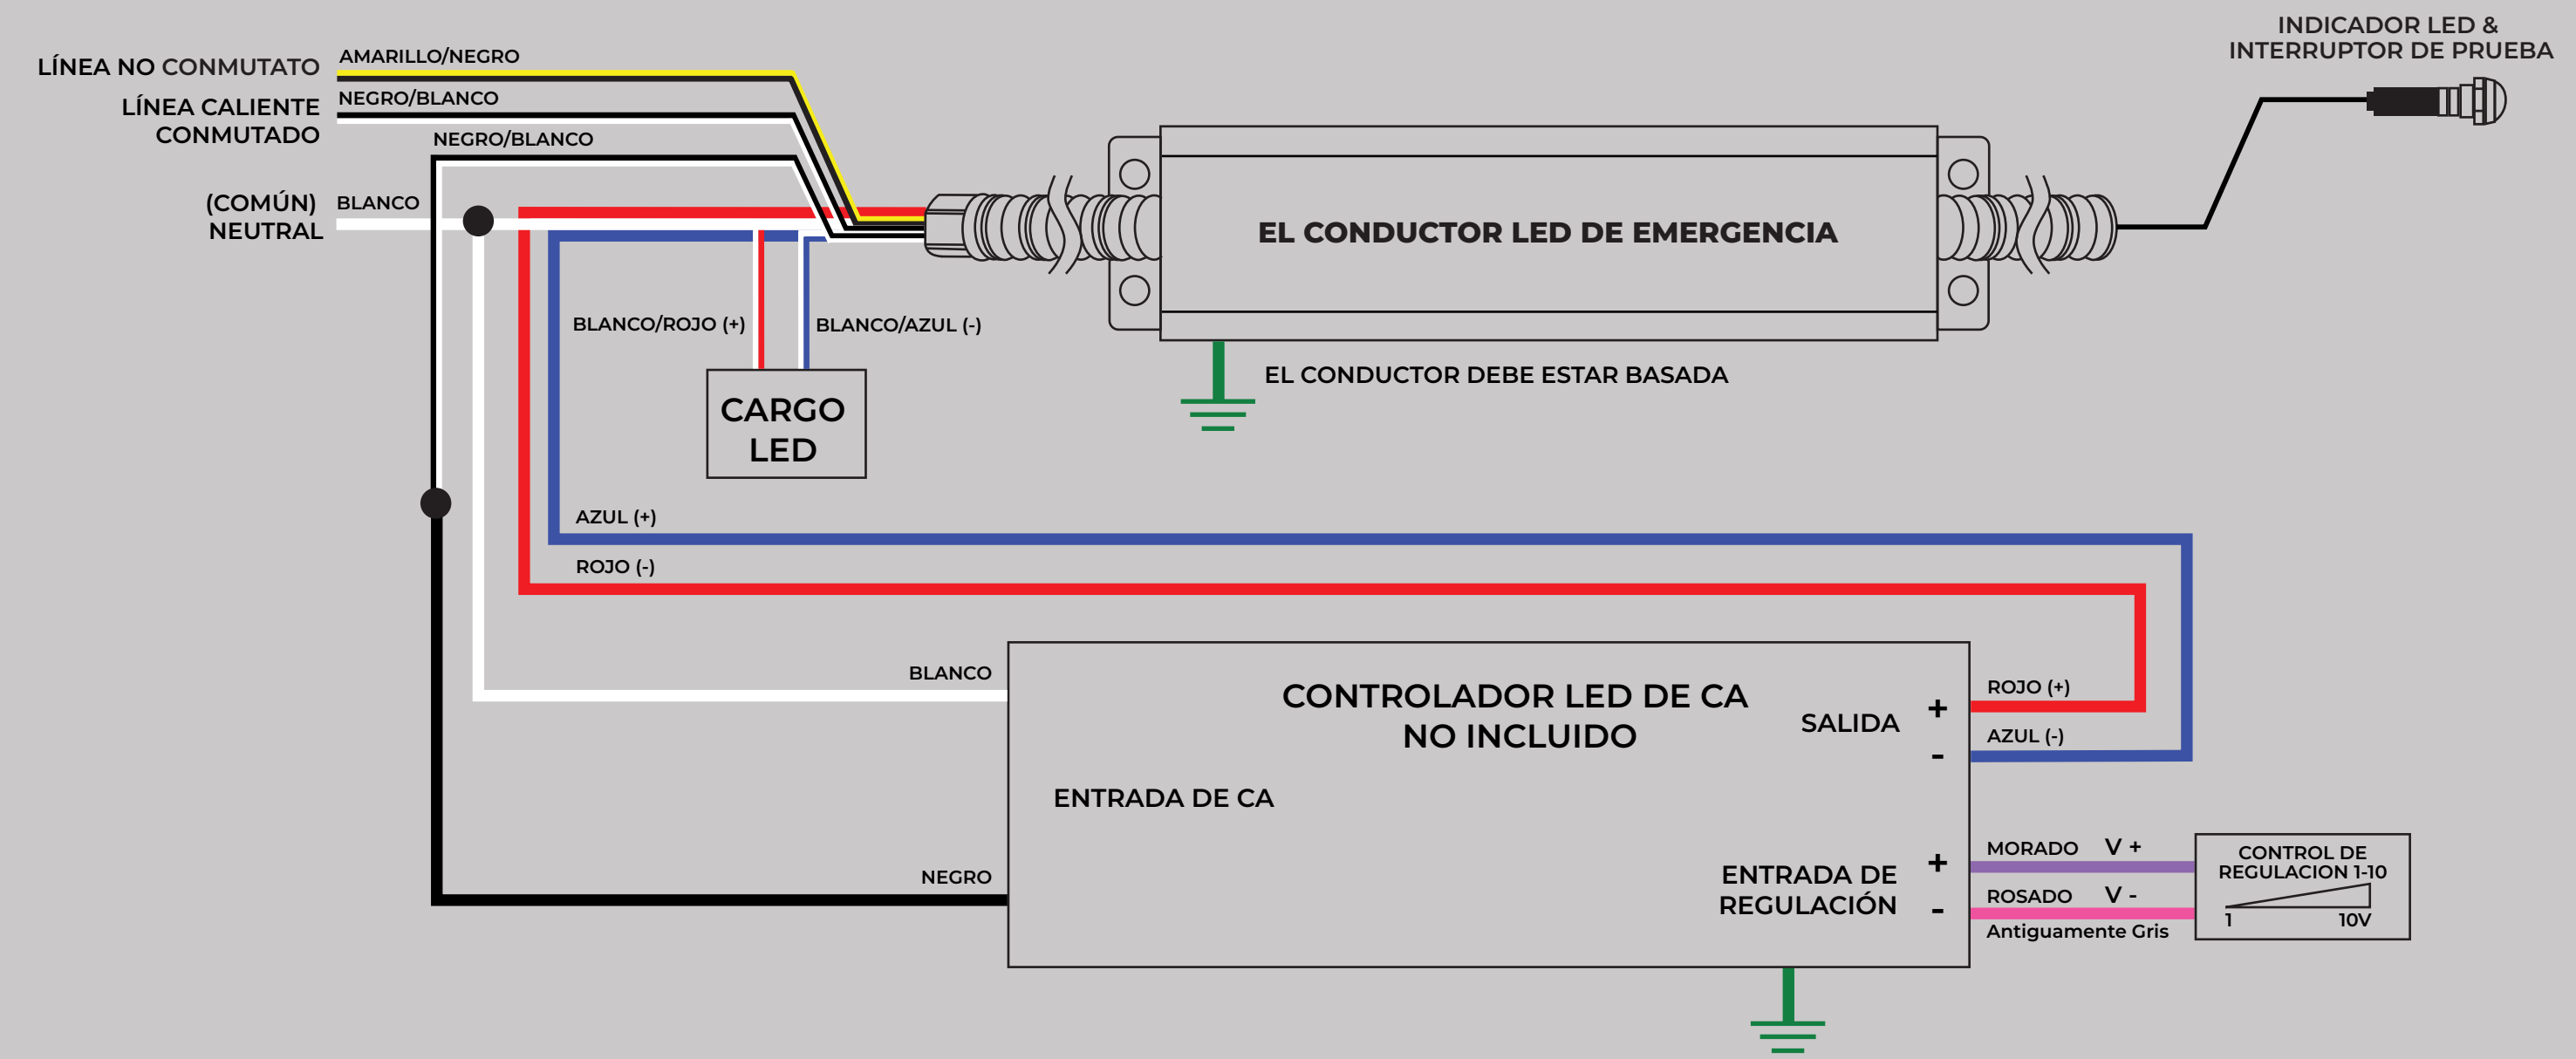

USAR CABLE DE COBRE

B. DIAGRAMA DE CABLEADO TÍPICO PARA CONMUTAR EL CABLE NEUTRO DEL CONDUCTOR LED CA NORMAL

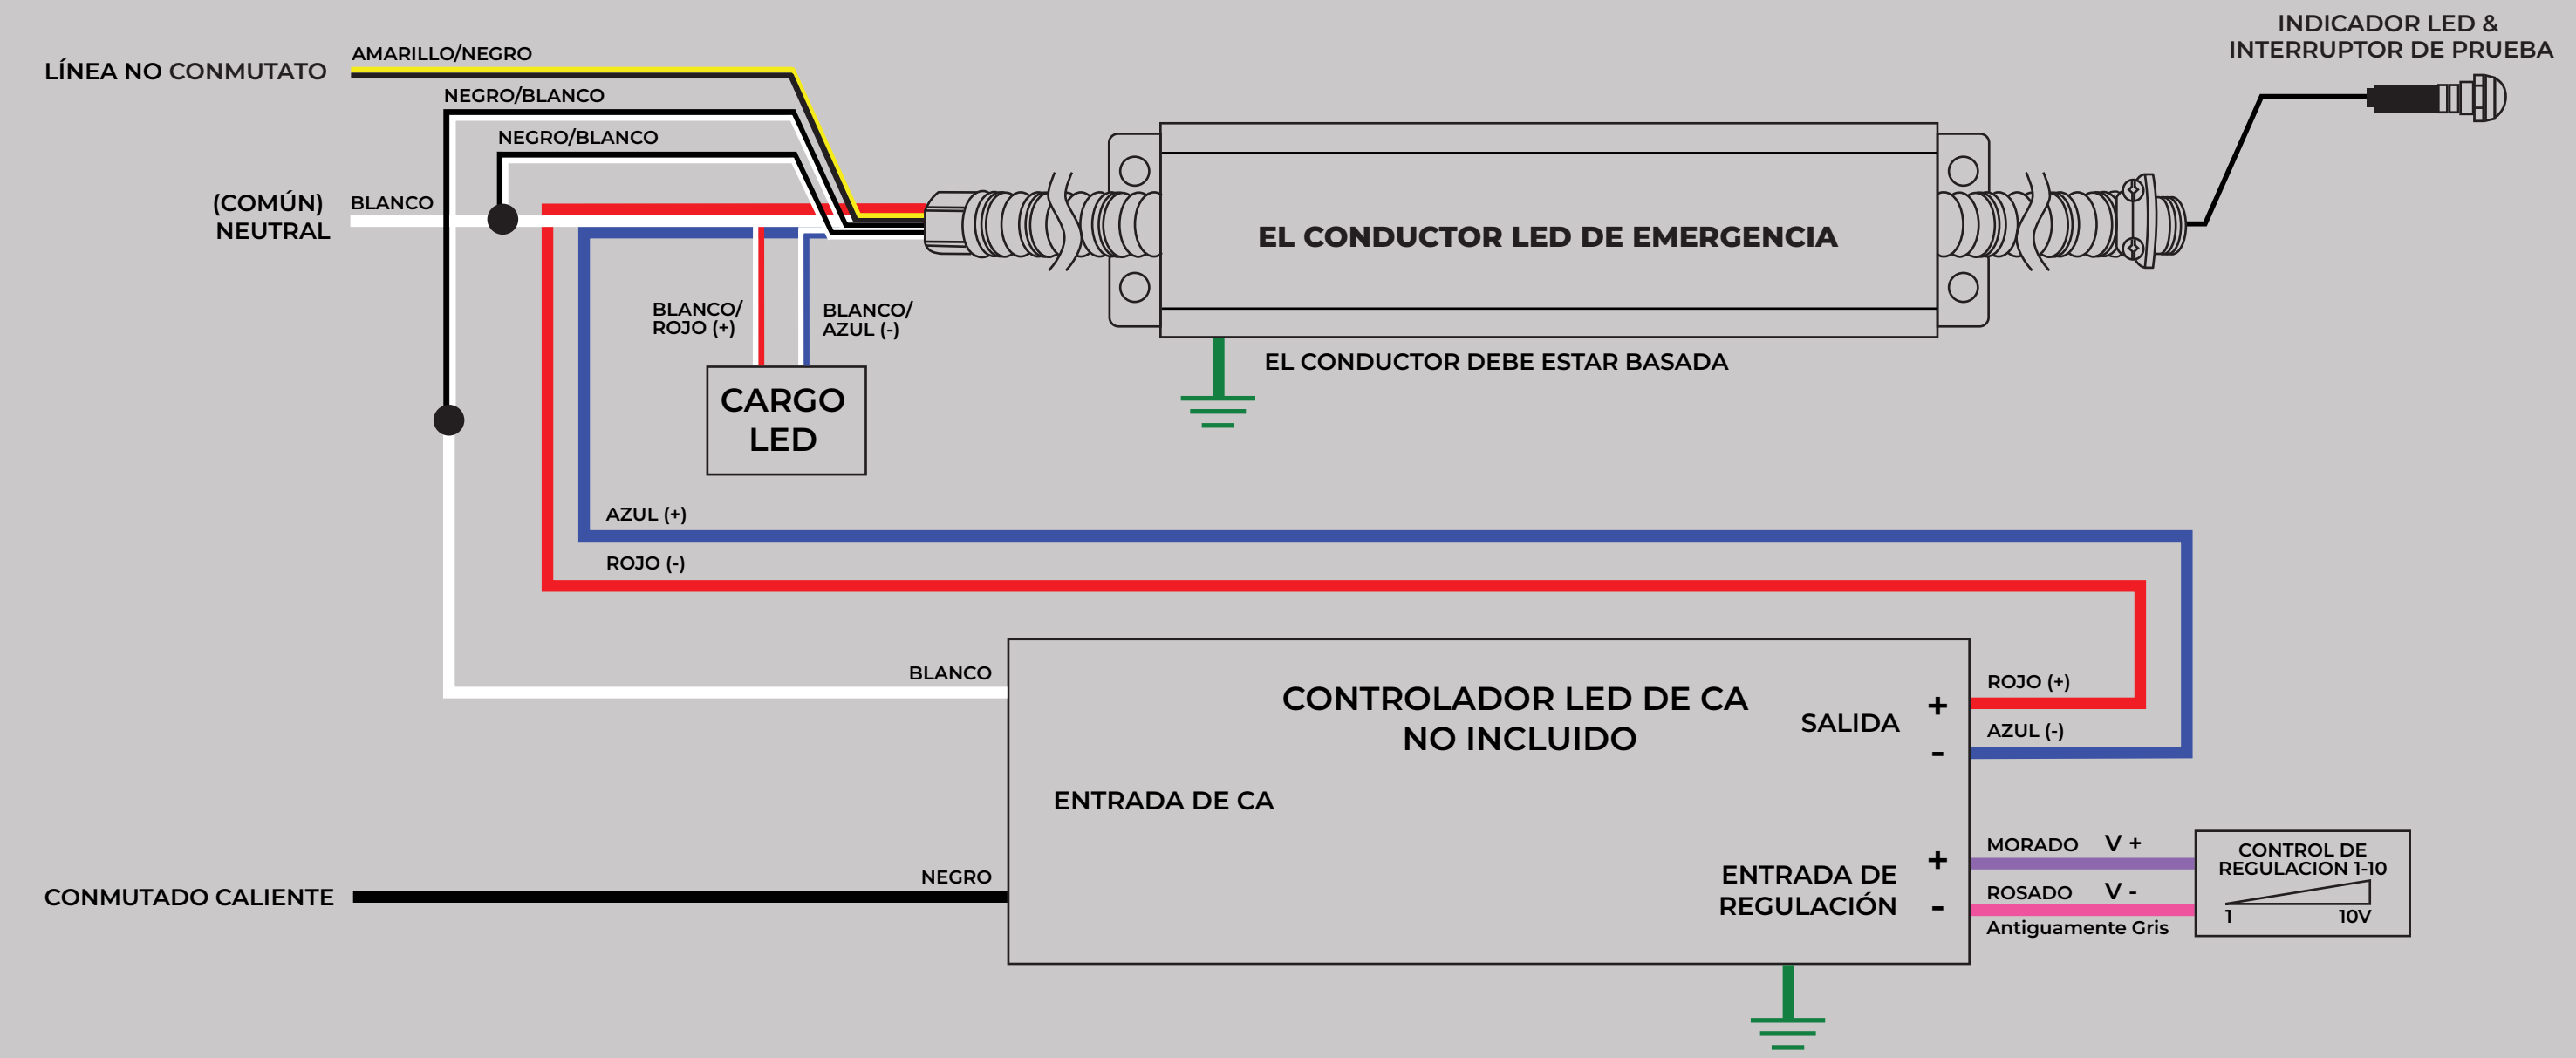

USAR CABLE DE COBRE