

ENGLISH WIRING DIAGRAM

ACEPG10L1555CPB EMERGENCY LED DRIVER

- Input Voltage: 120-347 V, 50/60 Hz
- Input Current (max): 150 mA
- Input Power: 11 W
- Output Voltage: 15-33 V
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 10.8 V
- Battery Charge Current: 185 mA
- Battery Charge Time (min): 24 Hours
- Operating Duration (min): 30 Minutes
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

POWER

UL LISTED
UL 916
POWER
CLASS 2
LIMITED
TAA
COMPLIANT


CSA C22.2 No. 141
Emergency Lighting Equipment
Appareil d'éclairage de secours

Made in Taiwan - AM259

USE COPPER WIRE

ACE LEDS
800-375-6355

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

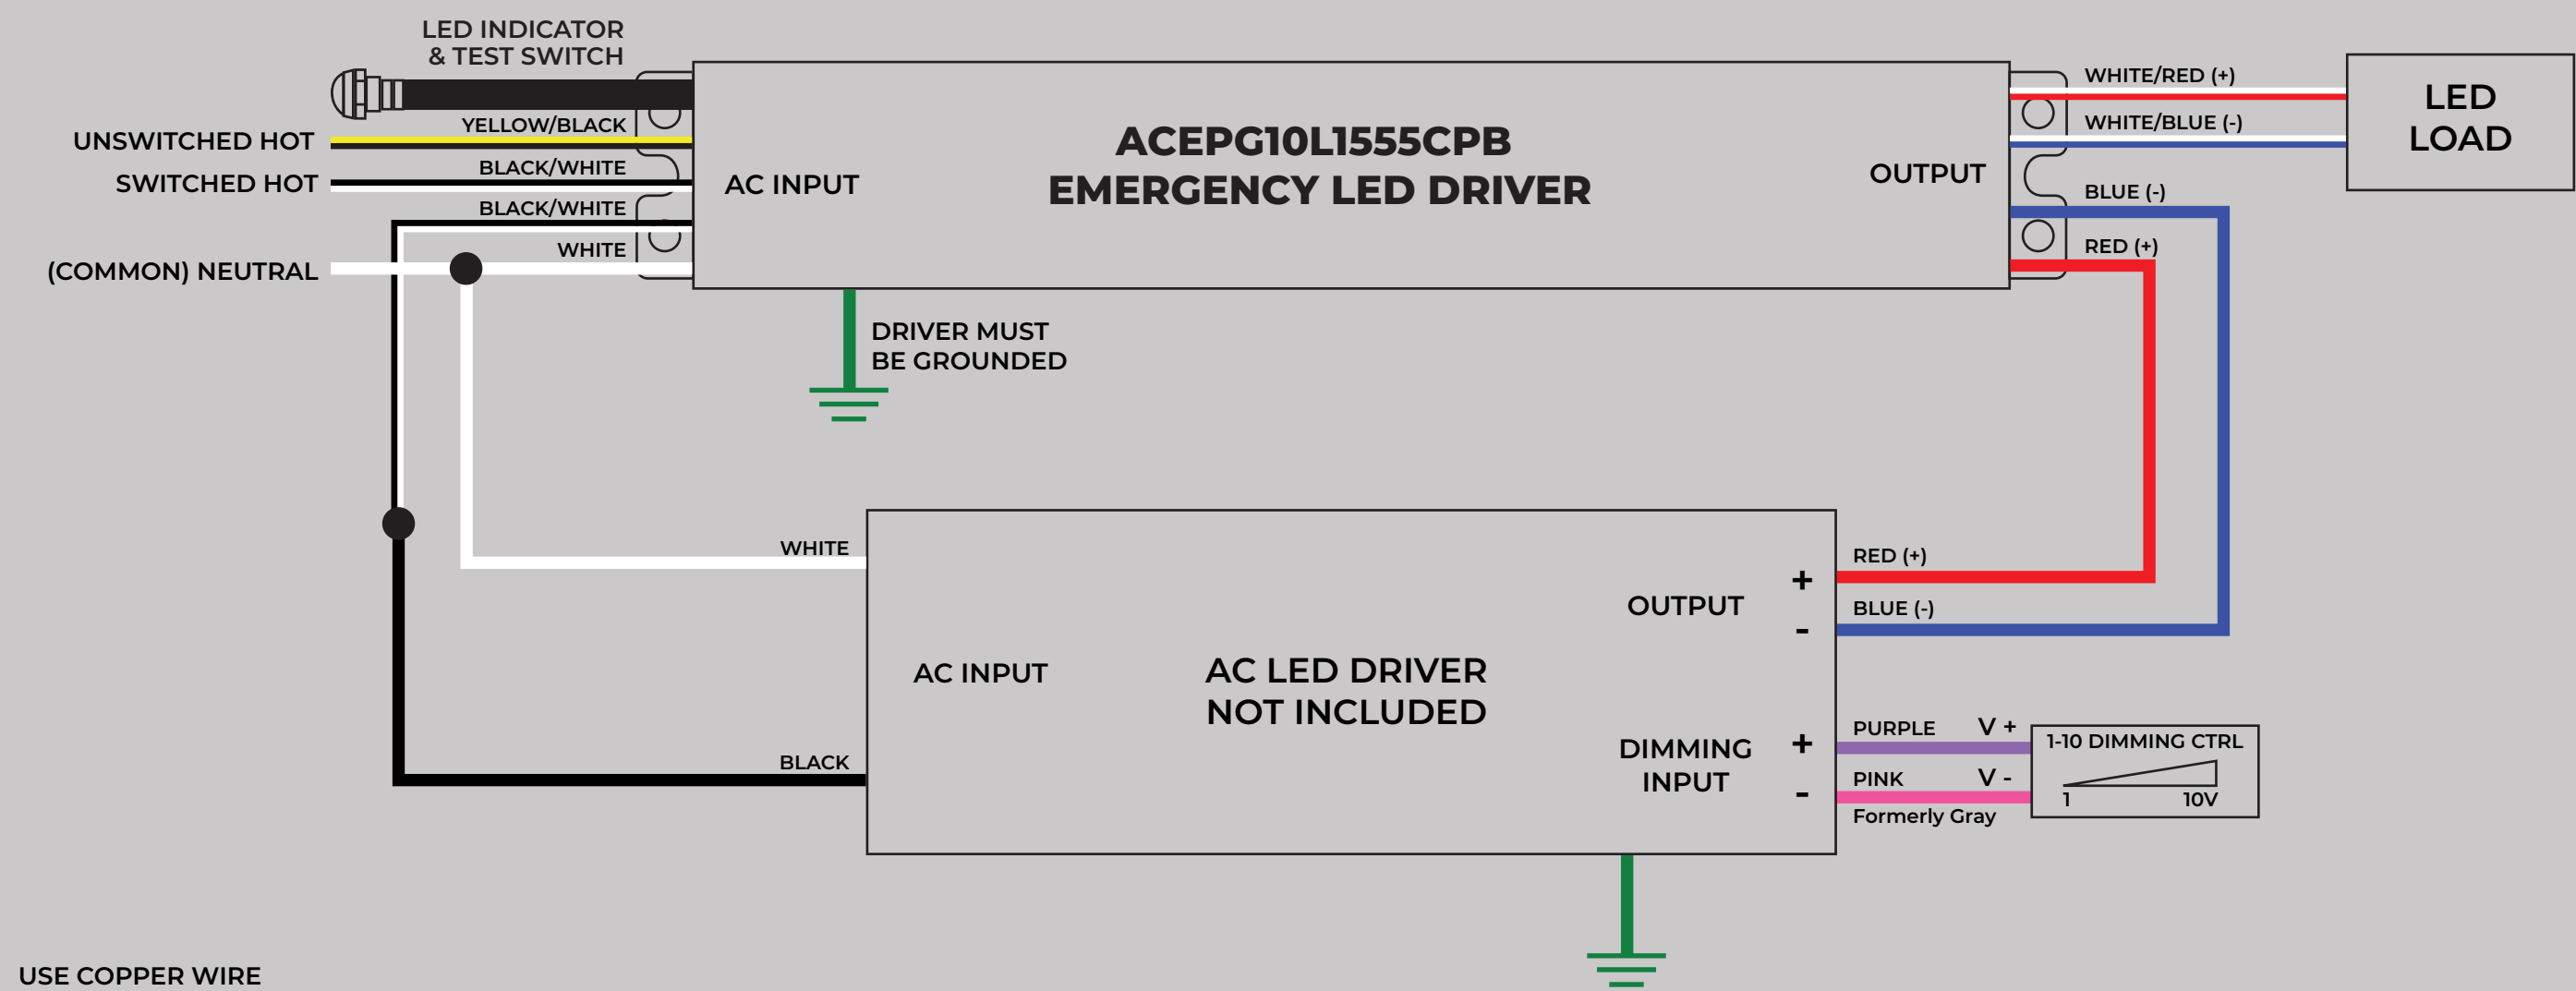

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

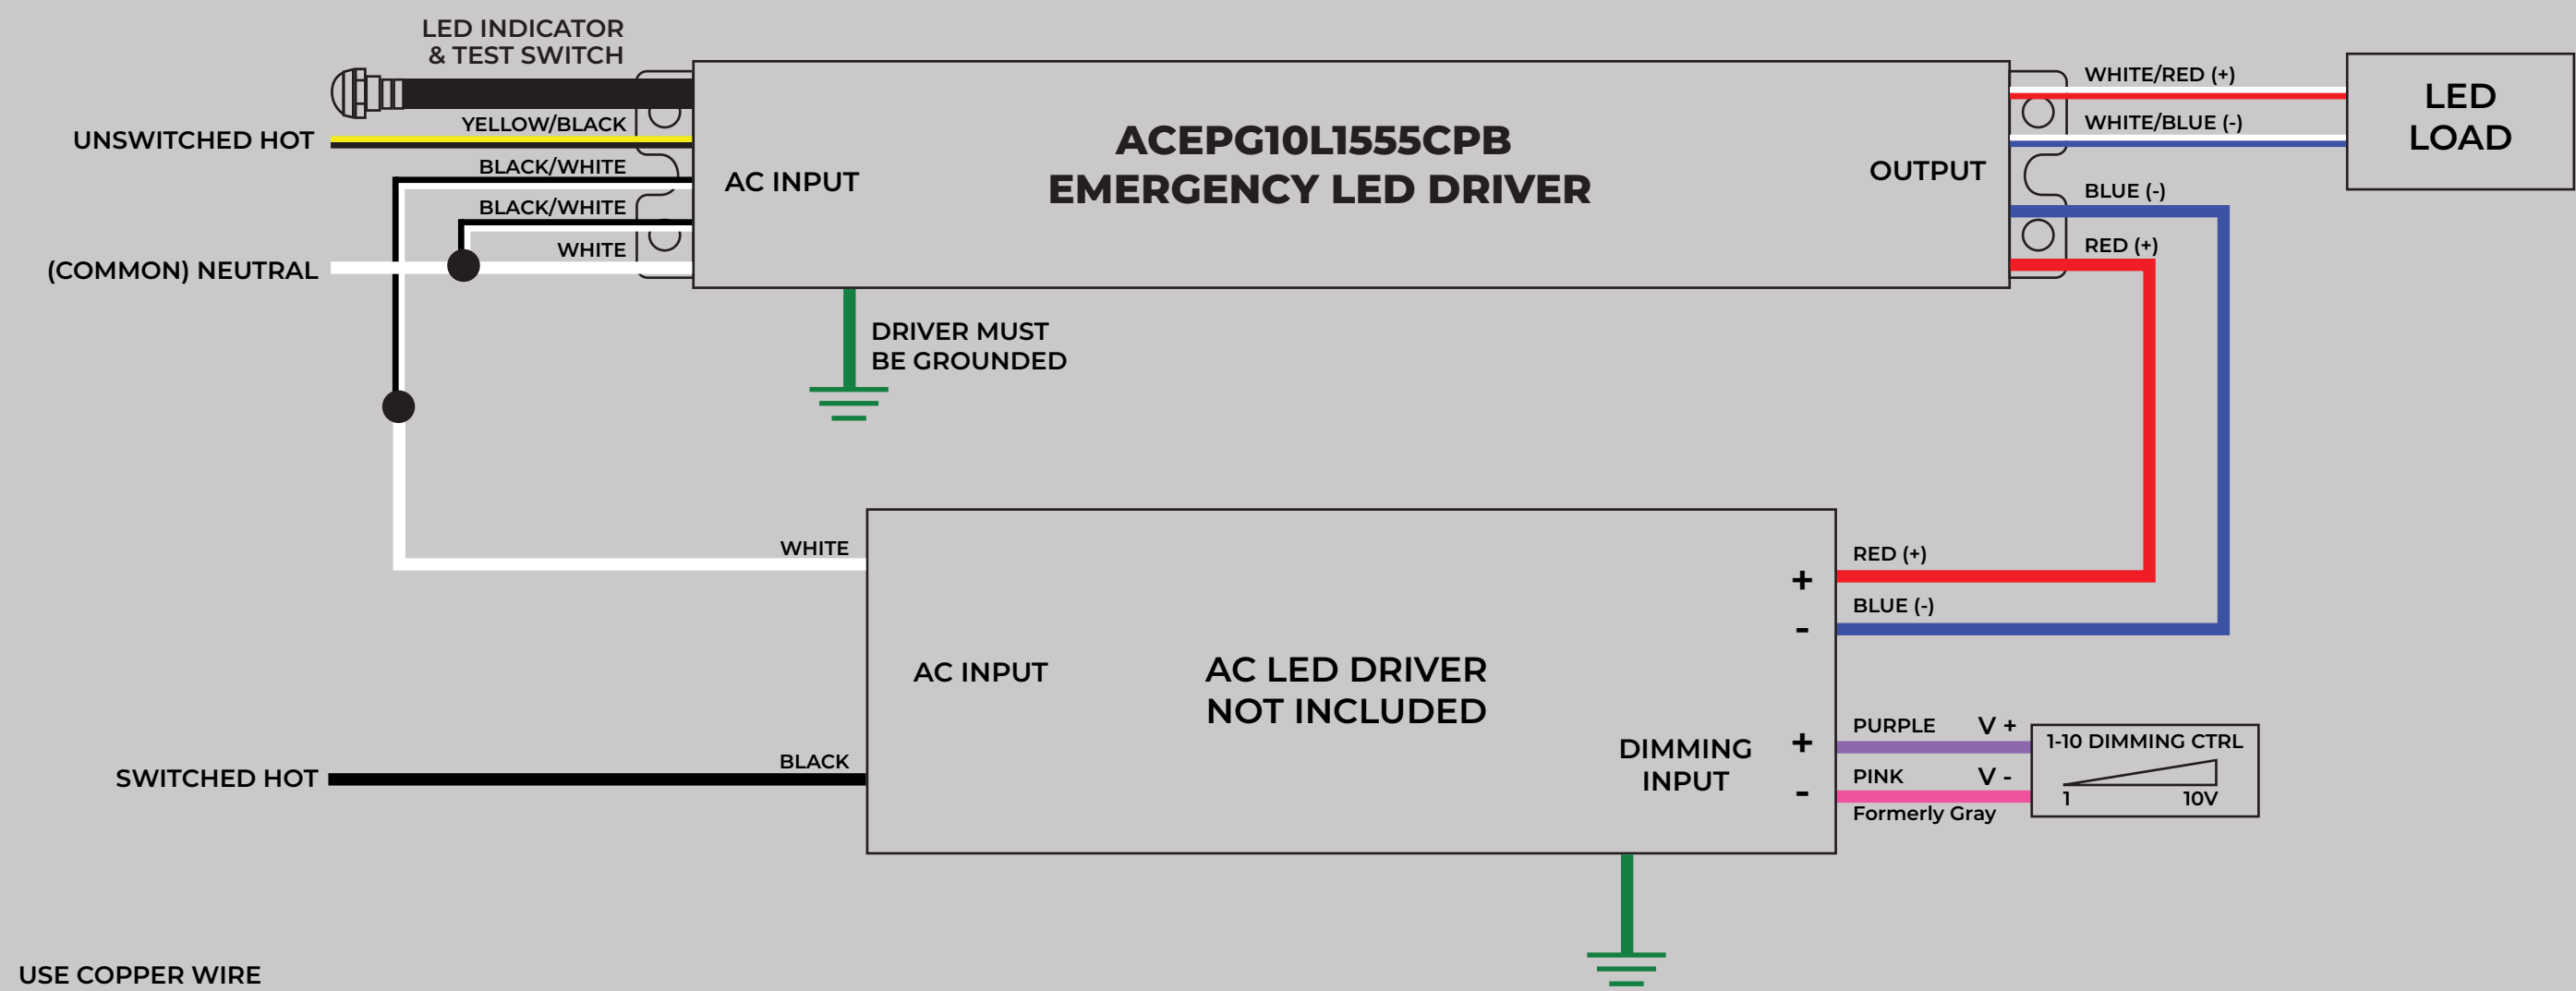


DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPG10L1555CPB EMERGENCY LED DRIVER

- Input Voltage: 120-247 V, 50/60 Hz
- Input Current (max): 130 mA
- Input Power: 11 W
- Output Voltage: 15-55 V
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 10.8 V
- Battery Charge Current: 185 mA
- Battery Charge Time (min): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit, BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

POWER

UL LISTED
ETL
TAA
CE
RoHS
RECYCLED


CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours

Made in Taiwan - AM259

USE COPPER WIRE

ACE LEDS
800-375-6355

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

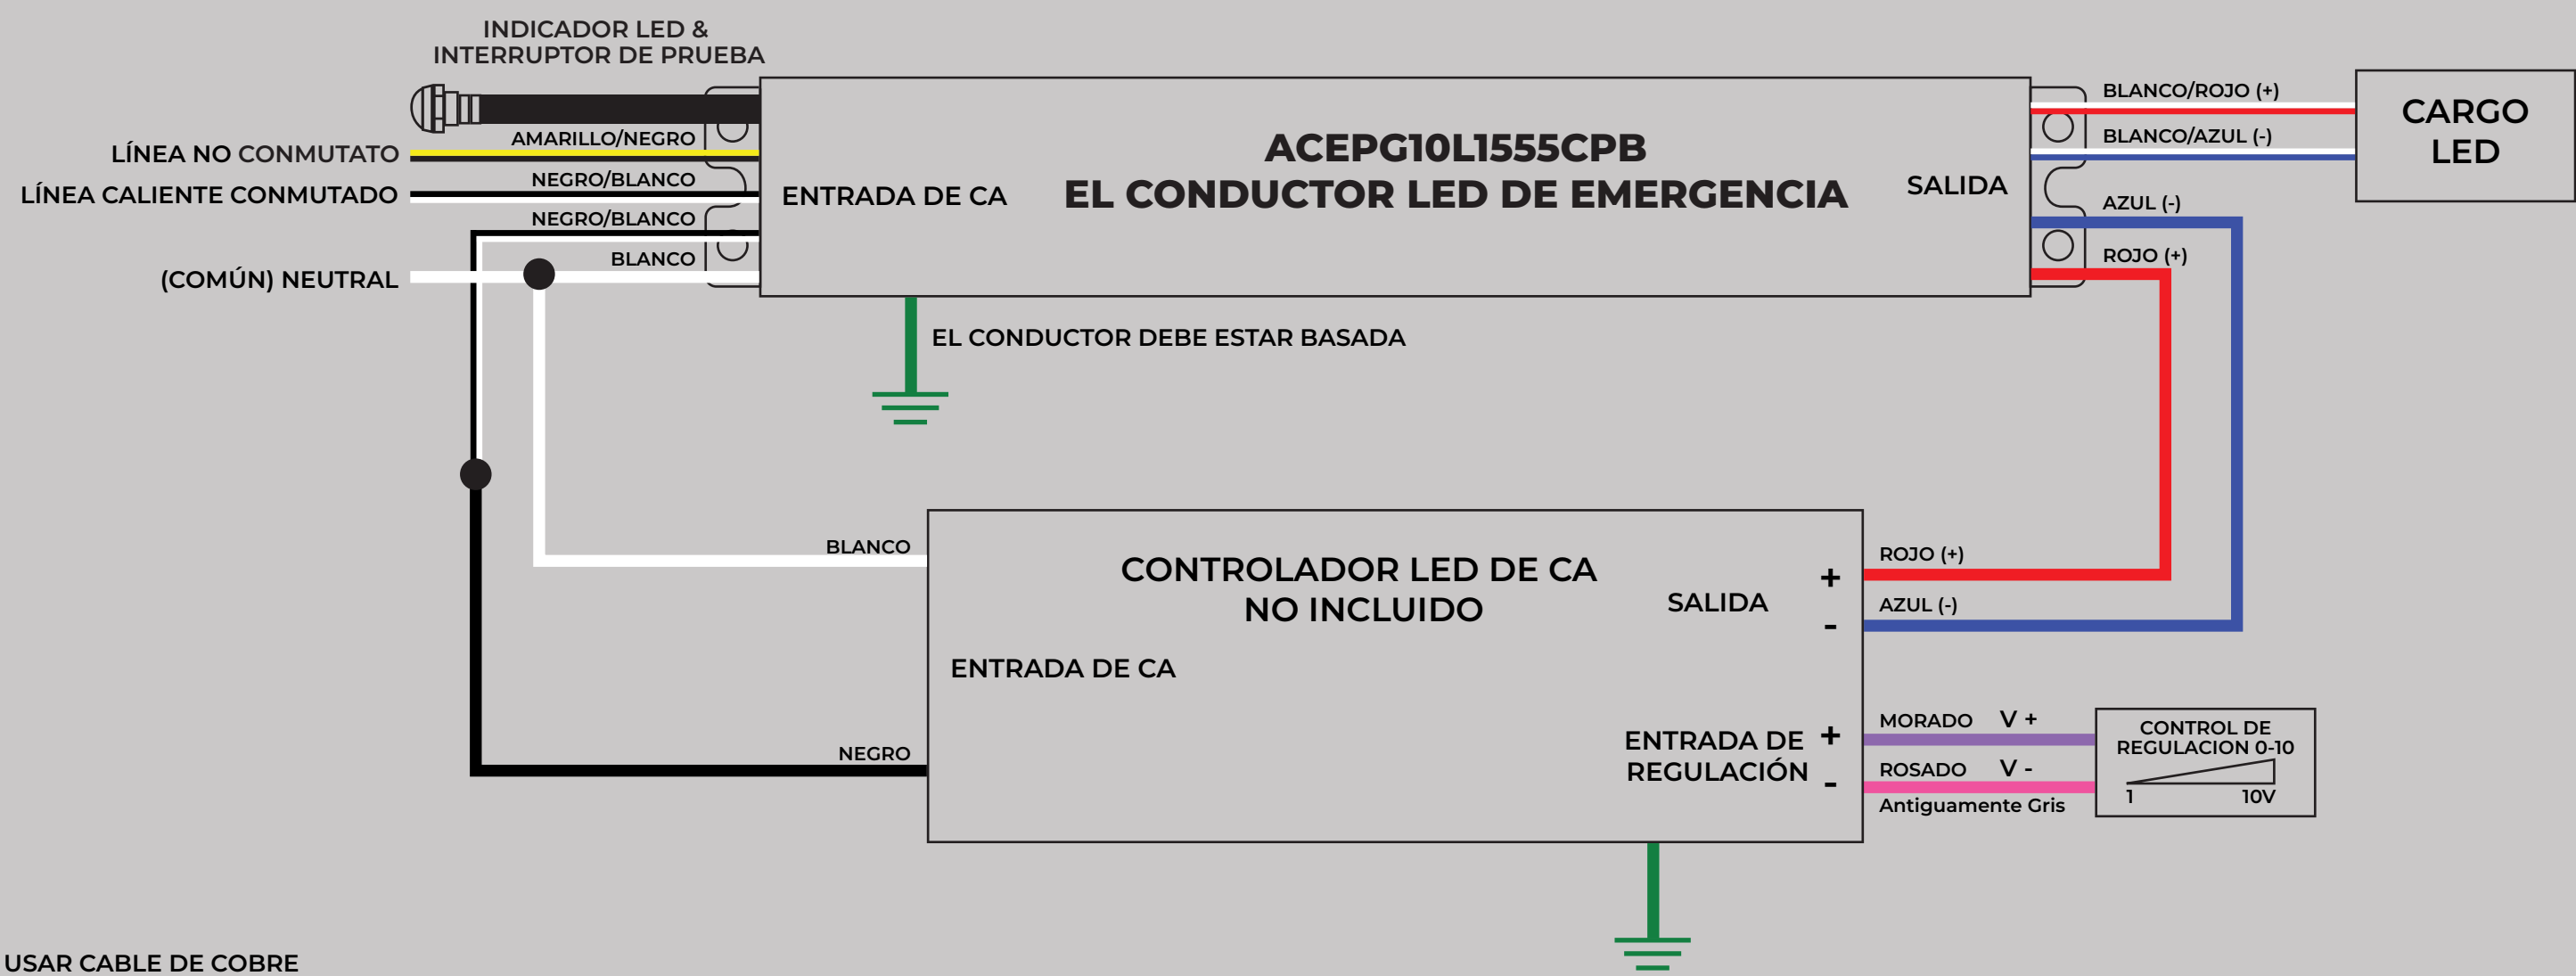

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

