

ENGLISH WIRING DIAGRAM

ACEPG41255CP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 12-55 V
- Output Current: 72 mA - 333 mA
- Output Power: 4 W
- Battery Voltage: 6.4 V

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours

Made in Taiwan • AM237

USE COPPER WIRE

- Battery Charge Current: 185 mA
- Battery Charge Time (min): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0 °C - 55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.


**ACE LEDS**
POWER

**UL**
LISTED
EMER. LIGHT &
POWER EQ.
SLC2
E50729

**TAA**
COMPLIANT

800-375-6355

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

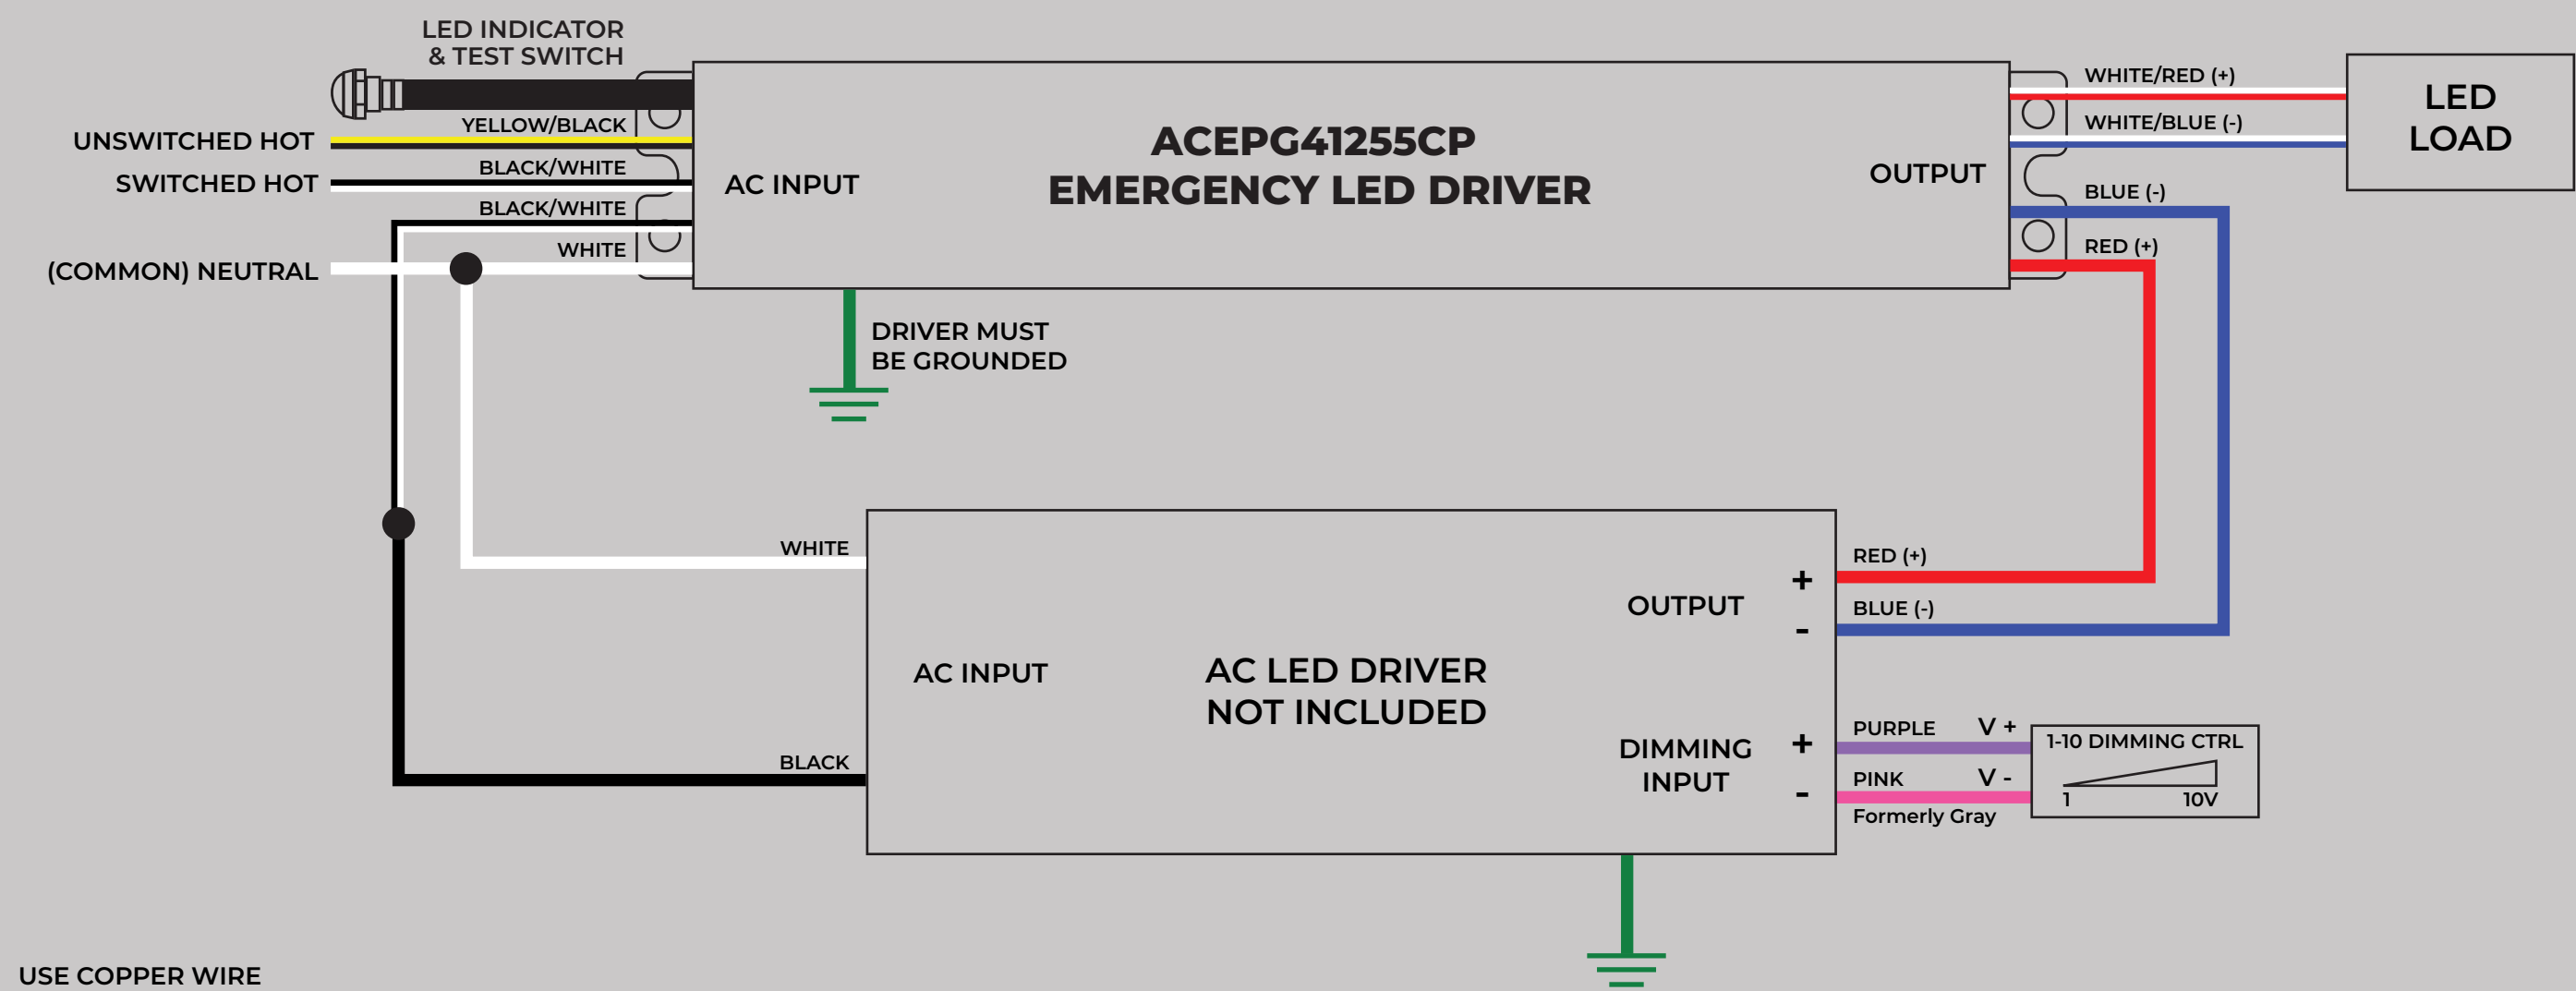

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

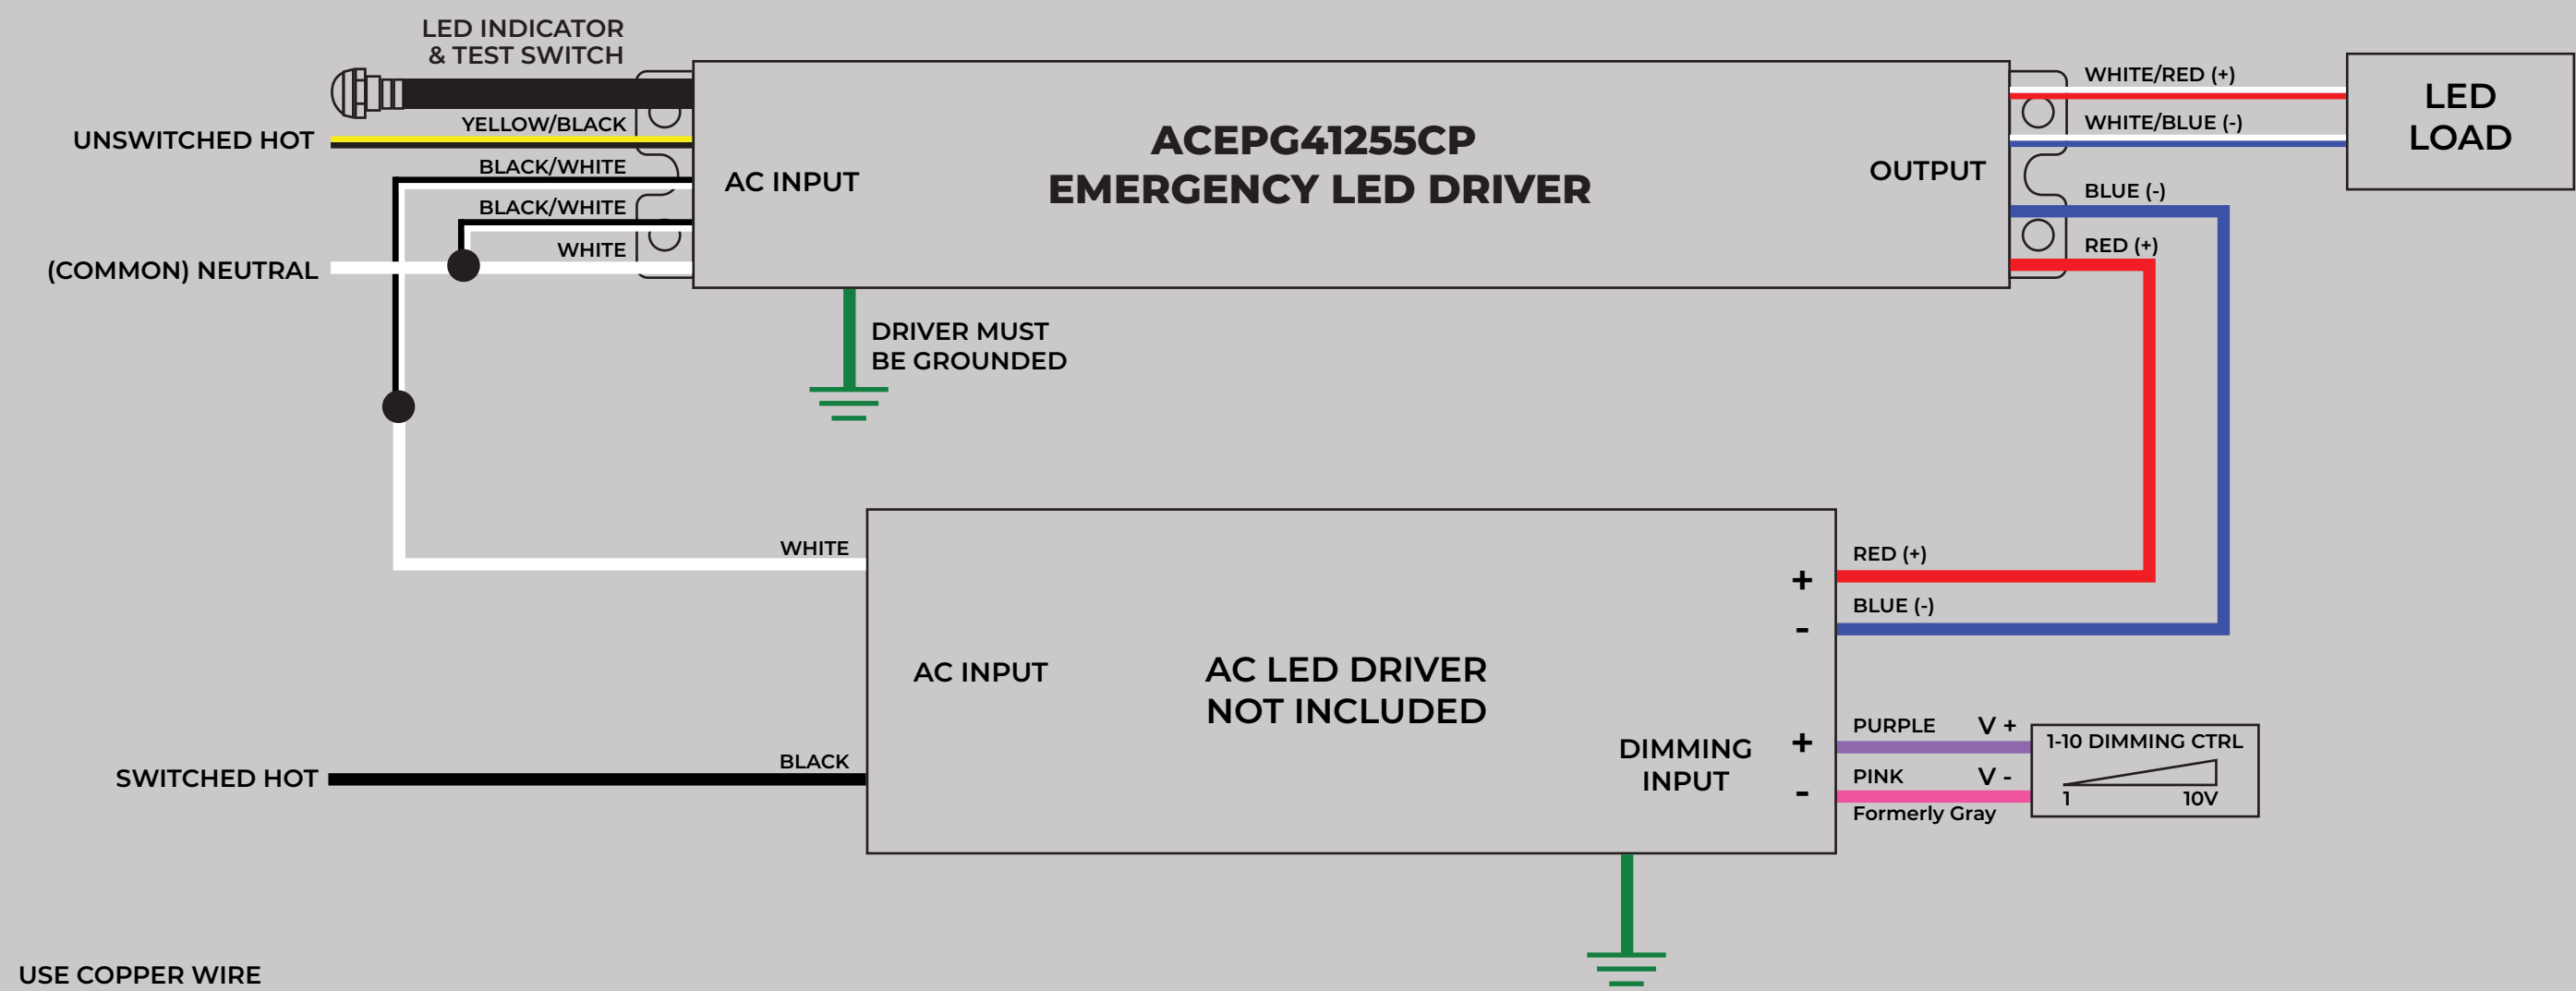


DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPG41255CP EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 12-55 V
- Output Current: 72 mA - 333 mA
- Output Power: 4 W
- Battery Voltage: 6.4 V

- Battery Charge Current: 185 mA
- Battery Charge Time (min): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0 °C - 55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

800-375-6355

UL US

TAA COMPLIANT

BC

POWER

LISTED EMER. LIGHT & POWER CO. 5LG2 E501729

CSA C22.2 No. 141
Emergency Lighting Equipment
Appareil d'éclairage de secours


Made in Taiwan • AM237

USE COPPER WIRE

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

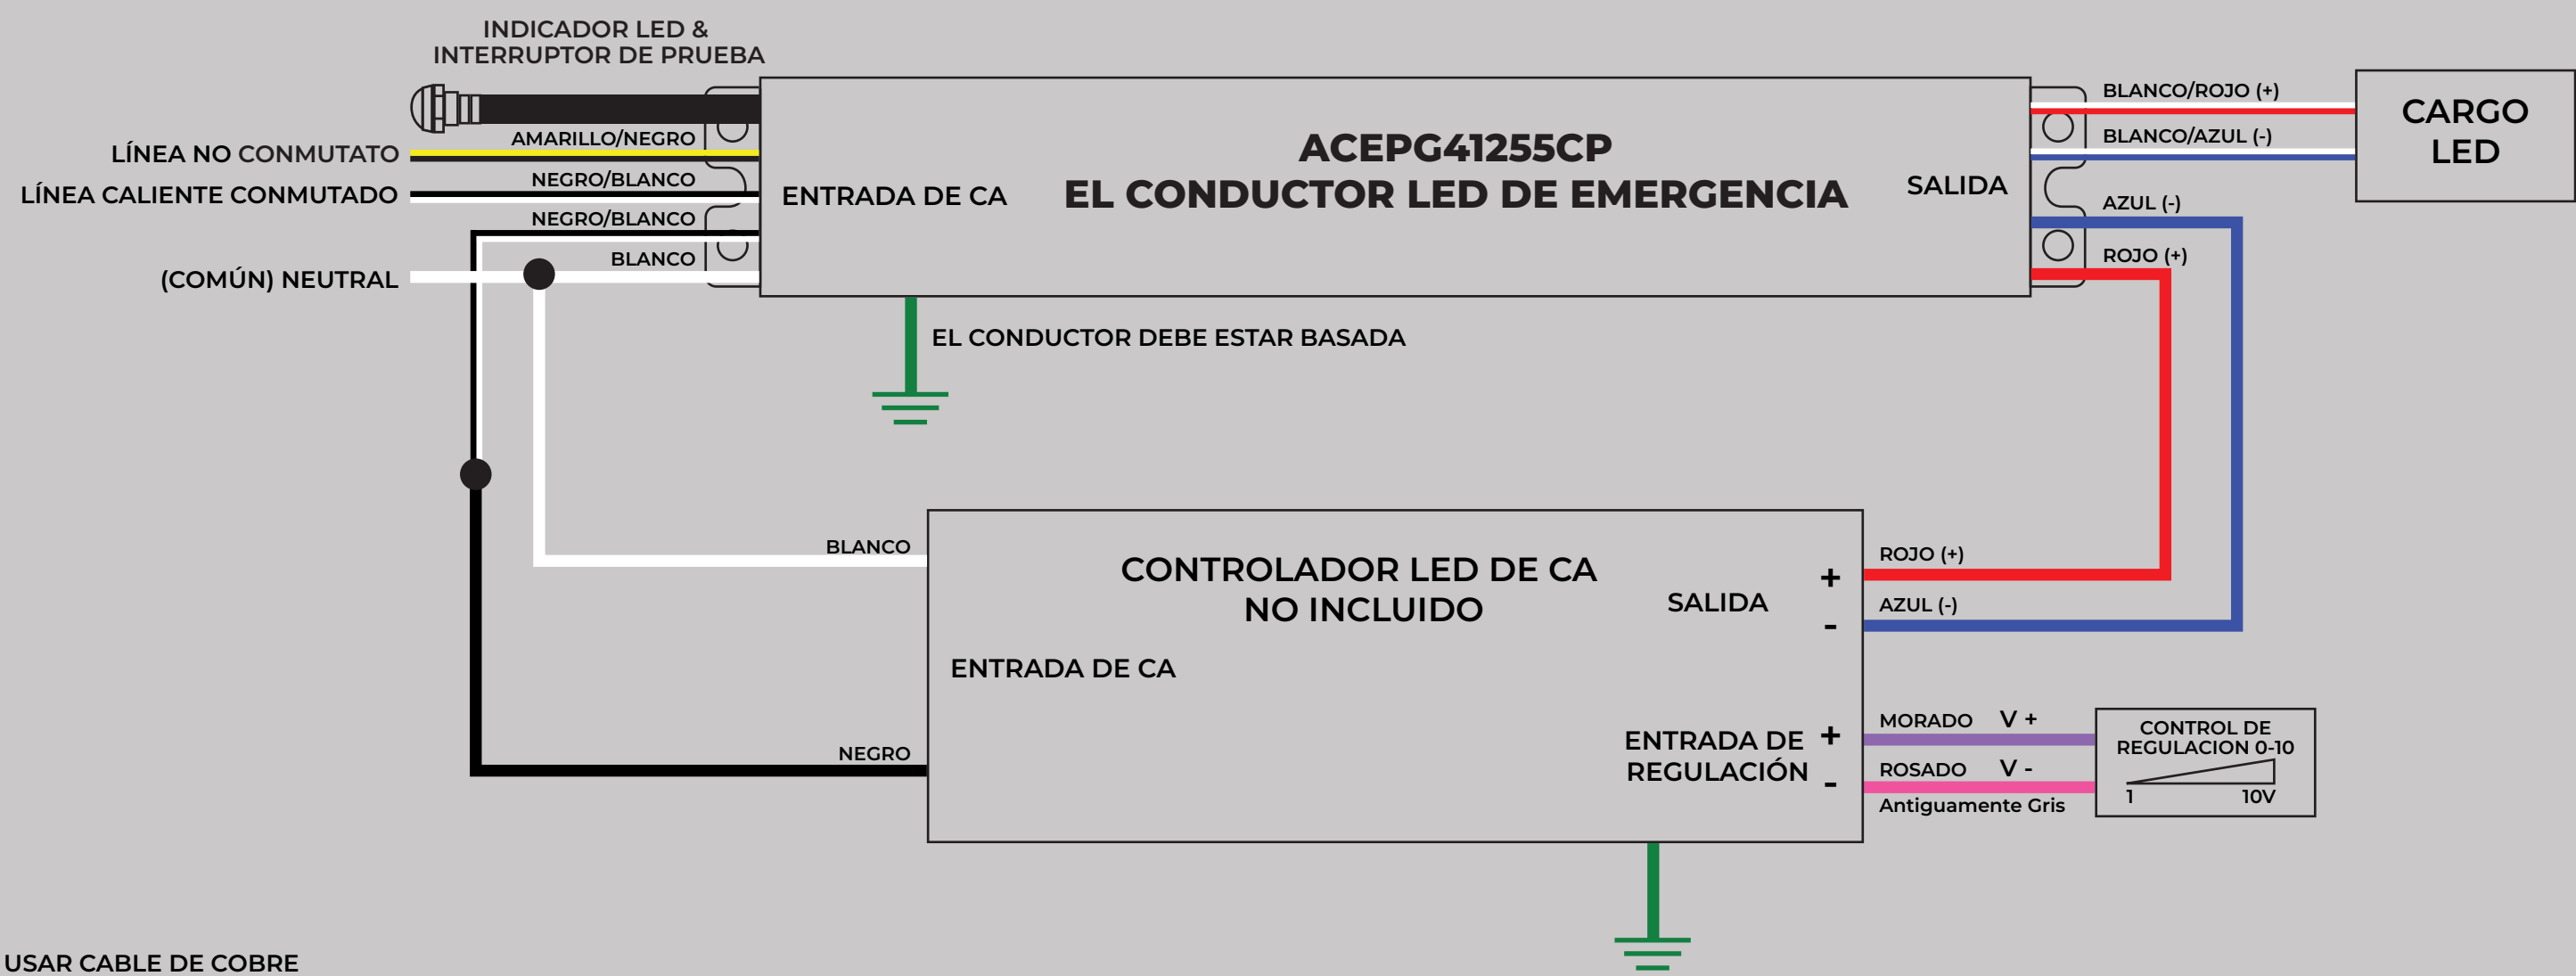

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

