

ENGLISH WIRING DIAGRAM

ACEPG41255CP8 EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 12-55 V
- Output Current: 72 mA - 333 mA
- Output Power: 4 W
- Battery Voltage: 6.4 V
- Battery Charge Current: 185 mA
- Battery Charge Time (min): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0 °C - 55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation

CSA C22.2 No. 141.

Emergency Lighting Equipm


Appareil d'éclairage de secours
Made in Taiwan • AM237
USE COPPER WIRE

800-375-6355


CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

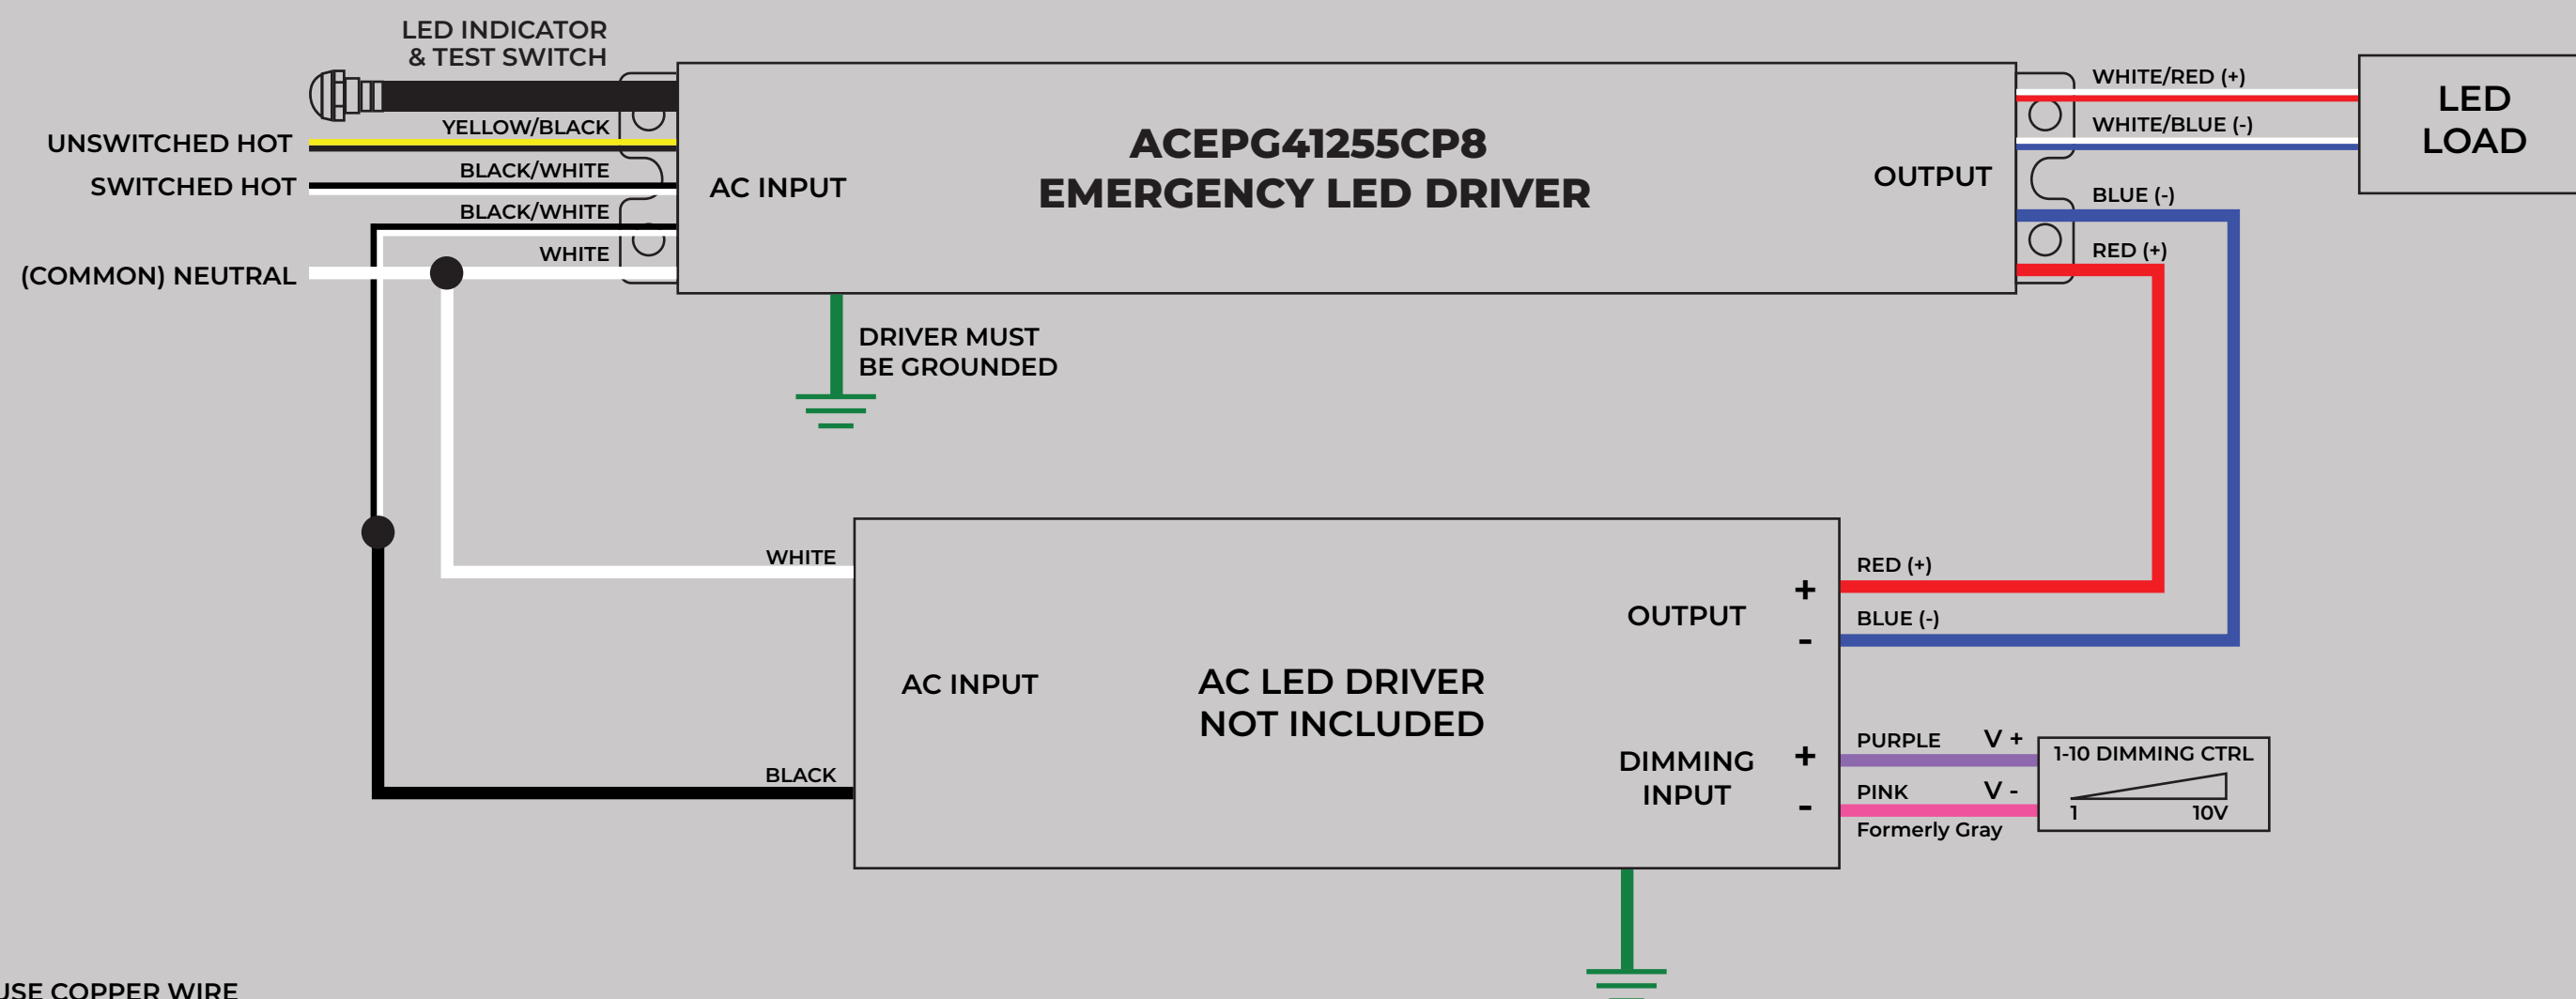

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

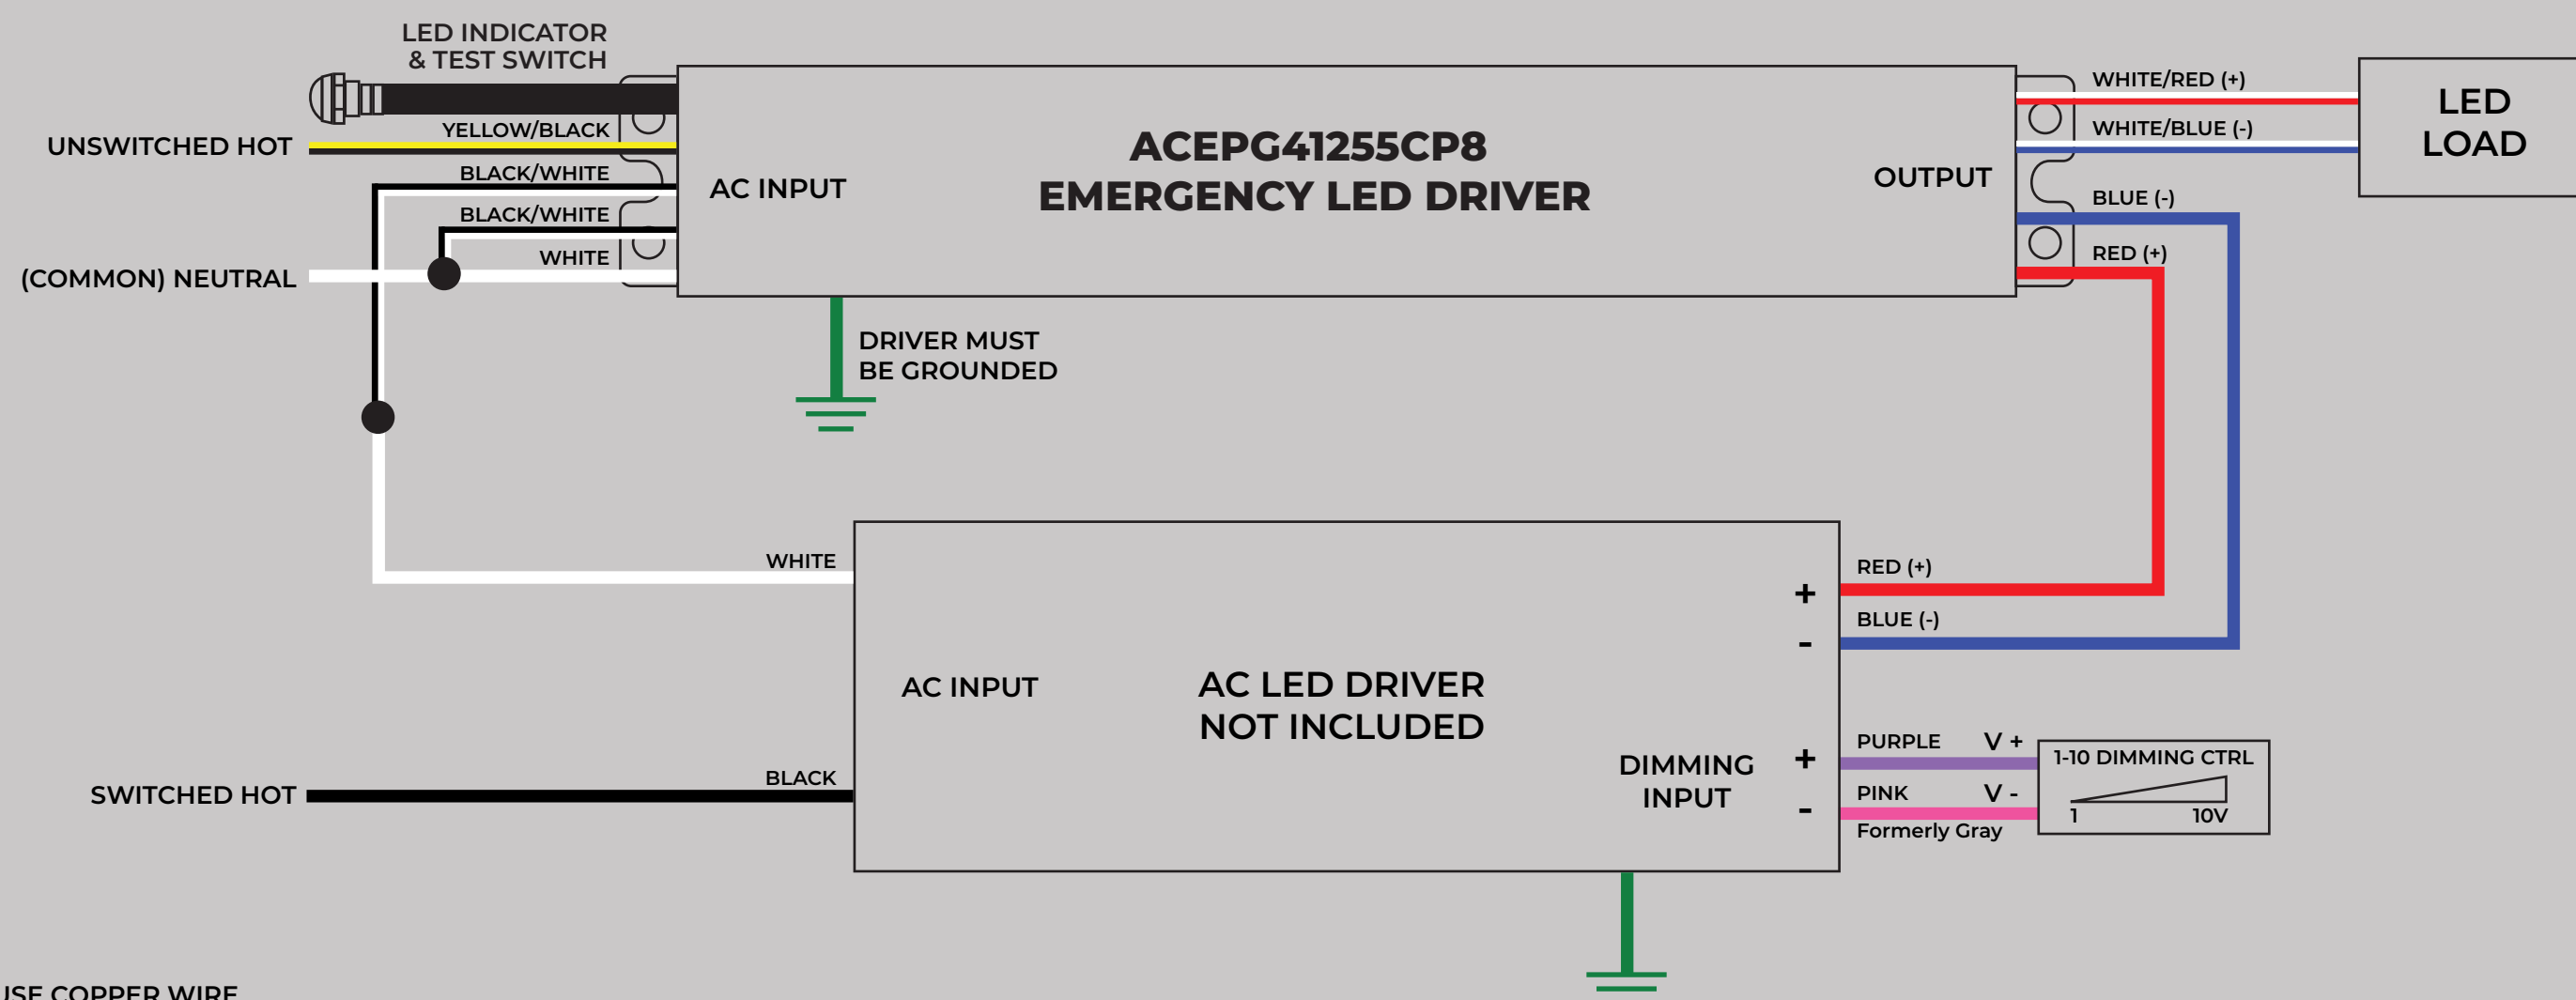

aceleds.com | 800-375-6355

DIAGRAMA DE CABLEADO ESPAÑOL

ACEPG41255CP8 EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 12-55 V
- Output Current: 72 mA - 333 mA
- Output Power: 4 W
- Battery Voltage: 6.4 V
- Battery Charge Current: 185 mA
- Battery Charge Time (min): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0 °C - 55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AM237


CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.


800-375-6355



A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

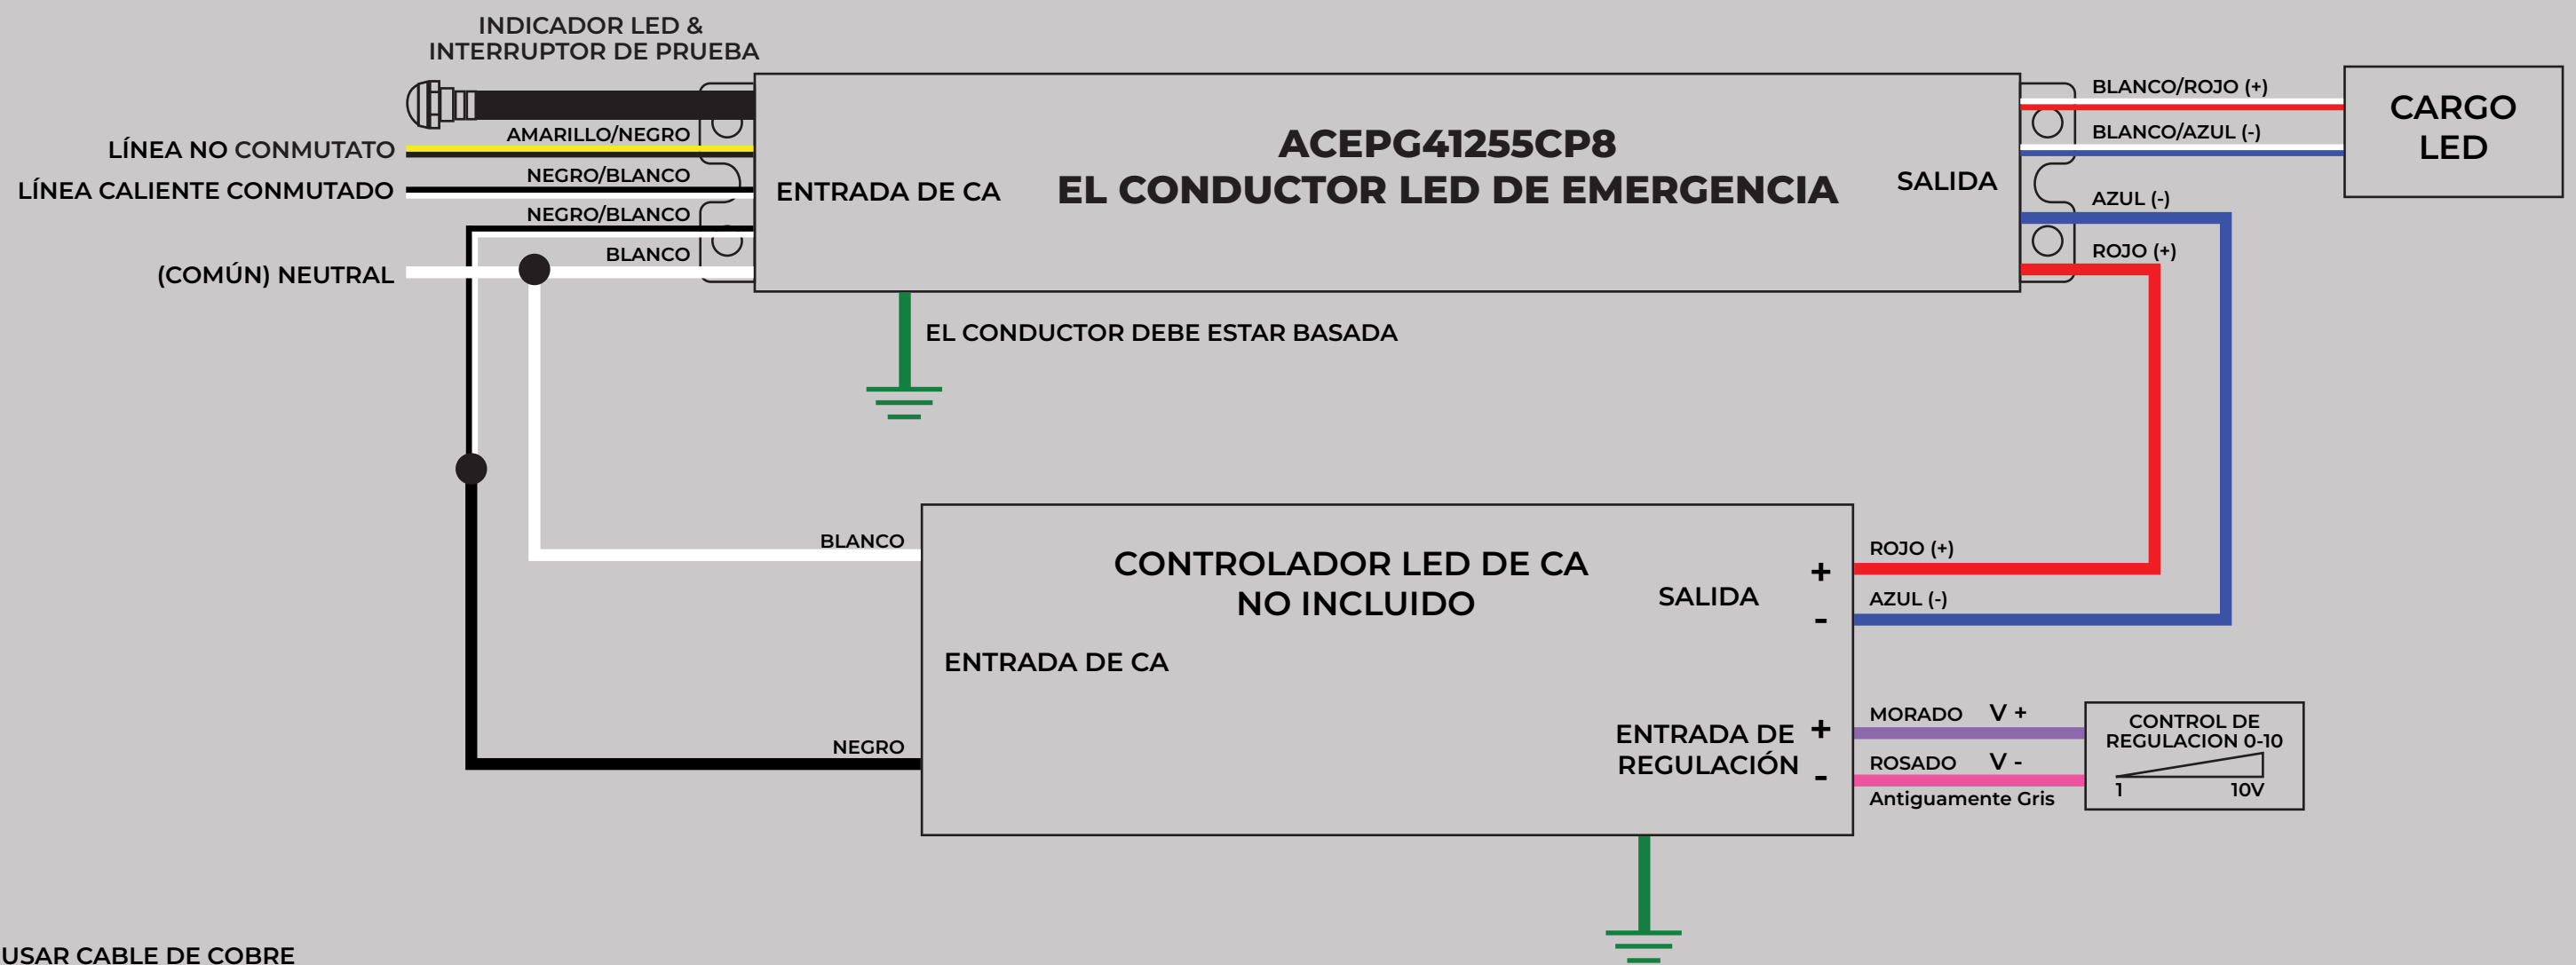

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

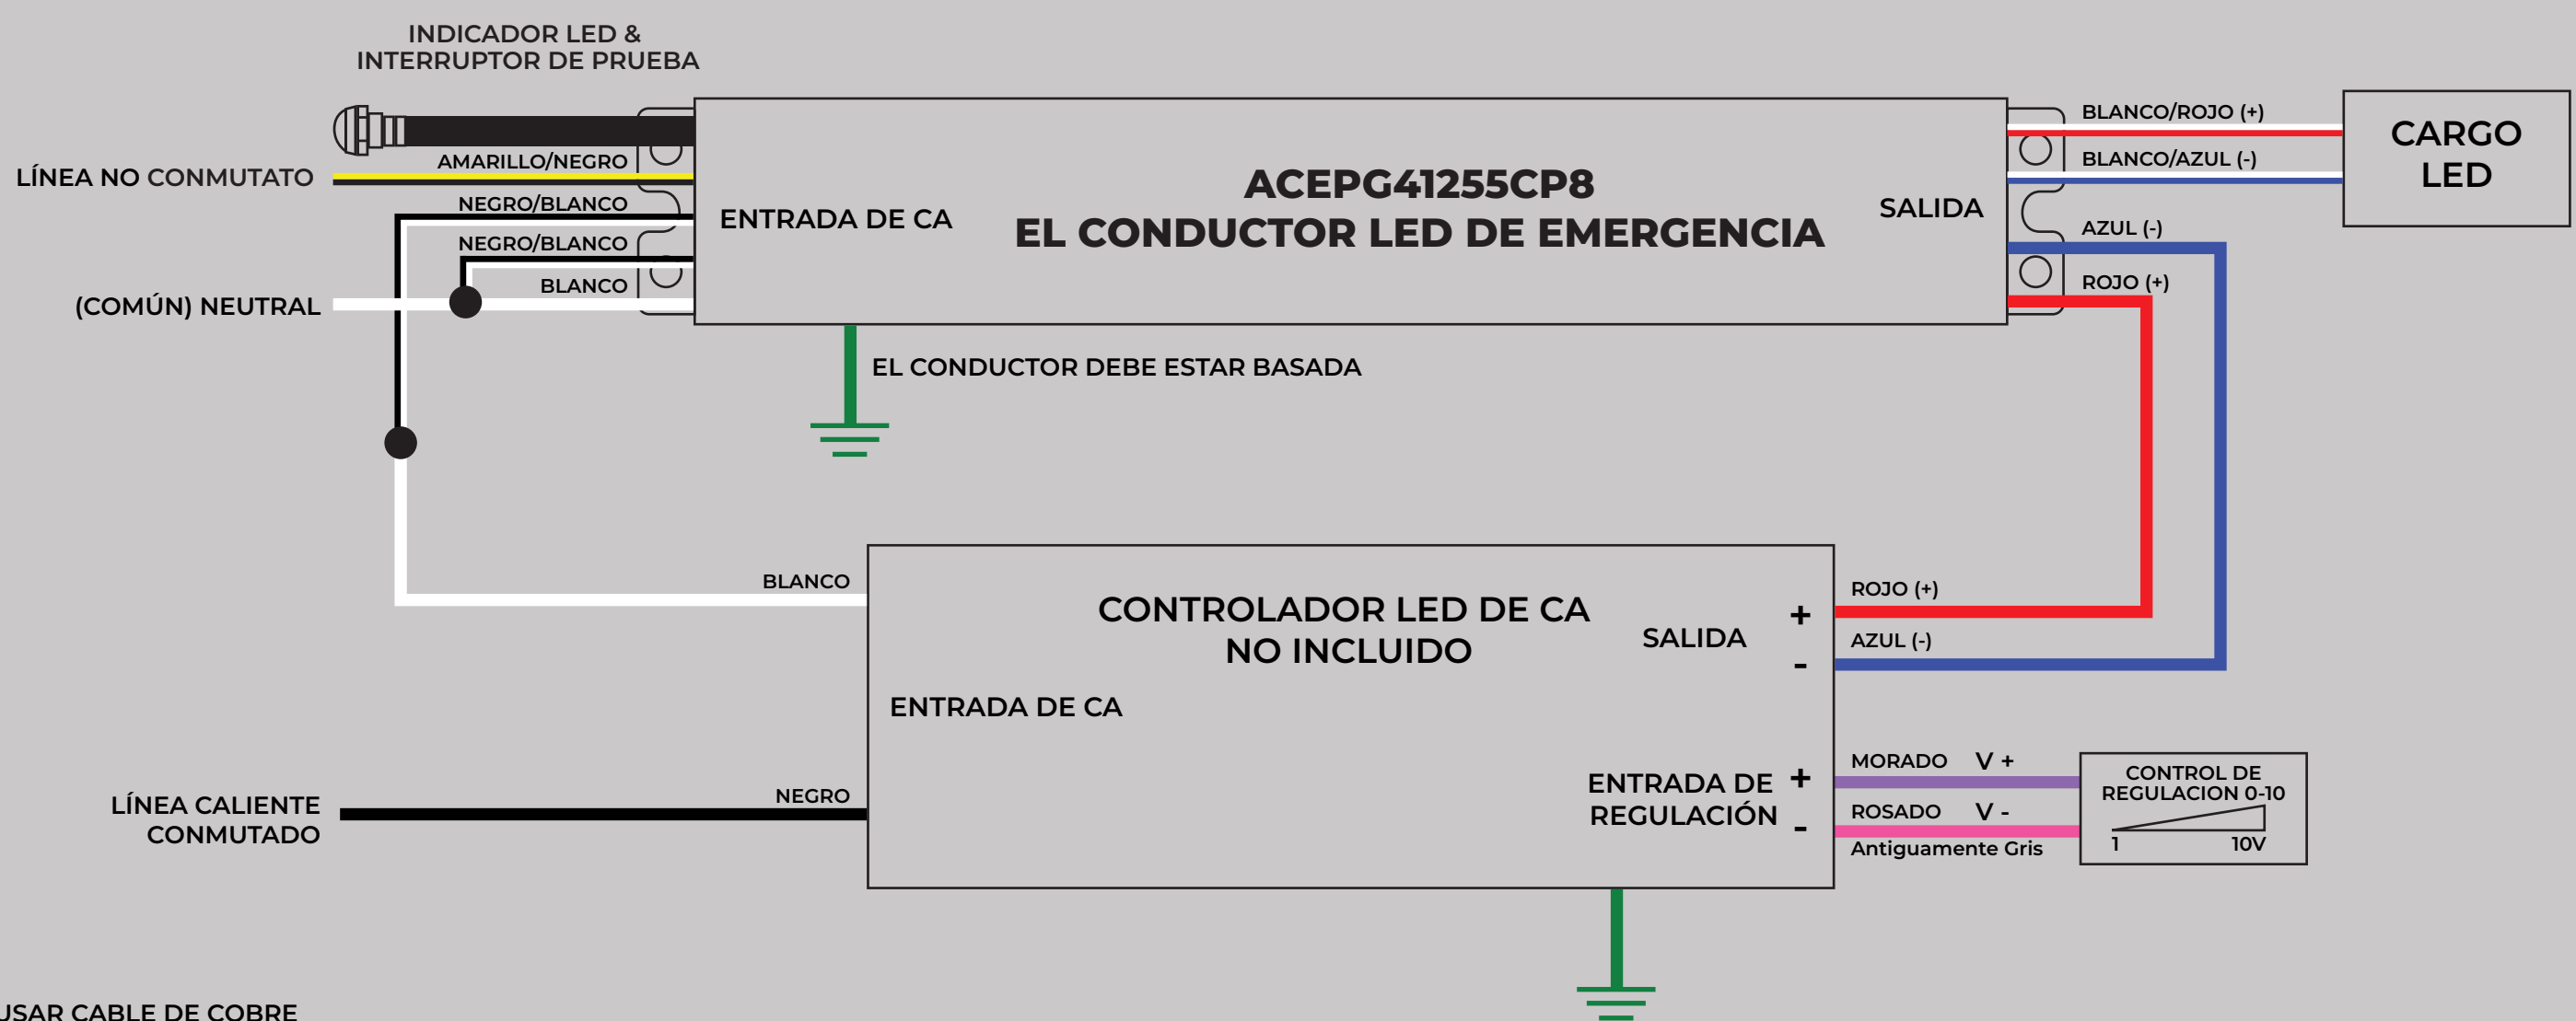

aceleds.com | 800-375-6355