

ACE-H7DC180CPO FRONT-END EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 140 mA
- Input Power: 11 W
- Output Voltage: 120 - 180 Vdc
- Output Current: 41 mA
- Output Power: 7 W
- Battery Voltage: 10.8 V
- Battery Charge Current: 120 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min
- Ambient Temperature: 0-50 °C
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.




CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AM202




800-375-6355

WIRING DIAGRAM FOR OPERATING ONE SINGLE FIXTURE


A. WITH DIMMABLE LED DRIVER WITH EXTERNAL DIMMING CONTROLLER

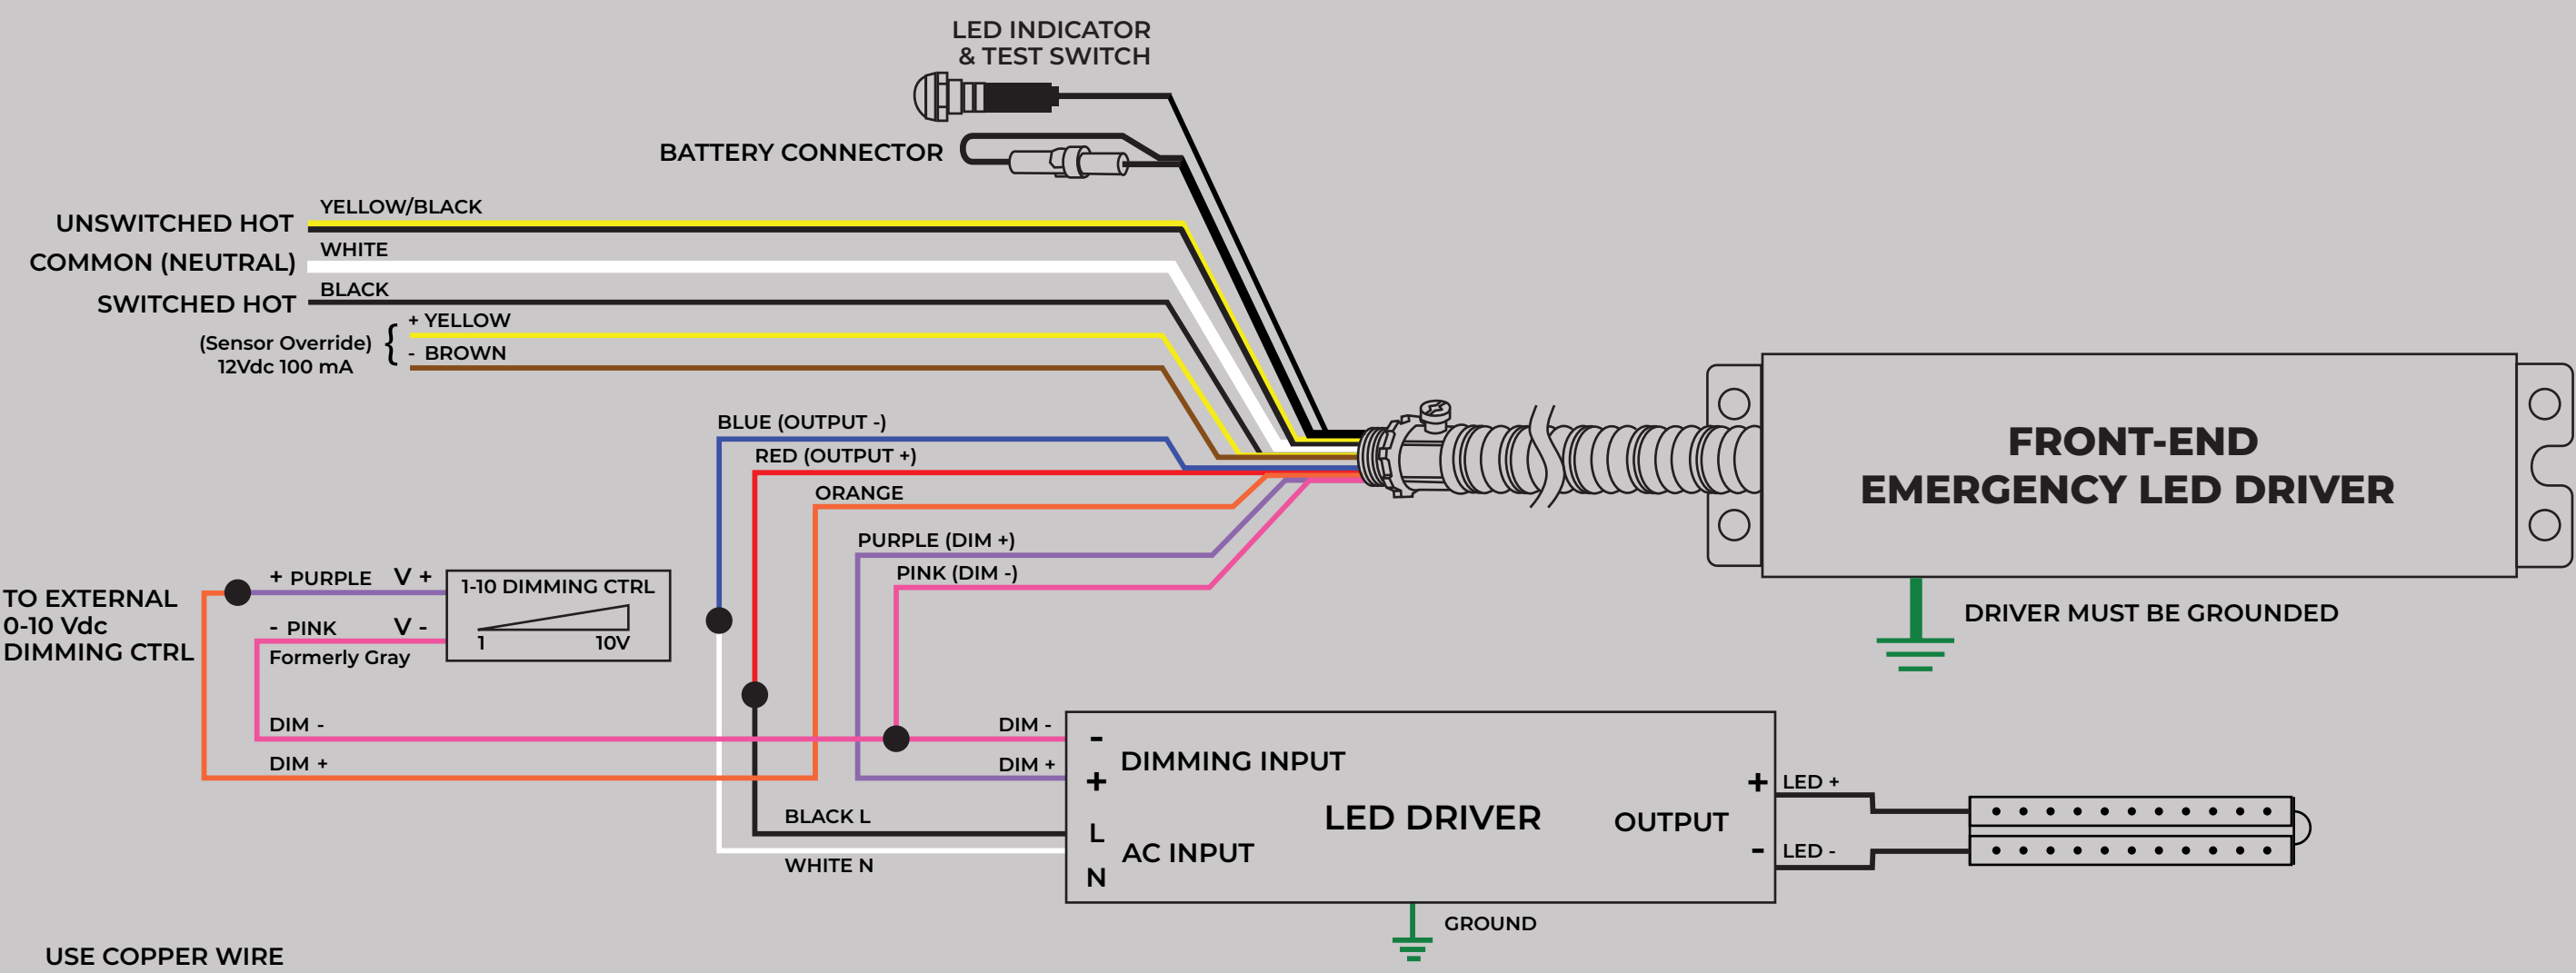

B. WITH DIMMABLE LED DRIVER WITHOUT EXTERNAL DIMMING CONTROLLER

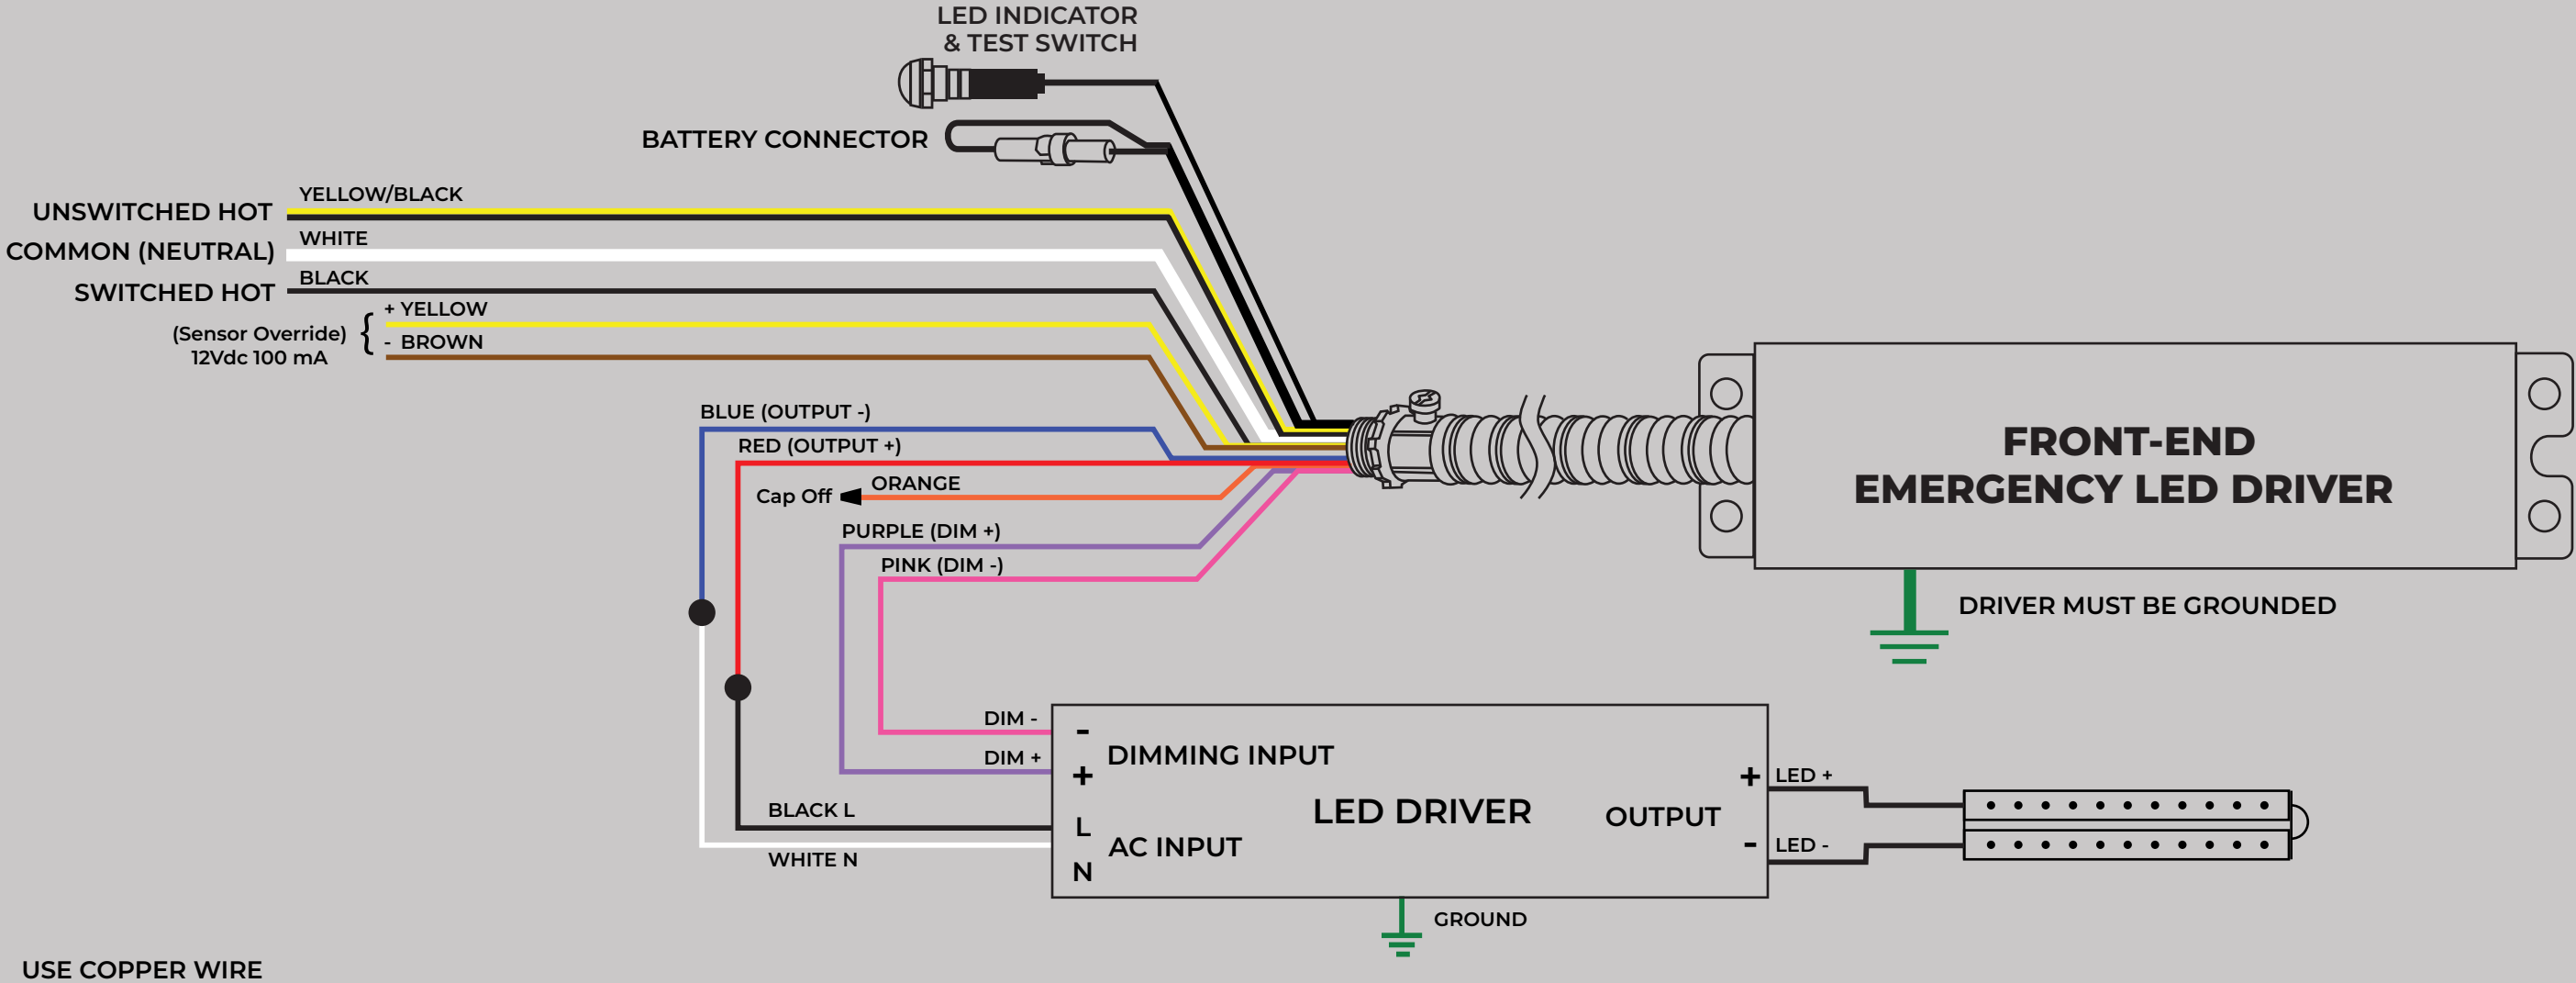

C. WITH DIMMABLE LED DRIVER WITHOUT EXTERNAL DIMMING CONTROLLER (NOTE: FOR THIS UNSWITCHED LINE APPLICATION, CONNECT THE SWITCHED HOT (BLACK WIRE) TO THE UNSWITCHED HOT (YELLOW/BLACK WIRE)).

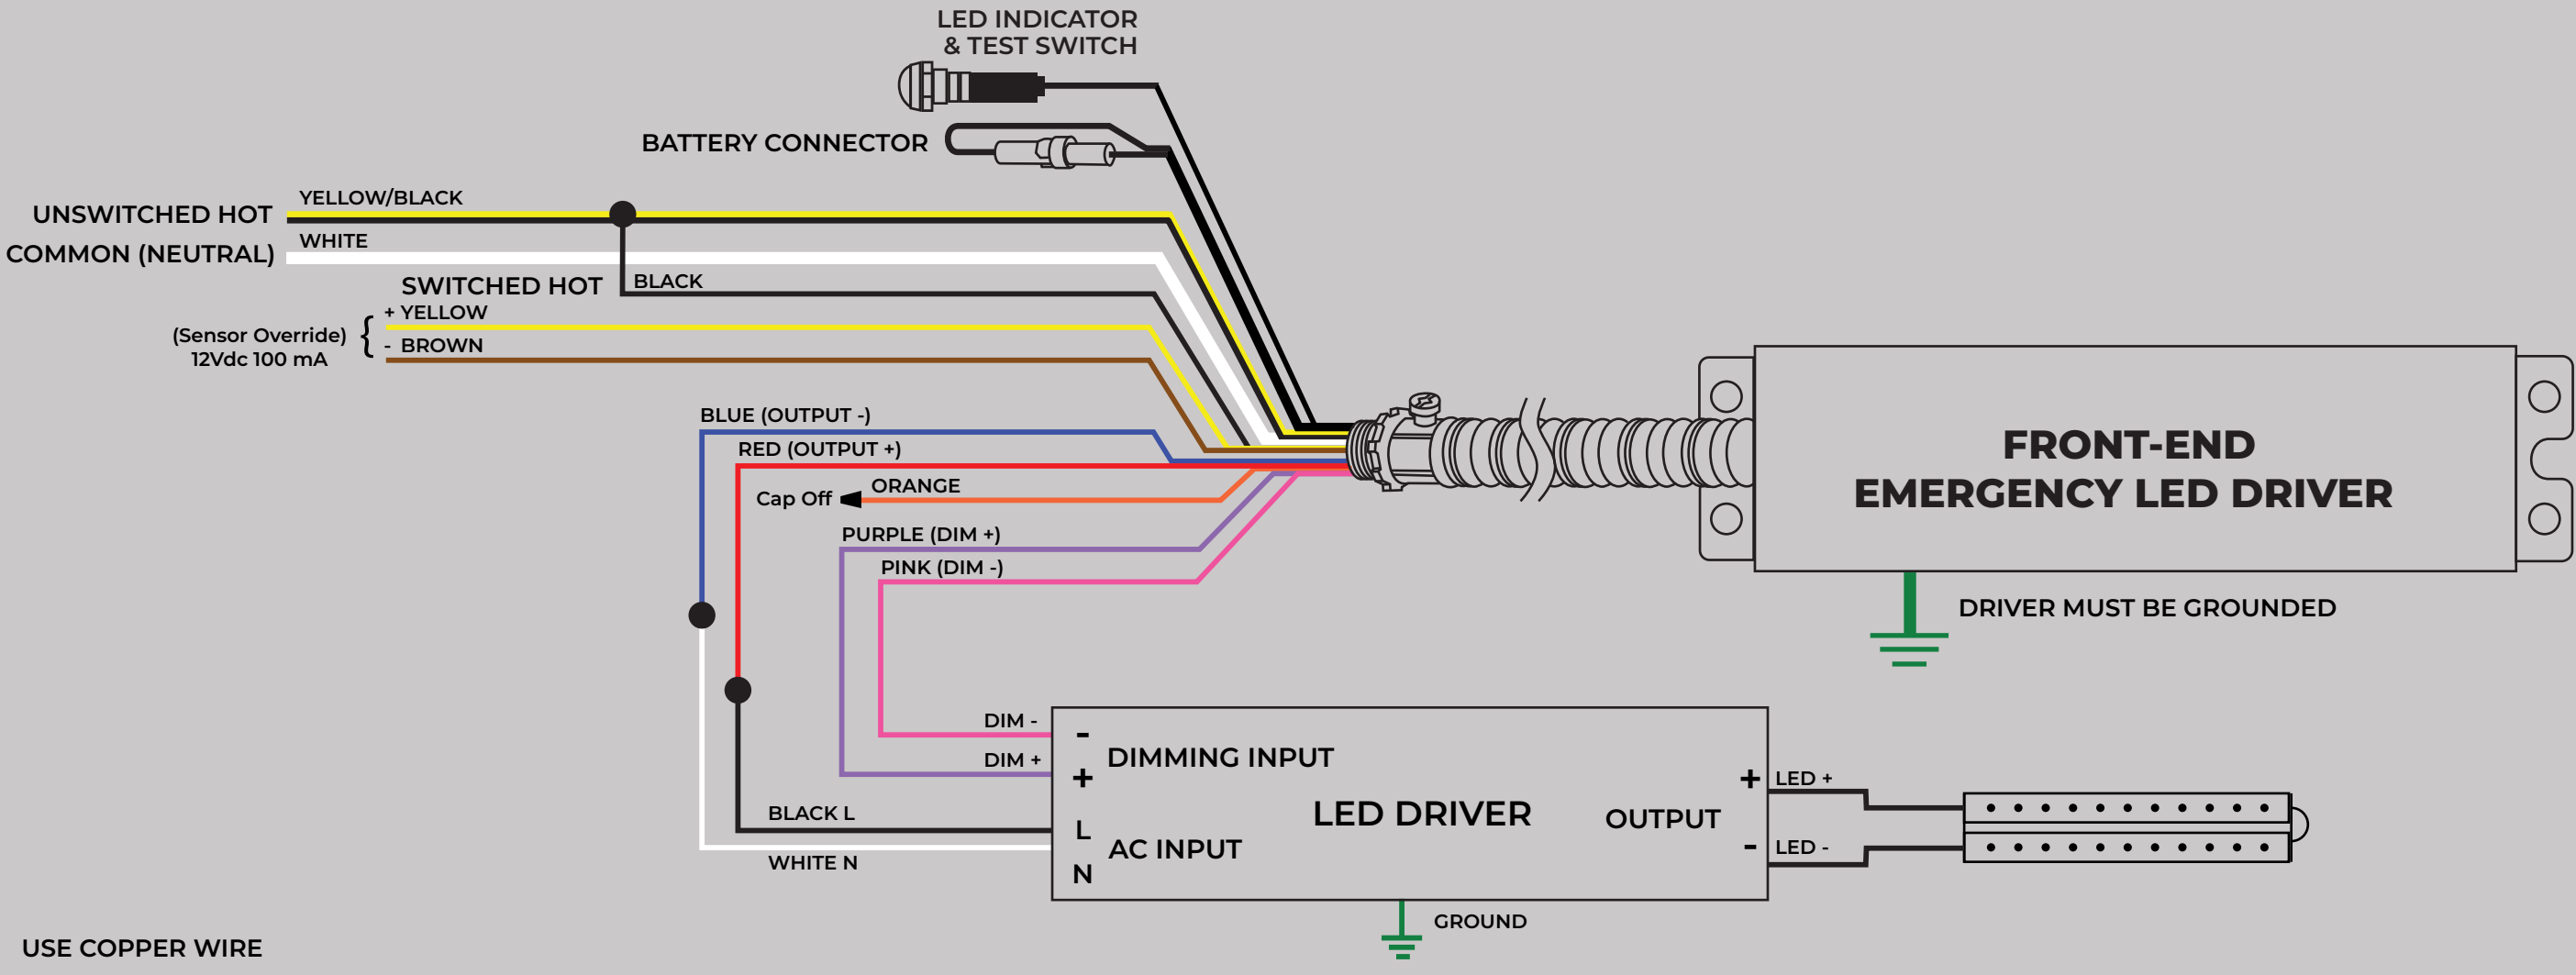

D. FOR APPLICATIONS WITHOUT A DIMMABLE LED DRIVER (NOTE: FOR THIS CONFIGURATION, THE LED DRIVER'S POWER DRAW MUST NOT EXCEED THE EMERGENCY LIGHTING POWER SUPPLY'S OUTPUT POWER RATING.)

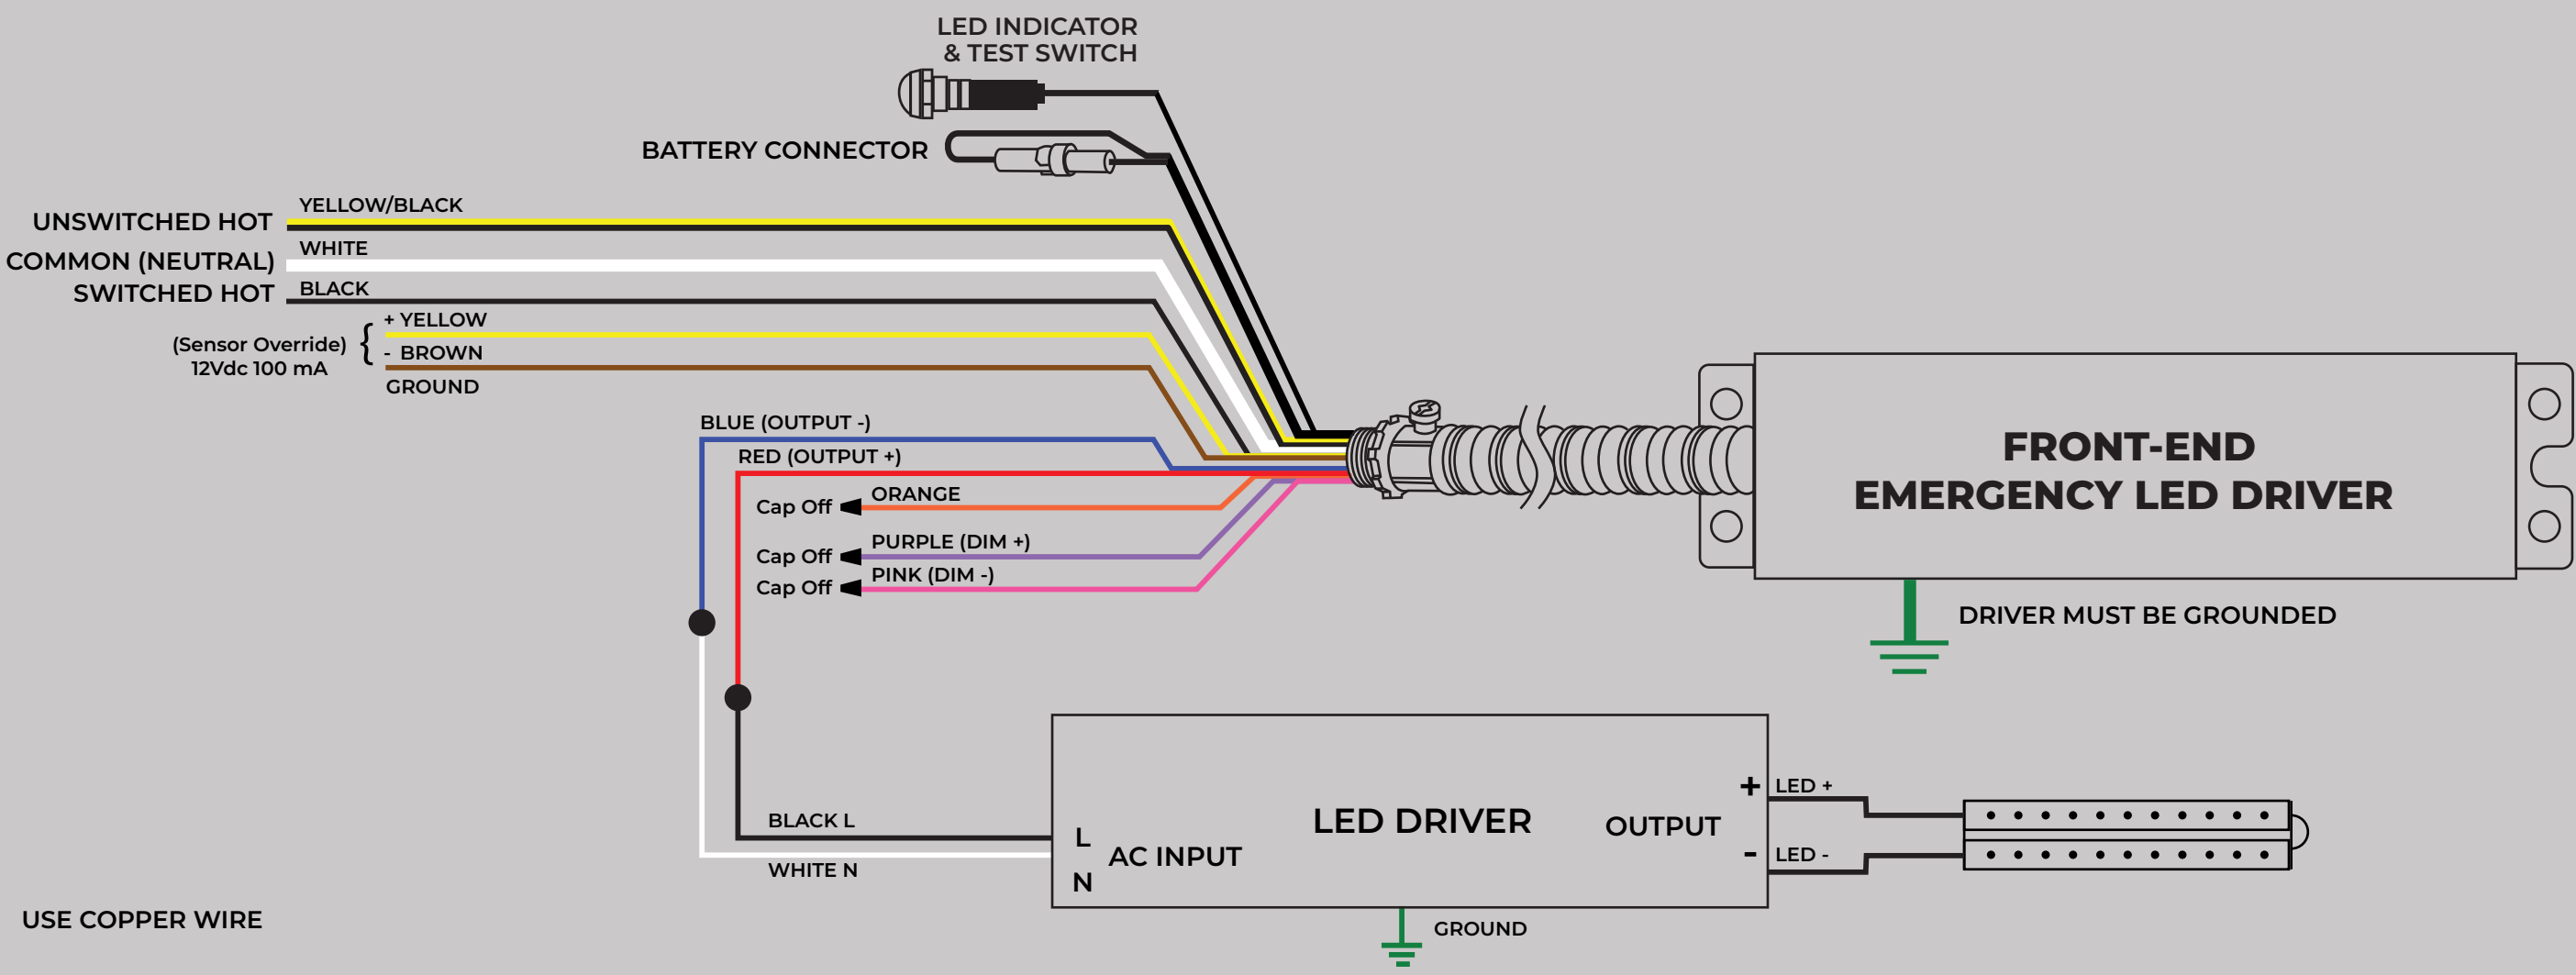


DIAGRAMA DE CABLEADO EN ESPAÑOL

ACE-H7DC180CPO FRONT-END EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 140 mA
- Input Power: 11 W
- Output Voltage: 120 - 180 Vdc
- Output Current: 41 mA
- Output Power: 7 W
- Battery Voltage: 10.8 V
- Battery Charge Current: 120 mA

- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min
- Ambient Temperature: 0-50 °C
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

POWER

TAA COMPLIANT

CSA C22.2 No. 141
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AM202

LISTED
EMER. LIGHT &
POWER SUP.
E501729

800-375-6355

DIAGRAMA DE CABLEADO PARA OPERAR UNA SOLA LUMINARIA

