

ENGLISH WIRING DIAGRAM

ACEPG101555BEMC

EMERGENCY LED DRIVER

CXA C222 No.14
Emergency Lighting Equipment
Équipement d'éclairage de secours

Made in Taiwan - AMTITECH

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current: 100 mA
- Input Power: 8 W
- Output Voltage: 55.55 Vdc
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 7.2 V
- Battery Charge Current: 185 mA

- Battery Charge Time (T_{ch}): 24 Hrs
- Standby Time: 1000 Hrs @ 25 °C min
- Ambient Temperature: 0-55 °C
- Output Currents: 4 Outputs
- Suitable for damp locations
- Suitable for 0-10V dimming
- For metal enclosed wiring system

CAUTION: See Instruction manual for Installation, operation, and maintenance instructions. Service by Qualified Personnel only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air circuits.

USE COPPER WIRE

POWER

POWER

TAA


RECYCLED

UL
LISTED
ELECTRICAL
EQUIPMENT

ACE
LEDs

800-375-6355

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

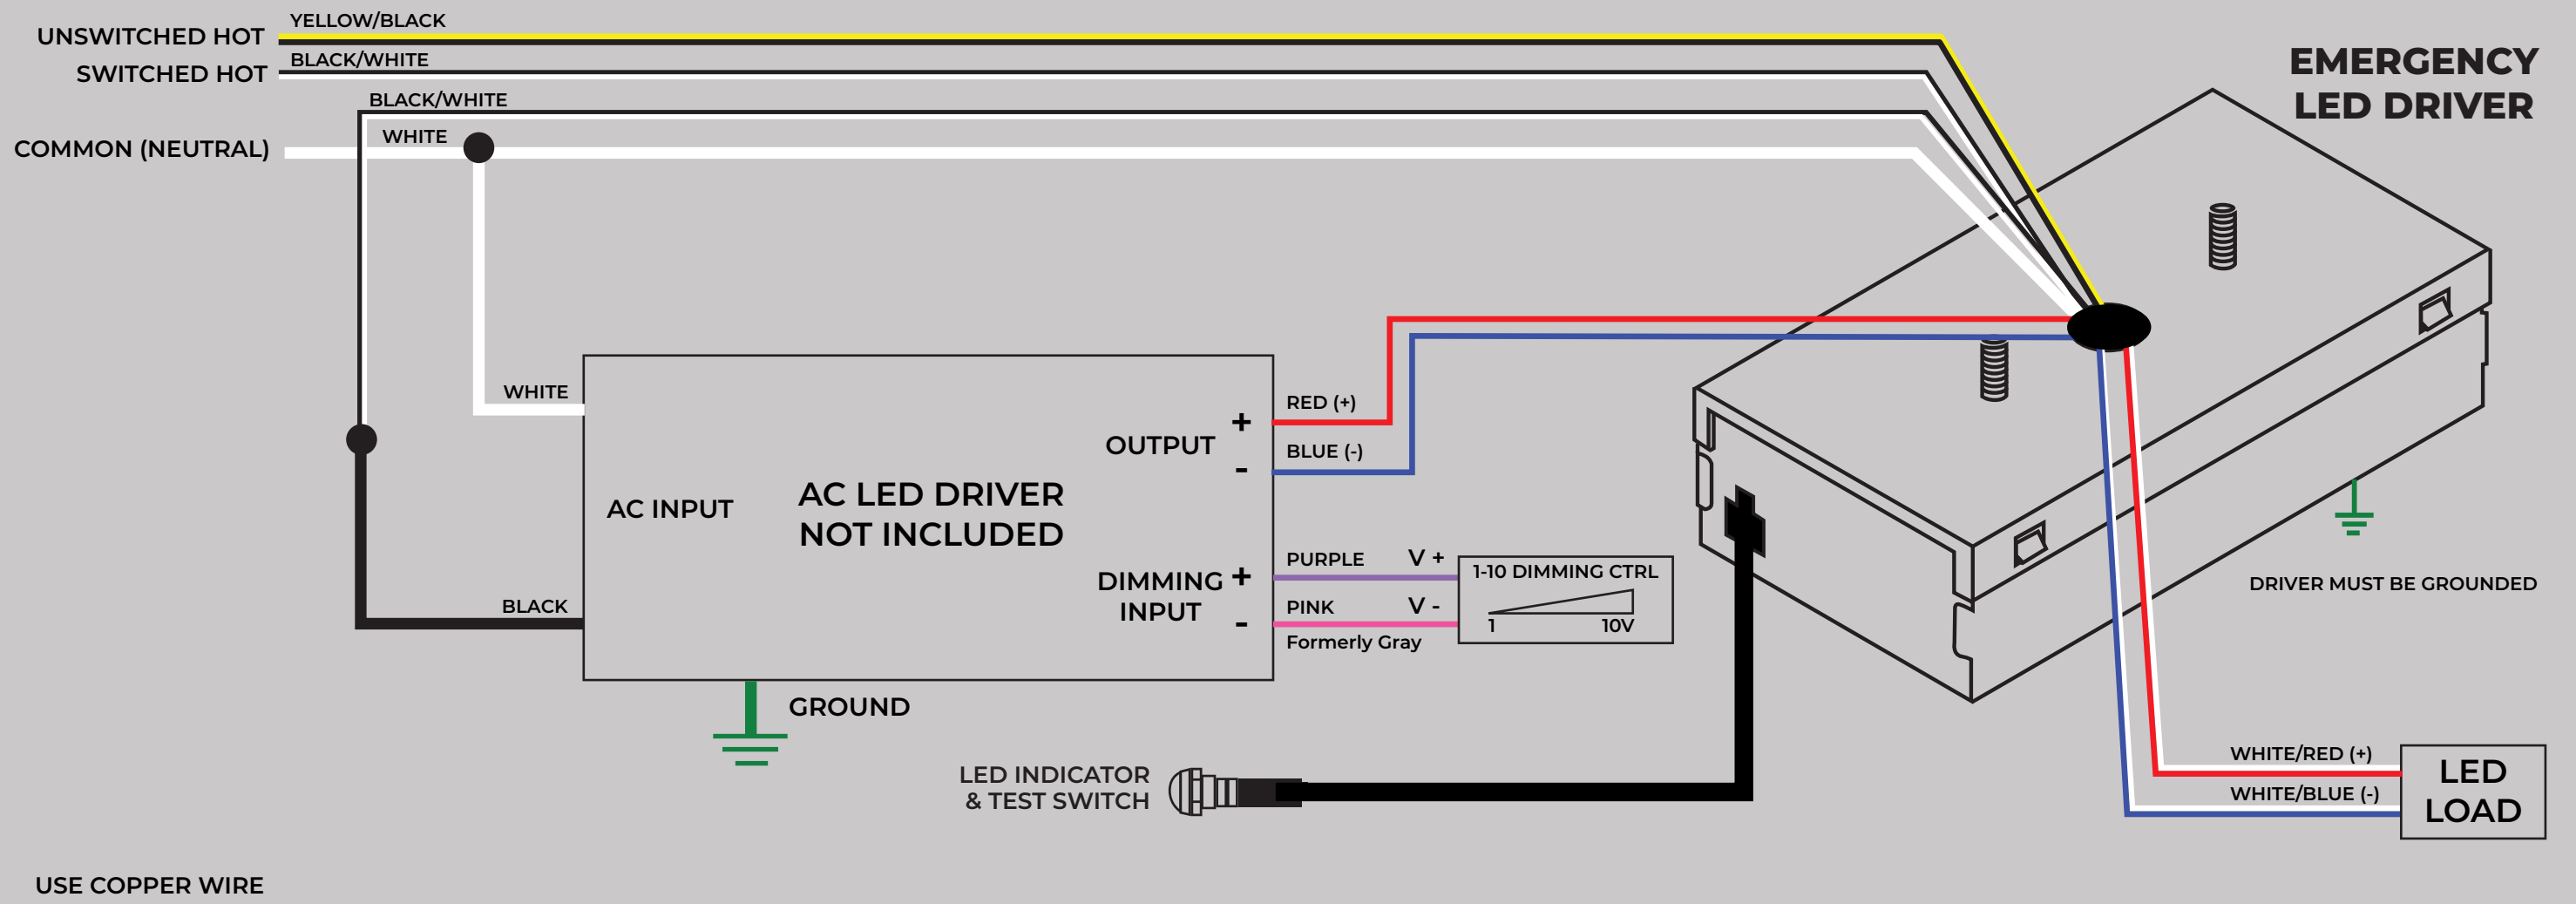

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

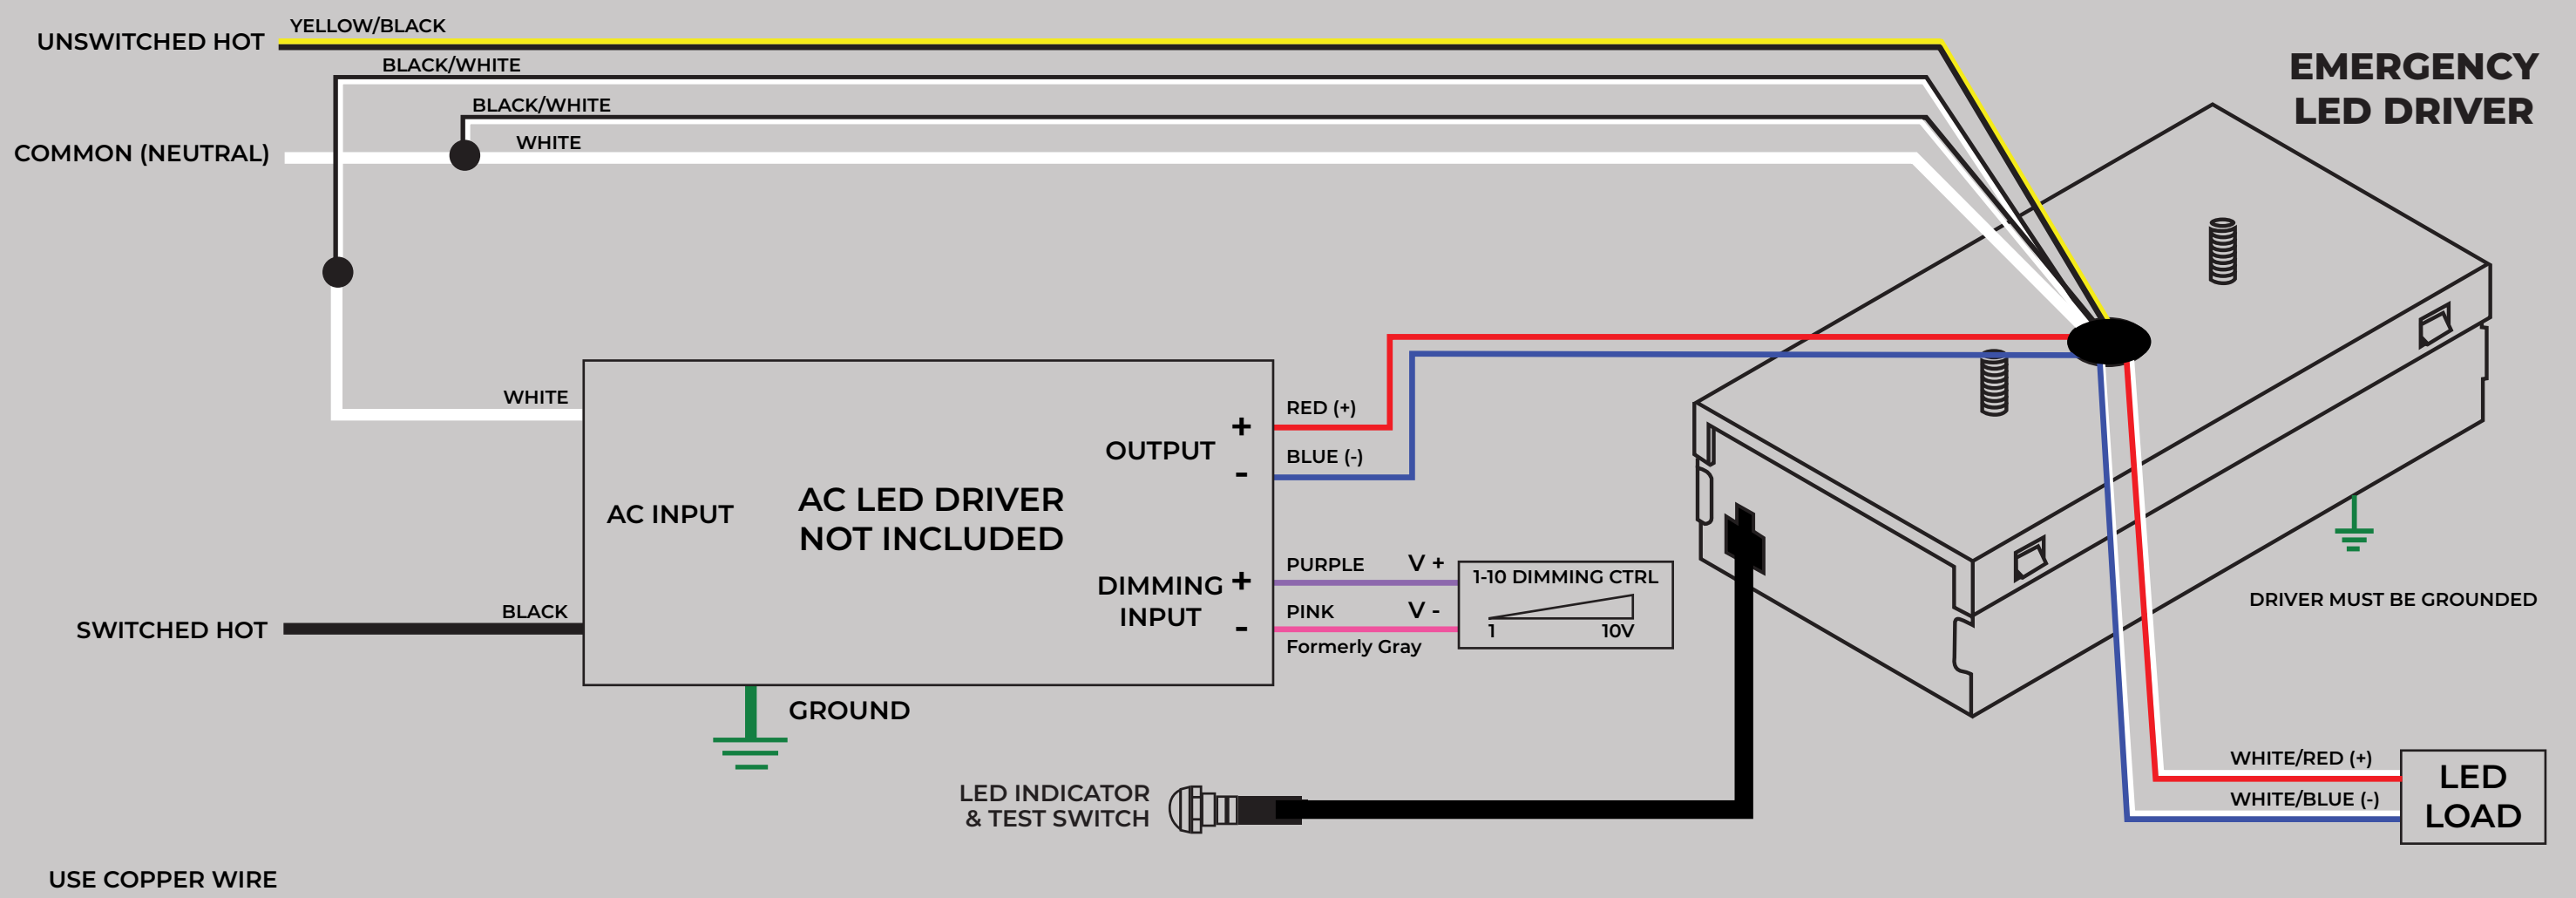


DIAGRAMA DE CABLEADO
ESPAÑOL

**ACEPG101555BEMC
EMERGENCY LED DRIVER**

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 100 mA
- Input Power: 8 W
- Output Voltage: 15-55 Vdc
- Output Current: 100 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 2.2 V
- Battery Charge Current: 185 mA

- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.



800-375-6355

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

 **ACE LEDS**
WE BRING THE POWER

aceleds.com | 800-375-6355

©2025 3Nov2025 / DC