

ENGLISH WIRING DIAGRAM

ACEPG10MT1555CP COLD START EMERGENCY LED DRIVER

- Input Voltage: 120~277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 3 W
- Output Voltage: 16.5 V
- Output Current: 100 mA ~ 670 mA
- Output Power: 10 W
- Battery Voltage: 7.2 V
- Battery Charge Current: 500 mA

- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: -20 ~ 55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

Titan
C* Cold Start
POWER

POWER MITSUBISHI
TAAI
UL
CE
RoHS
RECYCLE

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AM251


ACE LEDS

800-375-6355

USE COPPER WIRE

BATTERY MUST BE CHARGED 12 MOS FROM MFC DATE

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

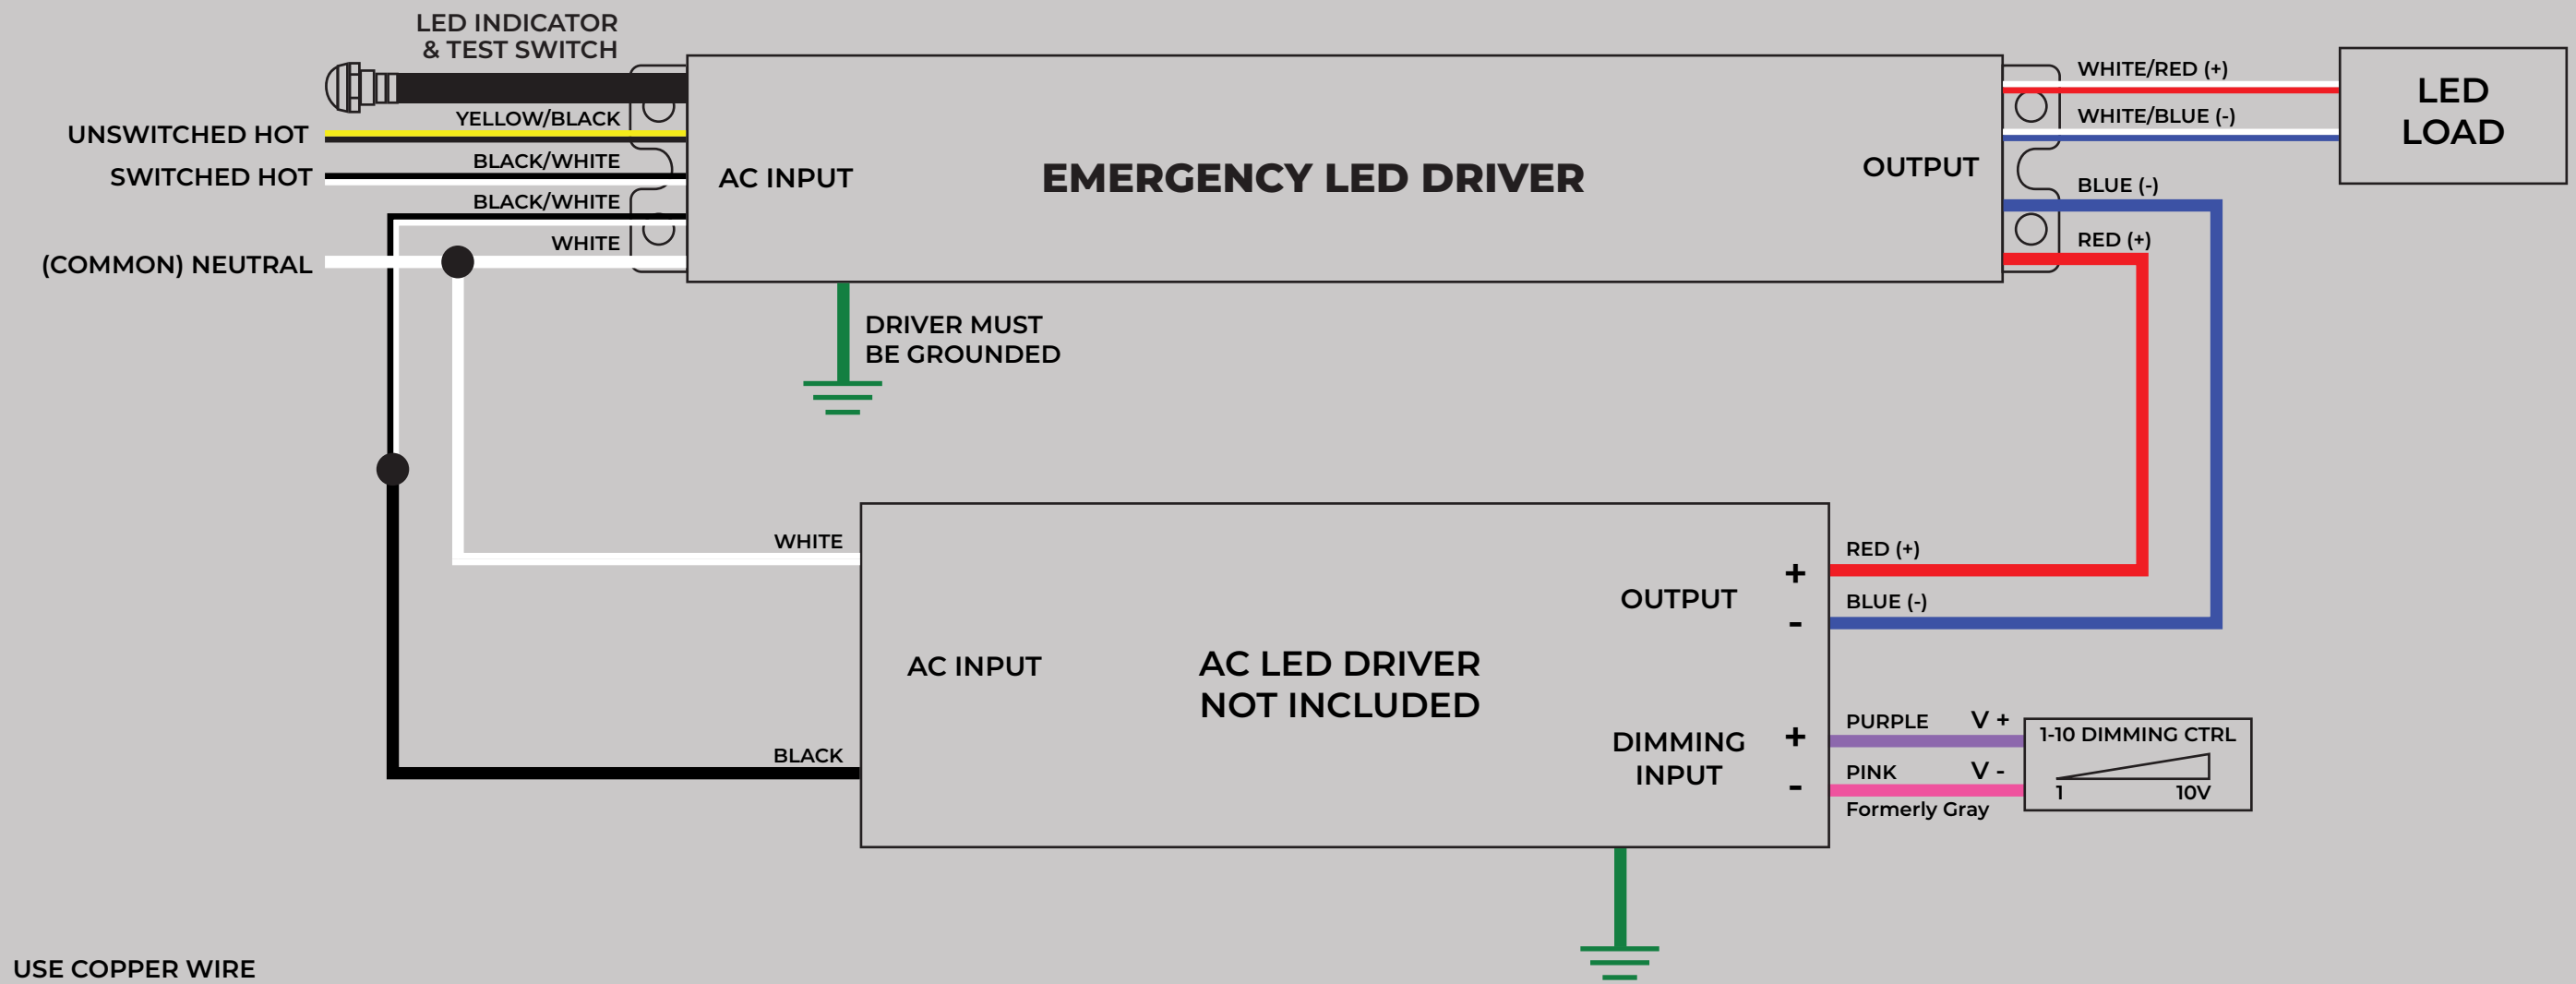

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

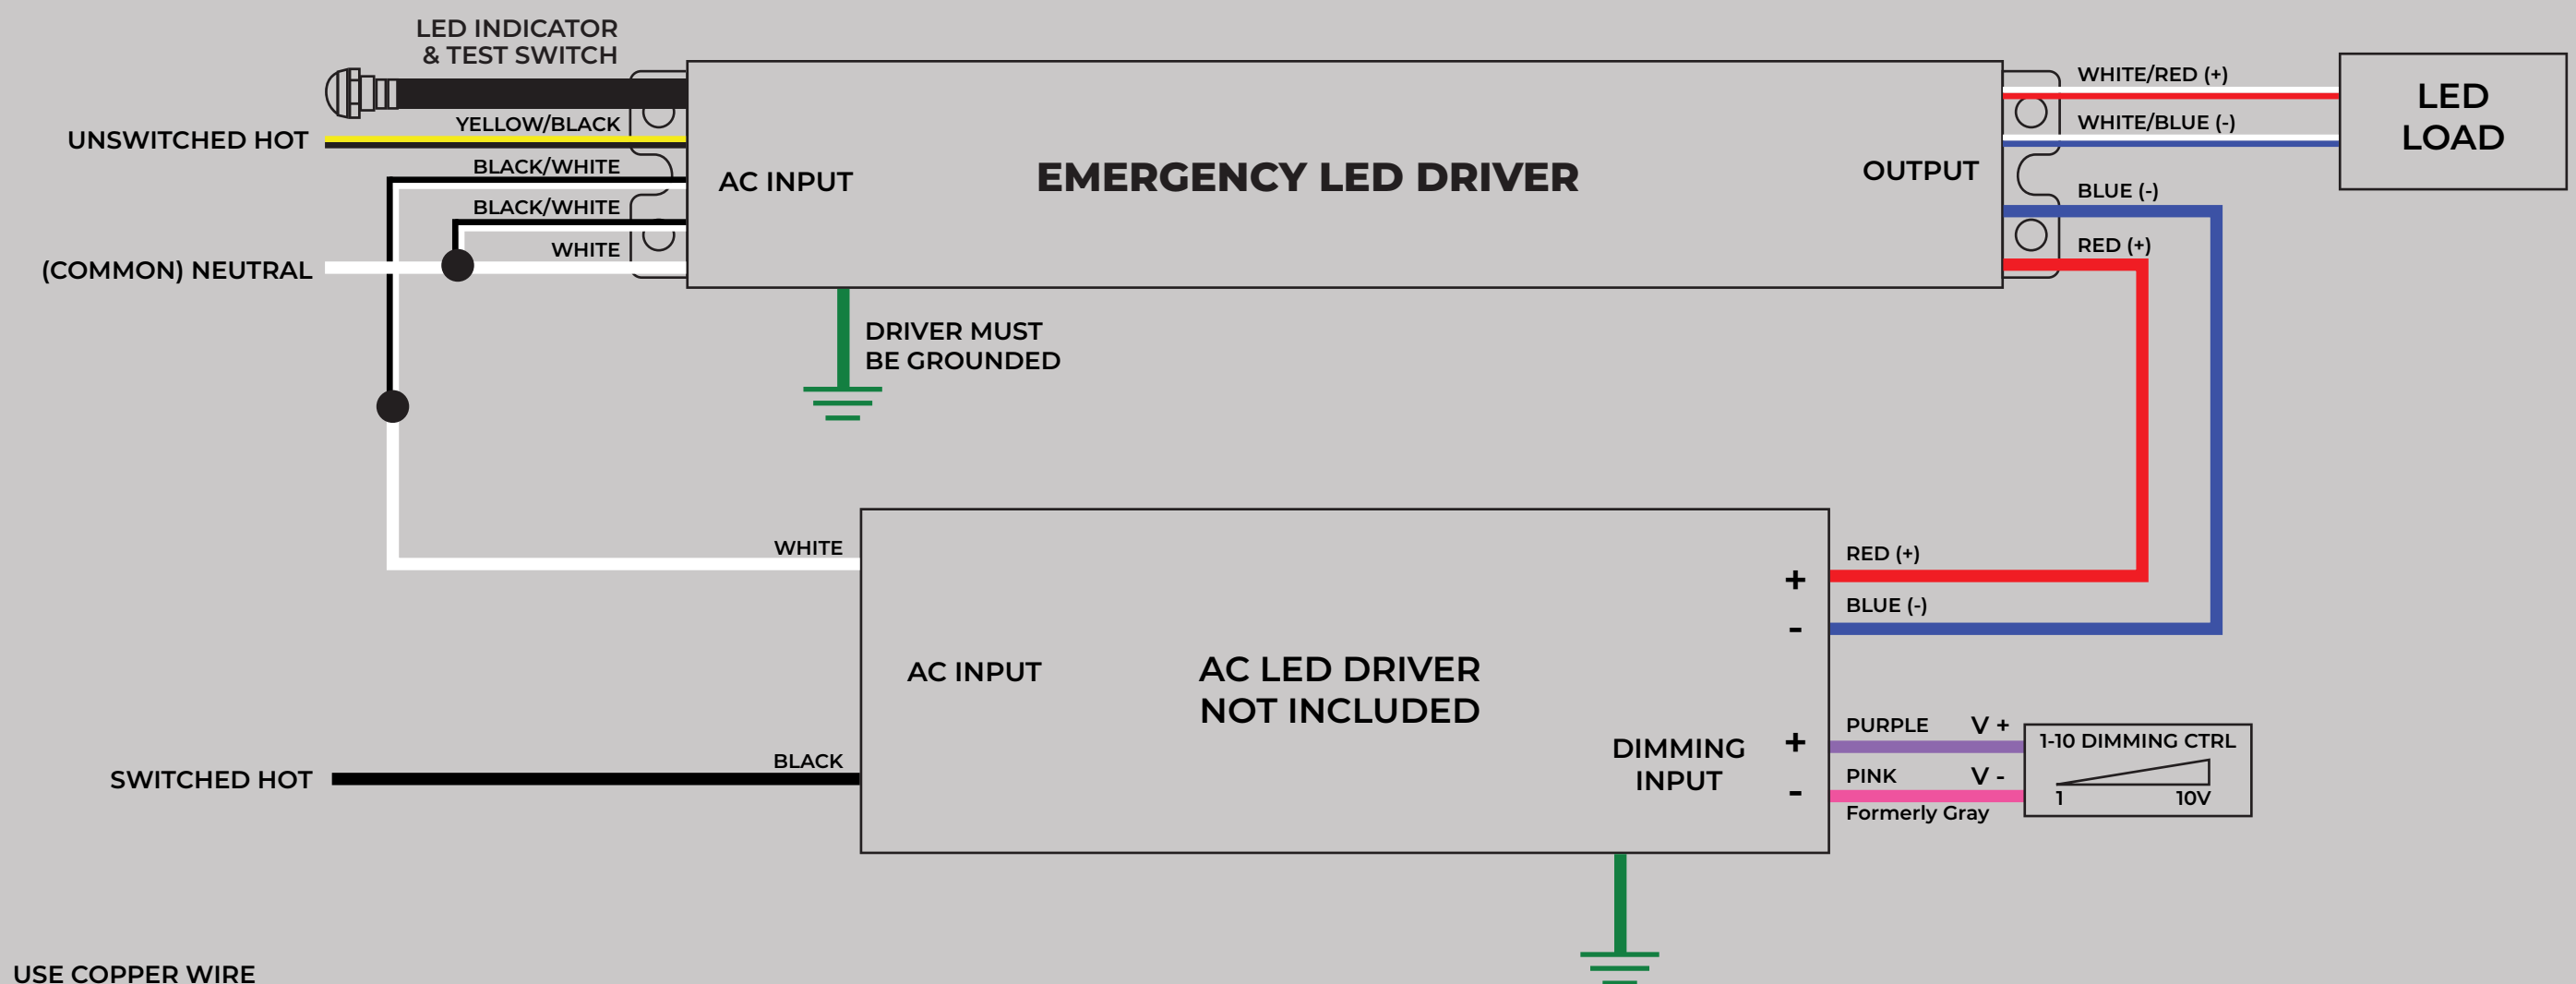


DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPG10MT1555CP COLD START EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 15-55 V
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 7.2 V
- Battery Charge Current: 500 mA

- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: -20-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

MiniTitan
Cold Start
POWER

TAA
COMPLIANT

UL
E856, LISTED & POWERED
E856705


CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AM251

ACE LEDS
800-375-6355

USE COPPER WIRE

BATTERY MUST BE CHARGED
12 MOS FROM MFG DATE

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

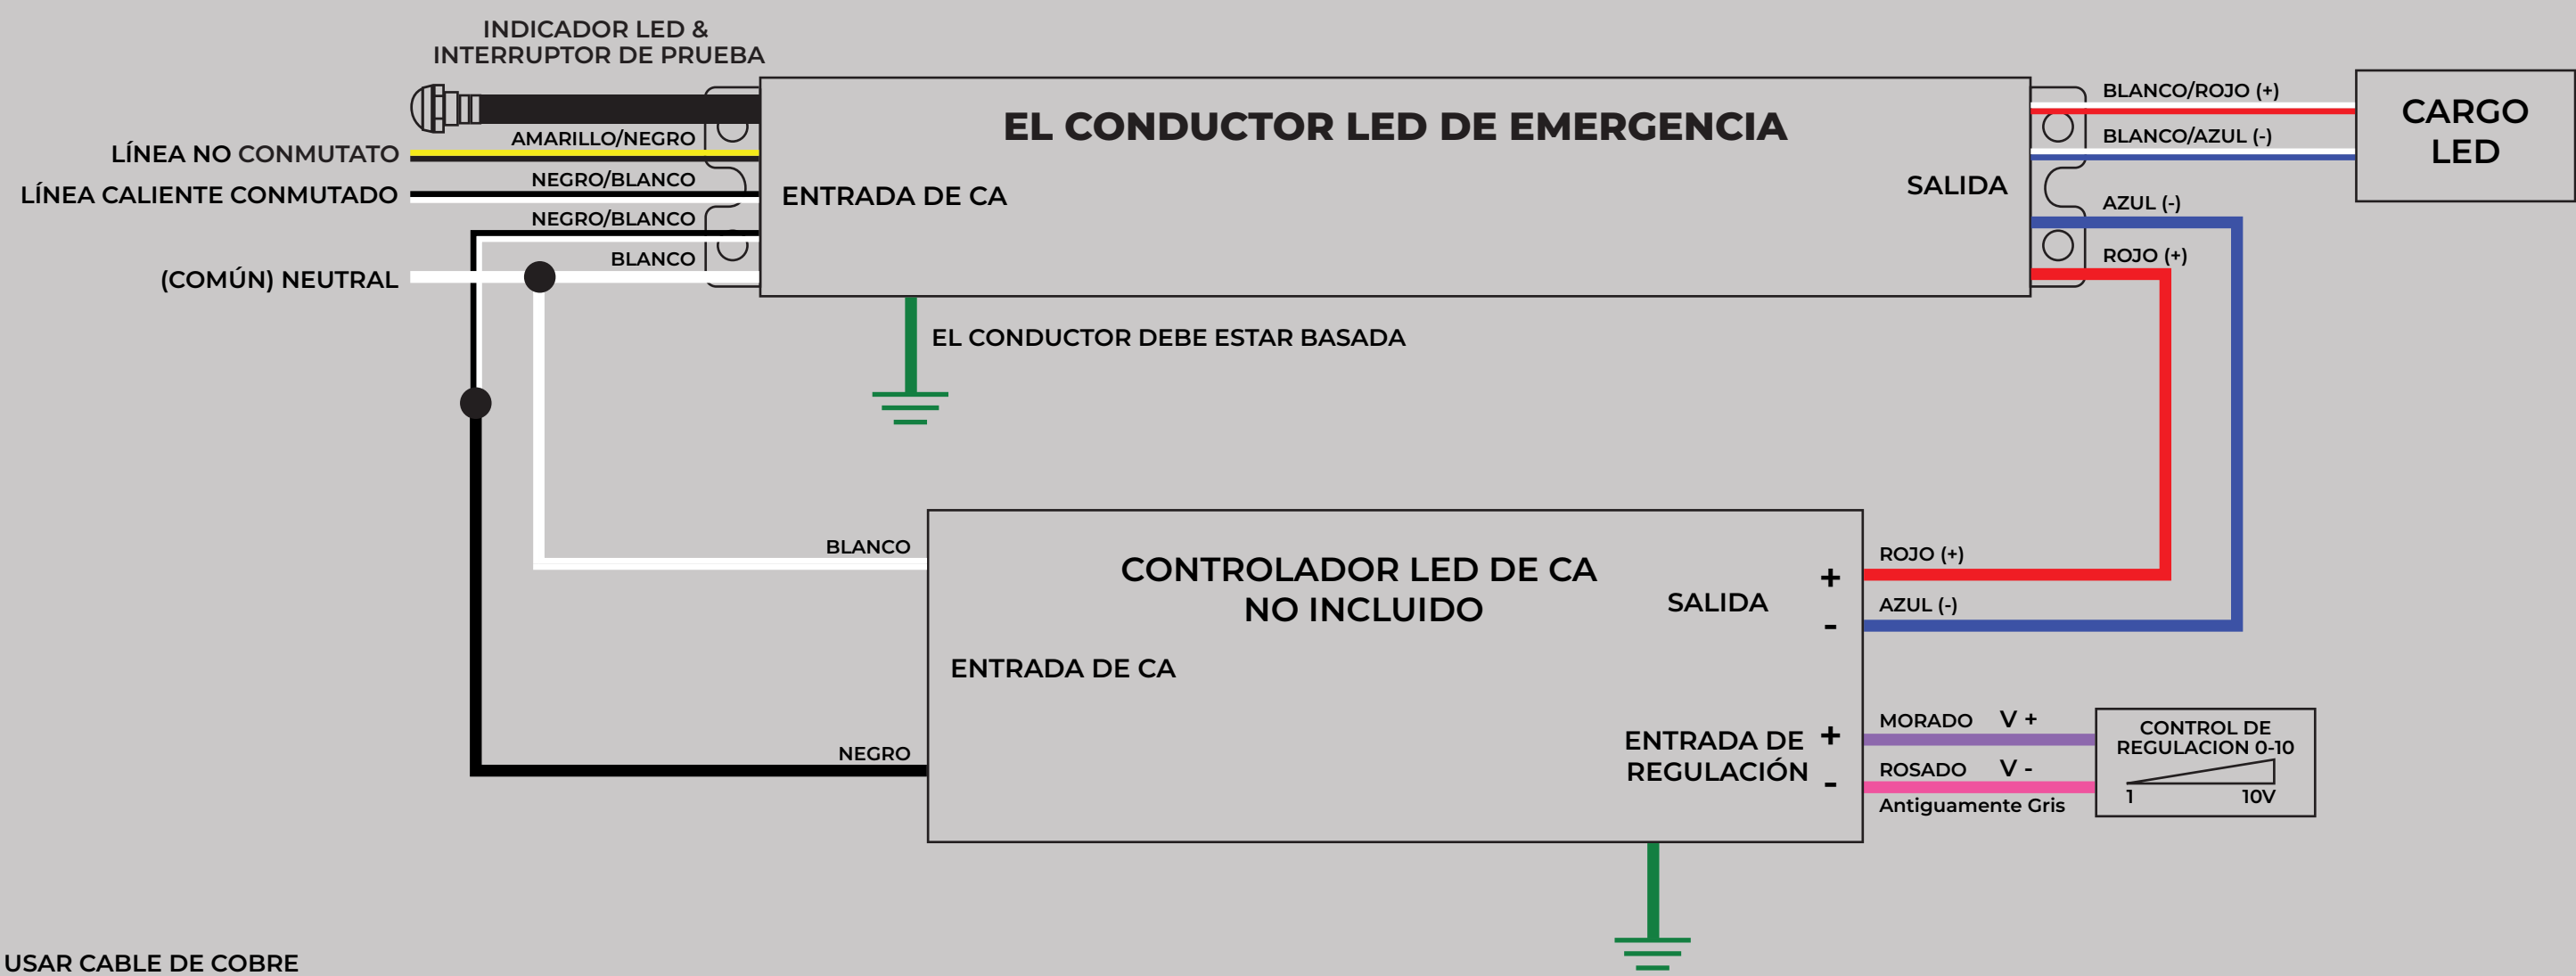

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

