

ENGLISH WIRING DIAGRAM

ACEPG7NT21555CP 2-HOUR EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 18-55 V
- Output Current: 127 mA - 467 mA

- Output Power: 7 W
- Battery Voltage: 7.2 V
- Battery Charge Current: 500 mA
- Battery Charge Time (min): 24 Hours
- Operating Duration (min): 120 Minutes

- Ambient Temperature: -20 ~ 55°C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit, BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air handling or heated air outlets.

POWER

C-Id Start

UL

ETL

CE

TAA

CSA C22.2 No. 141,
Emergency Lighting Equipment
Apparatus (Éclairage de secours)


Made in Taiwan - AM222

USE COPPER WIRE

ACE LEDS

800-375-6355

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

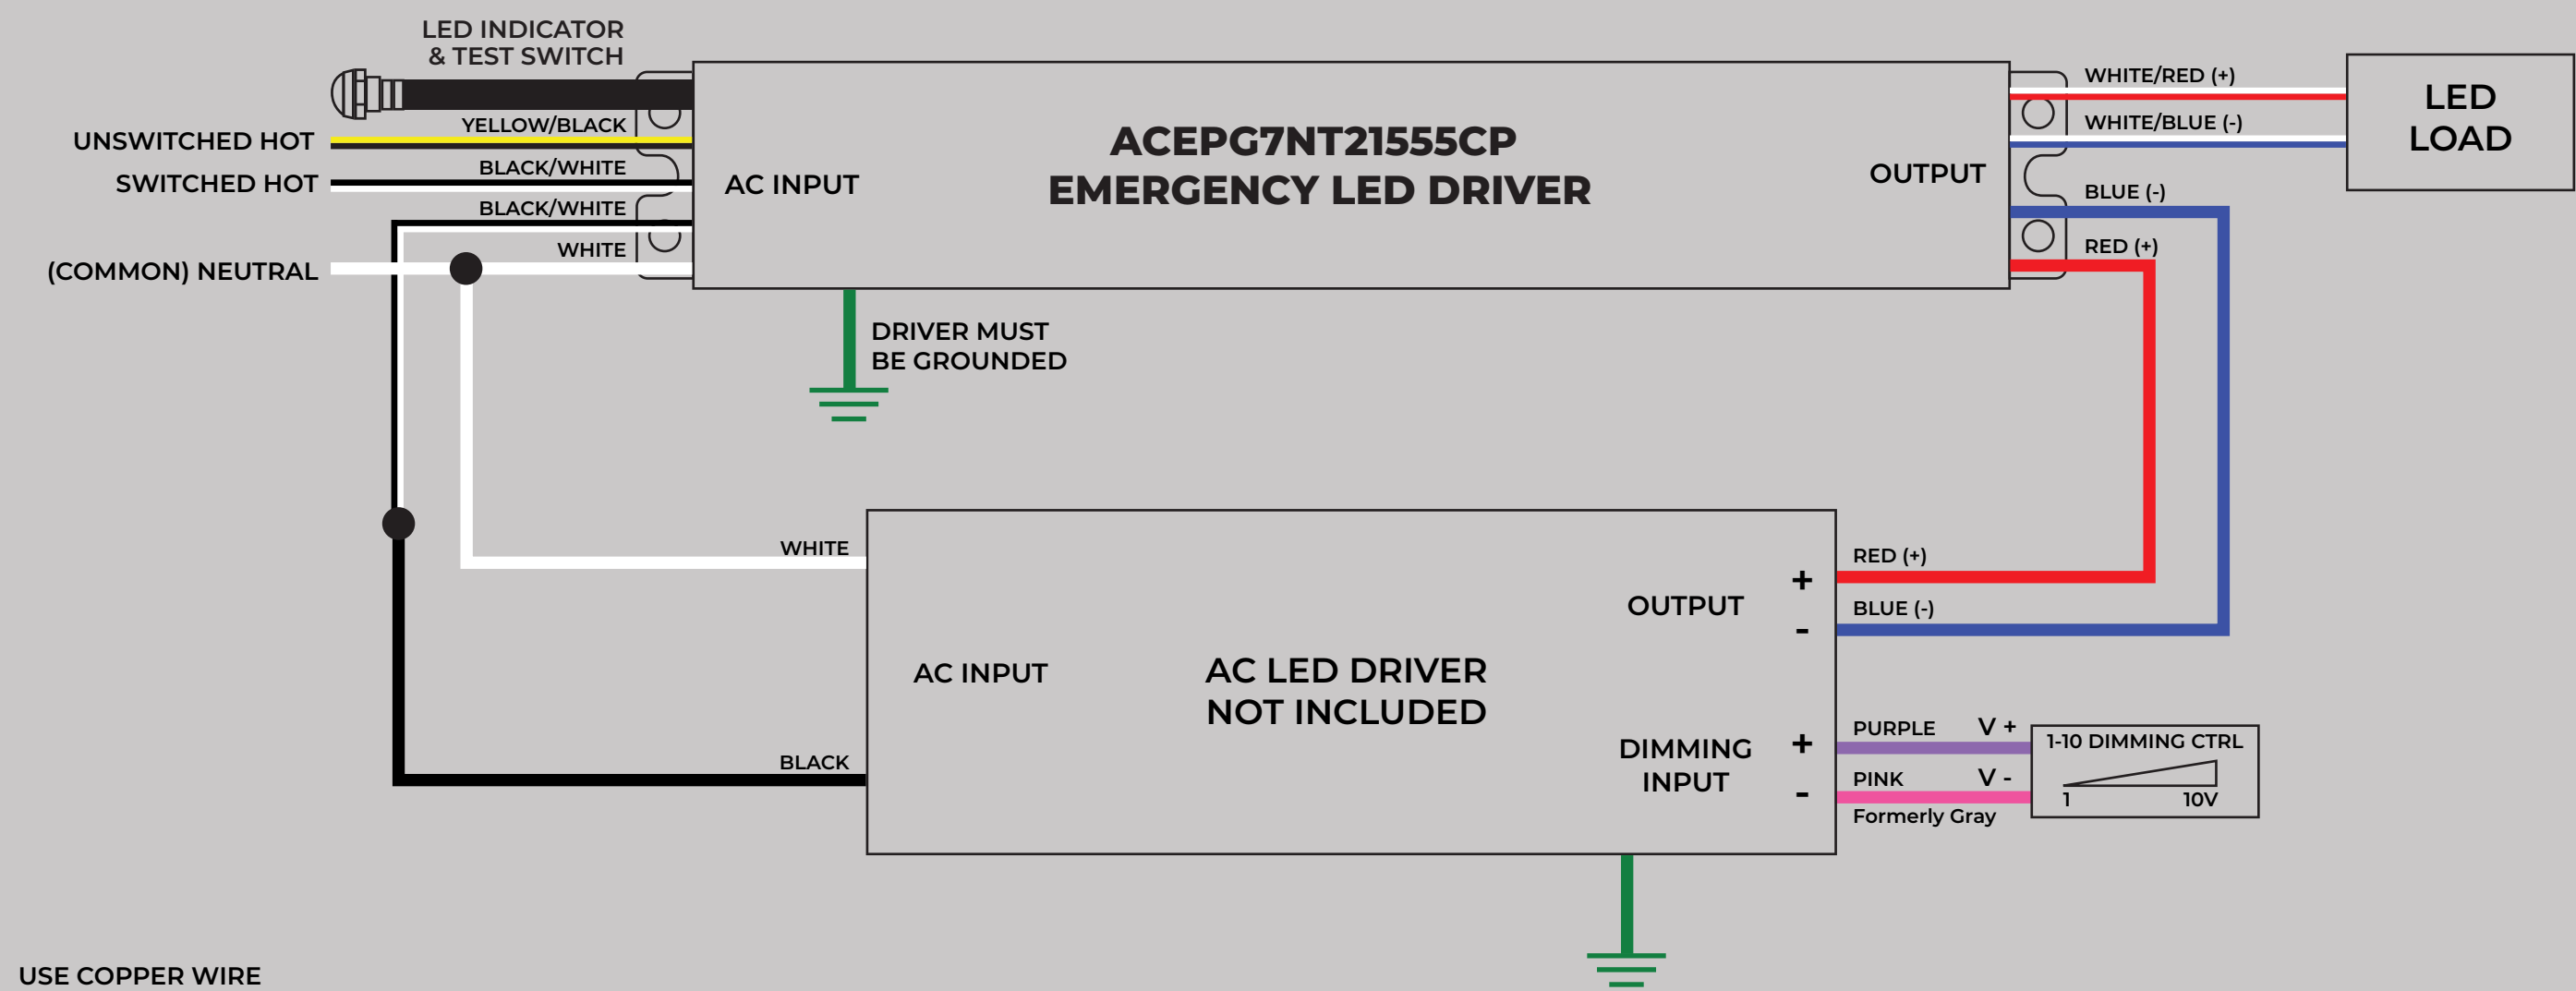

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

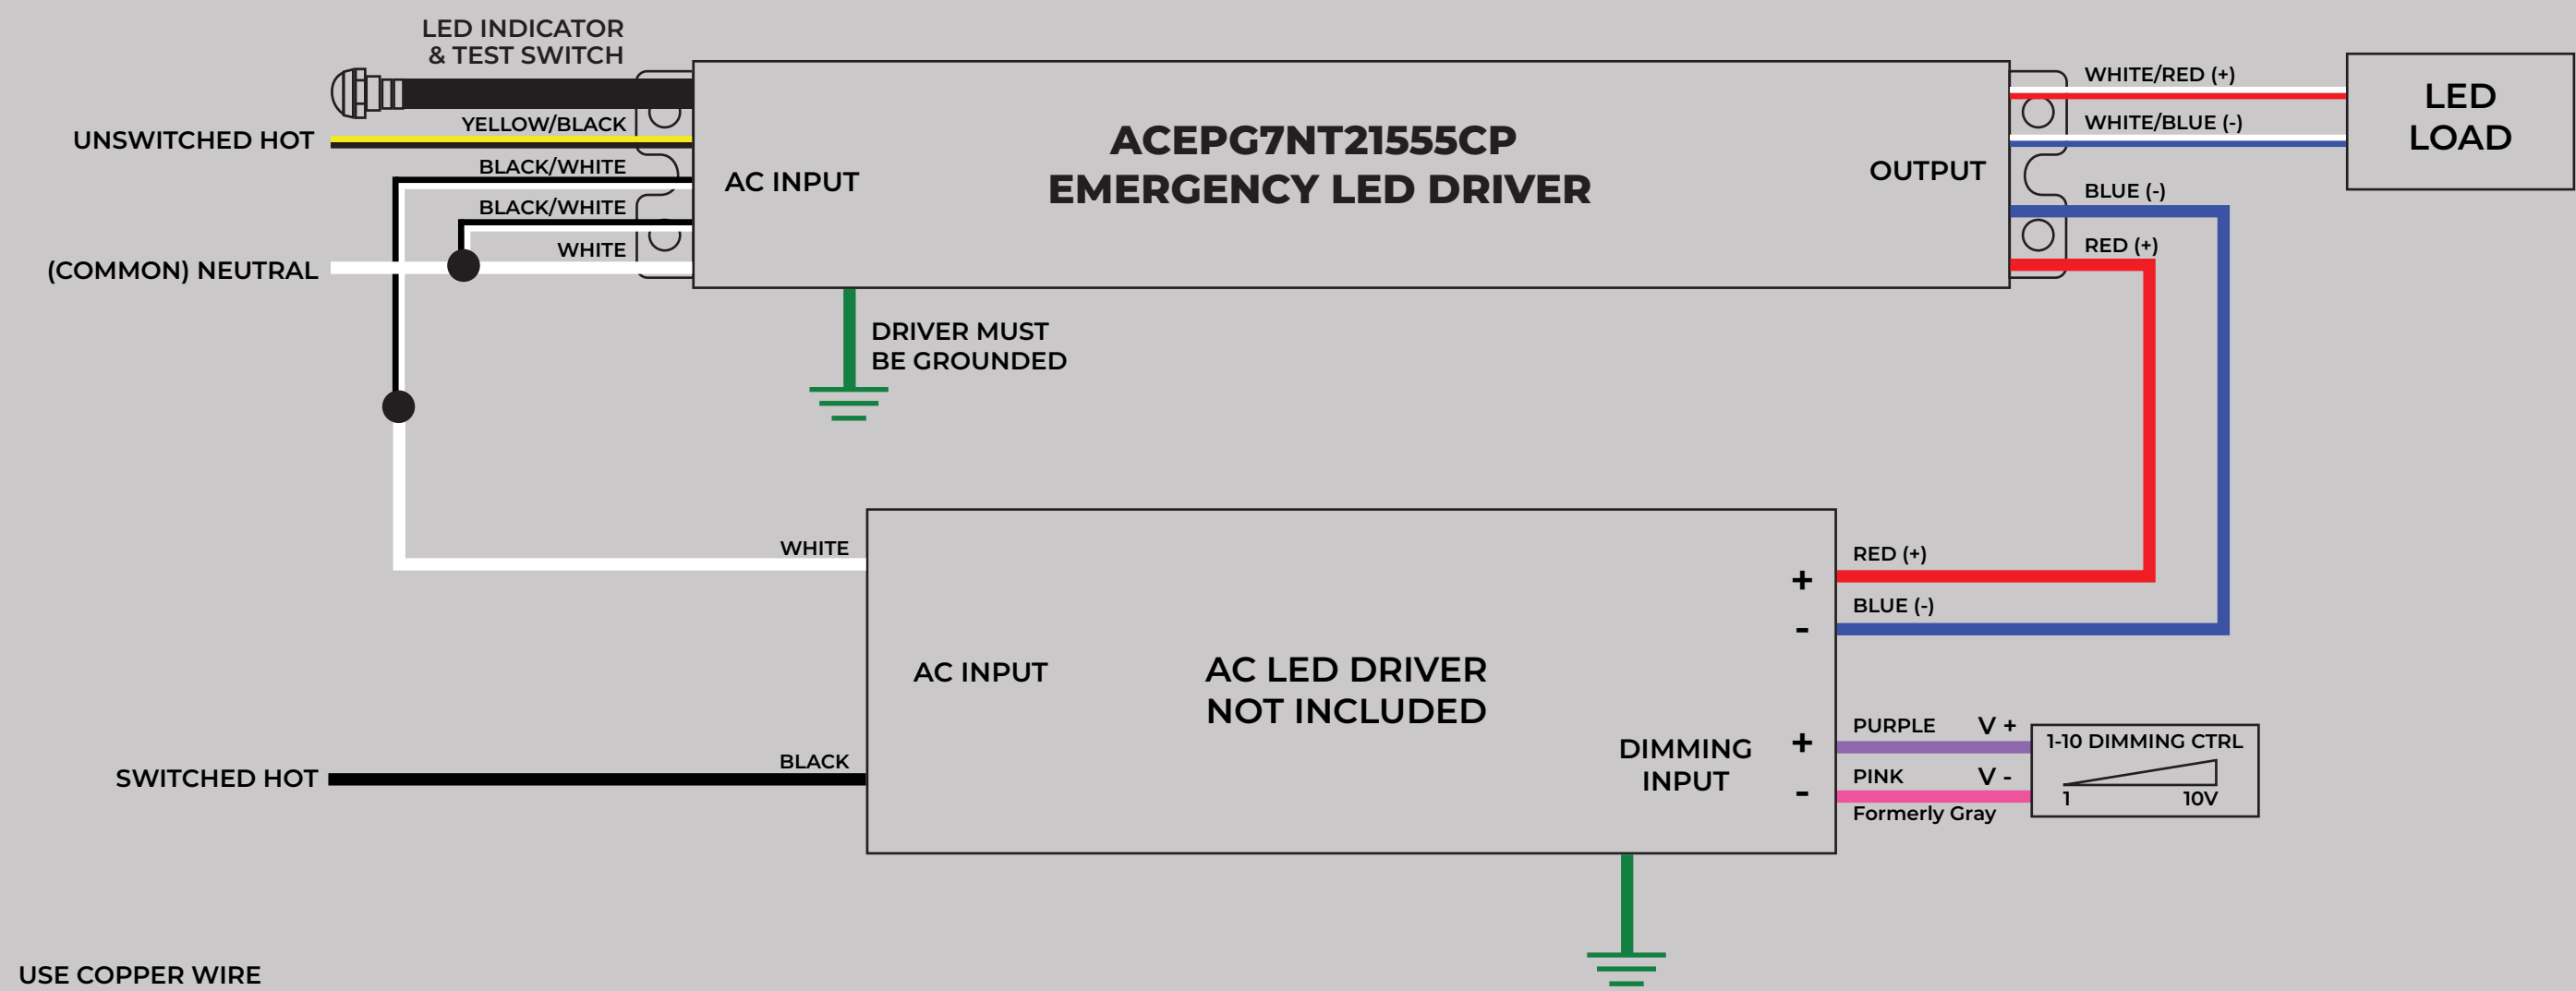


DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPG7NT21555CP 2-HOUR EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 18-55 V
- Output Current: 127 mA - 467 mA
- Output Power: 7 W
- Battery Voltage: 7.2 V
- Battery Charge Current: 500 mA
- Battery Charge Time (min): 24 hours
- Operating Duration (min): 120 Minutes
- Ambient Temperature: -20 ~ 55° C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air handling or heated air outlets.

POWER

C-Id Start

TAA

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours


Made in Taiwan - AM222

USE COPPER WIRE

ACE LEDS

800-375-6355

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

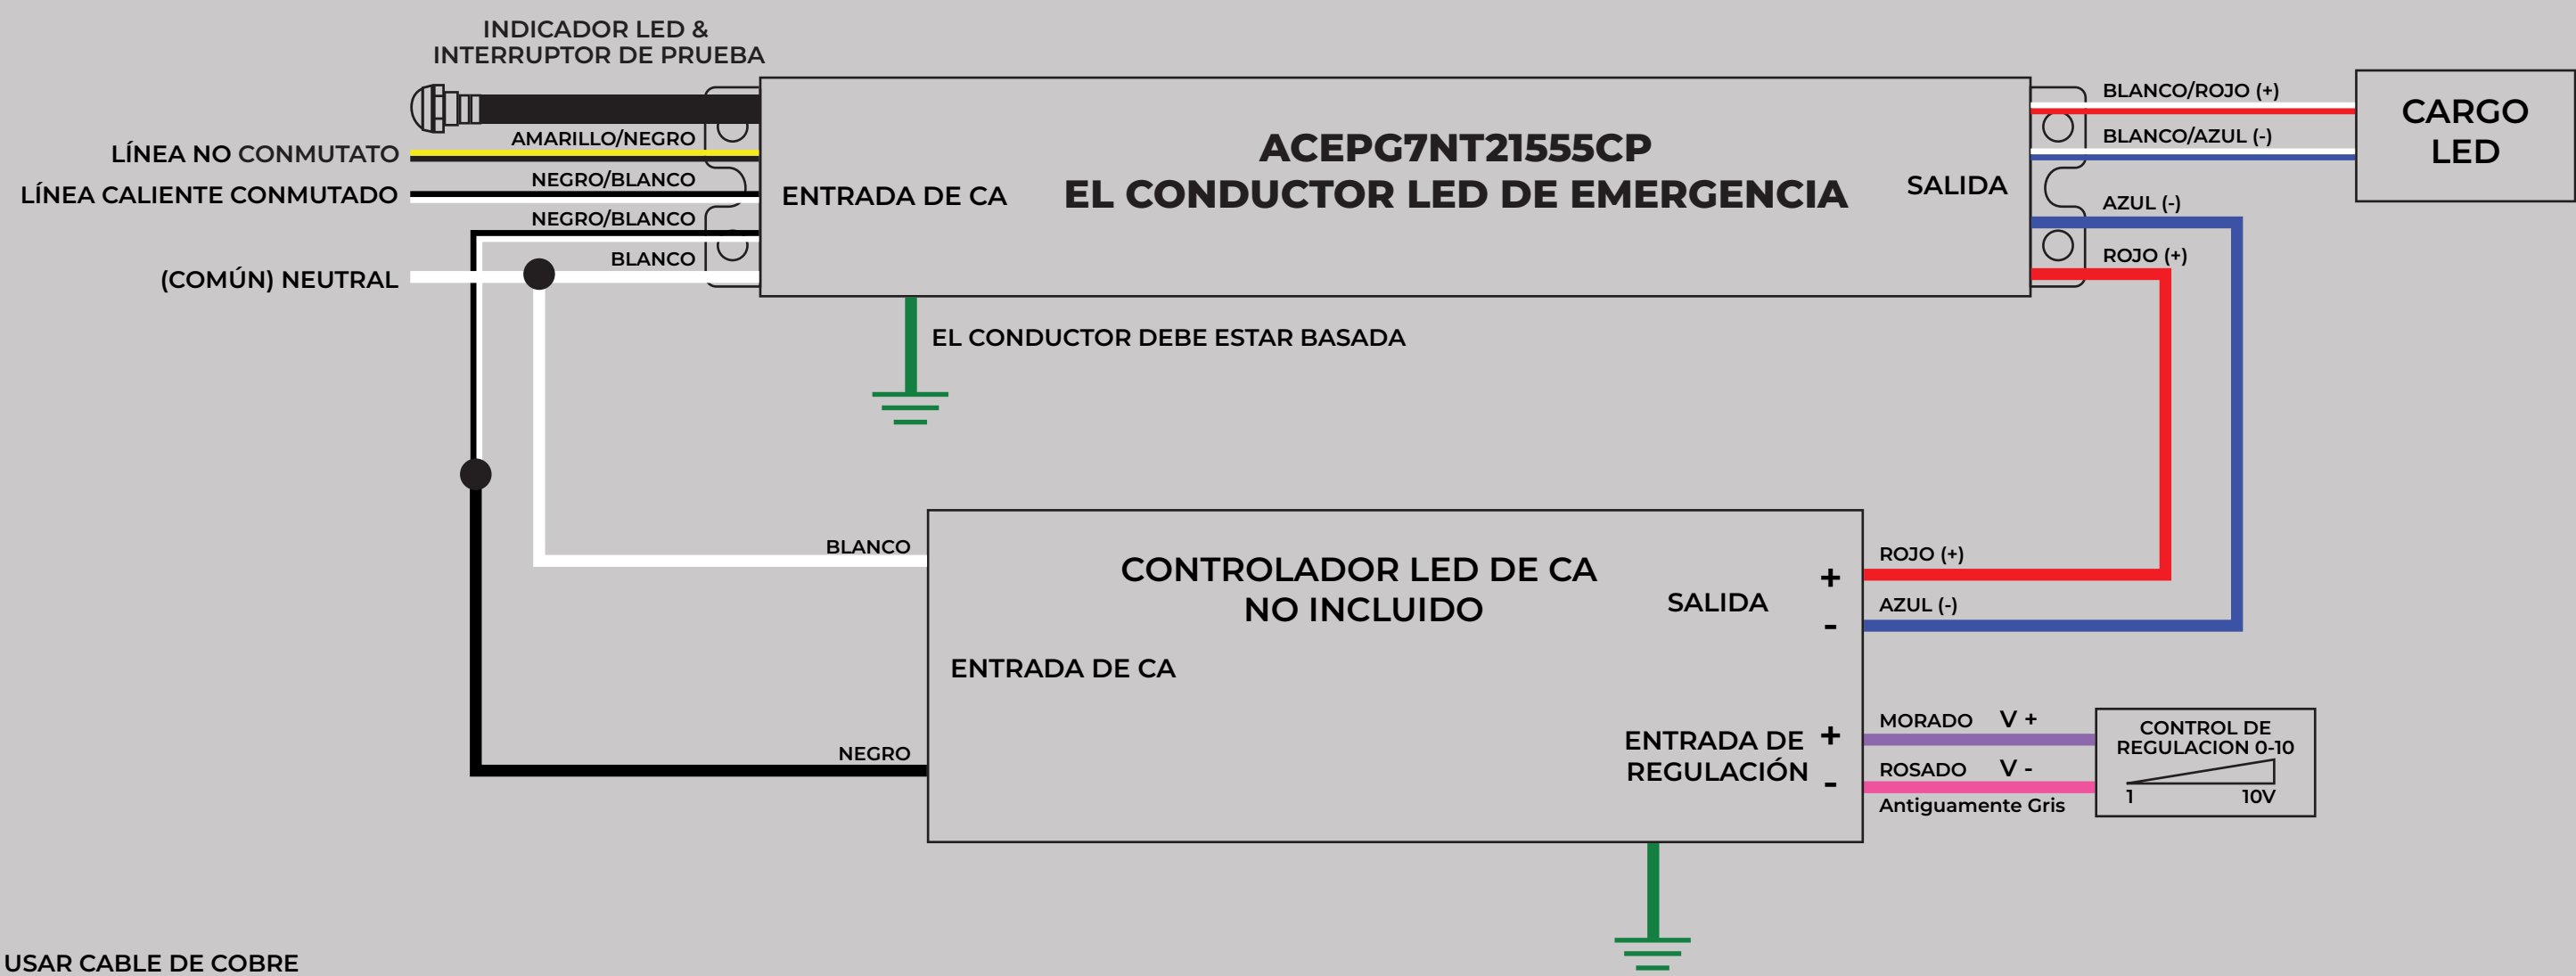

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

