

ENGLISH WIRING DIAGRAM

ACEPX10MT1555CP
EMERGENCY LED DRIVER
DC-DC CONVERTER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 15-55 V
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 7.2 V

- Ambient Temperature: -20 to 55°C
- Battery Charge Current: 500 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION:
See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Shaded unit: BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION:
Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

CSA C22.2 No. 141
Emergency Lighting Equipment
Approved Evaluation de sécurité
Made in Taiwan - AMT11

OC
ACE LEDS

ACEPX10MT1555CP
EMERGENCY LED DRIVER
Lithium-ion, 7.2 V, 5000 mAh


- Battery Voltage: 7.2 V
- Battery Charge Current: 500 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min

MiniTitan POWER

BATTERY MUST BE CHARGED
12 MOS FROM MFG DATE

800-375-6355
Made in Taiwan - AM272

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

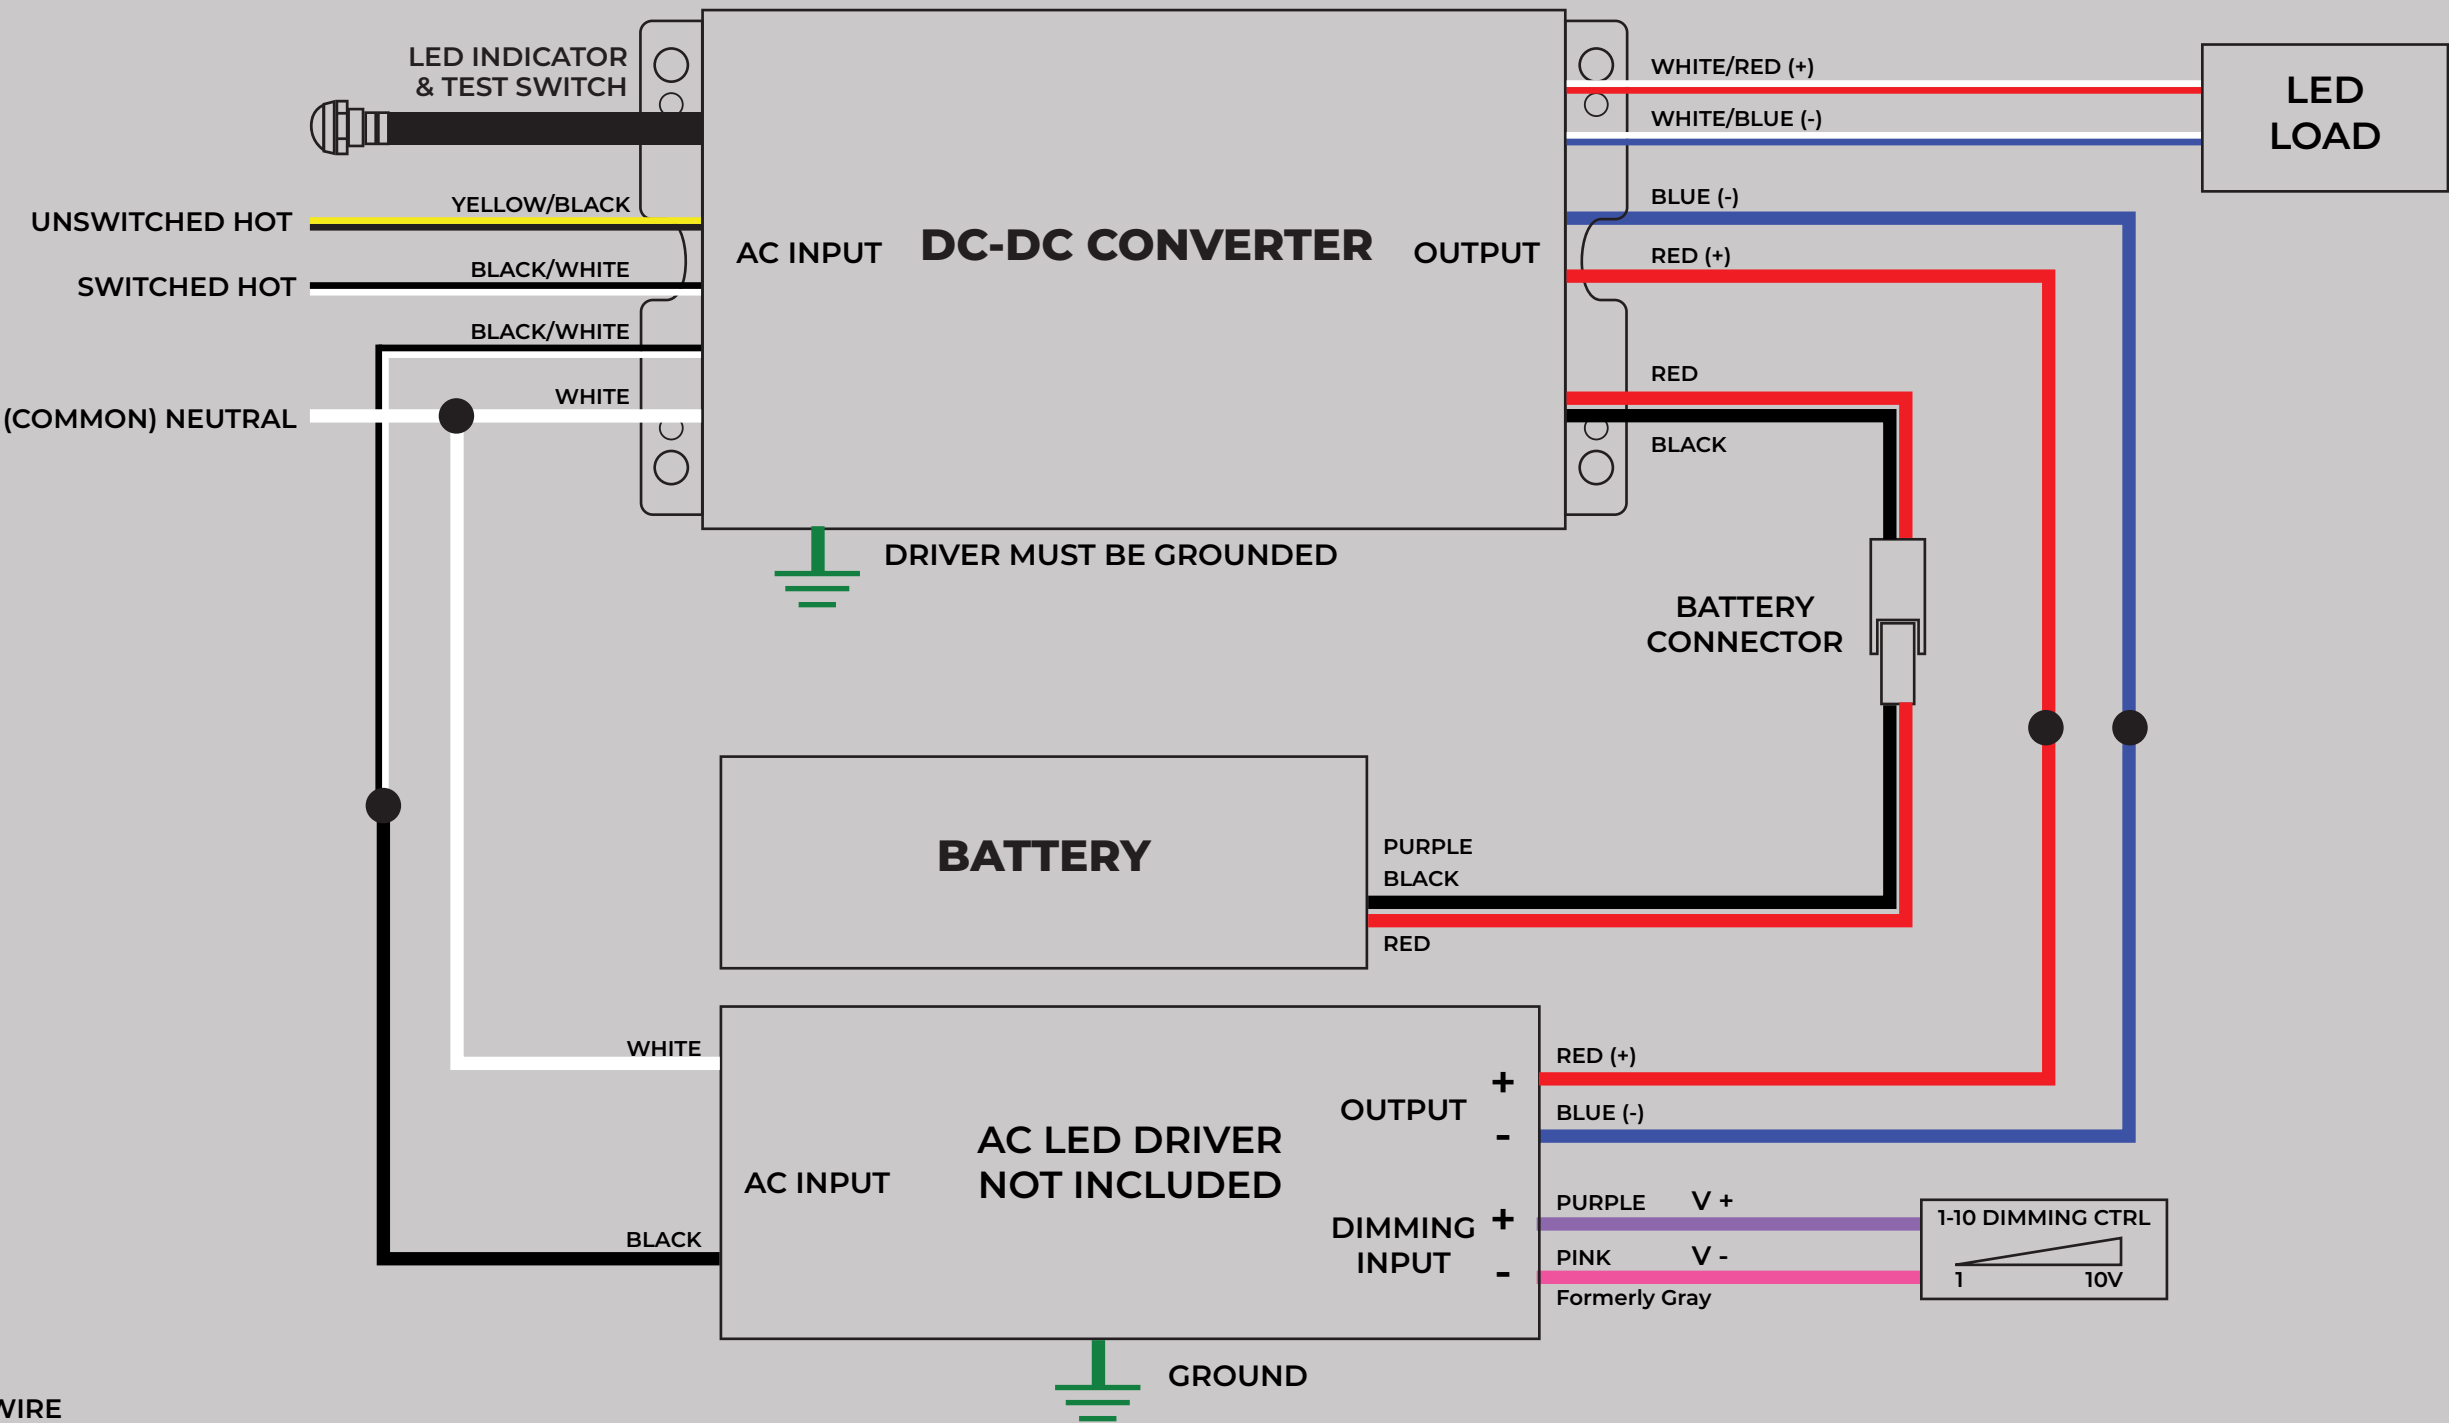

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

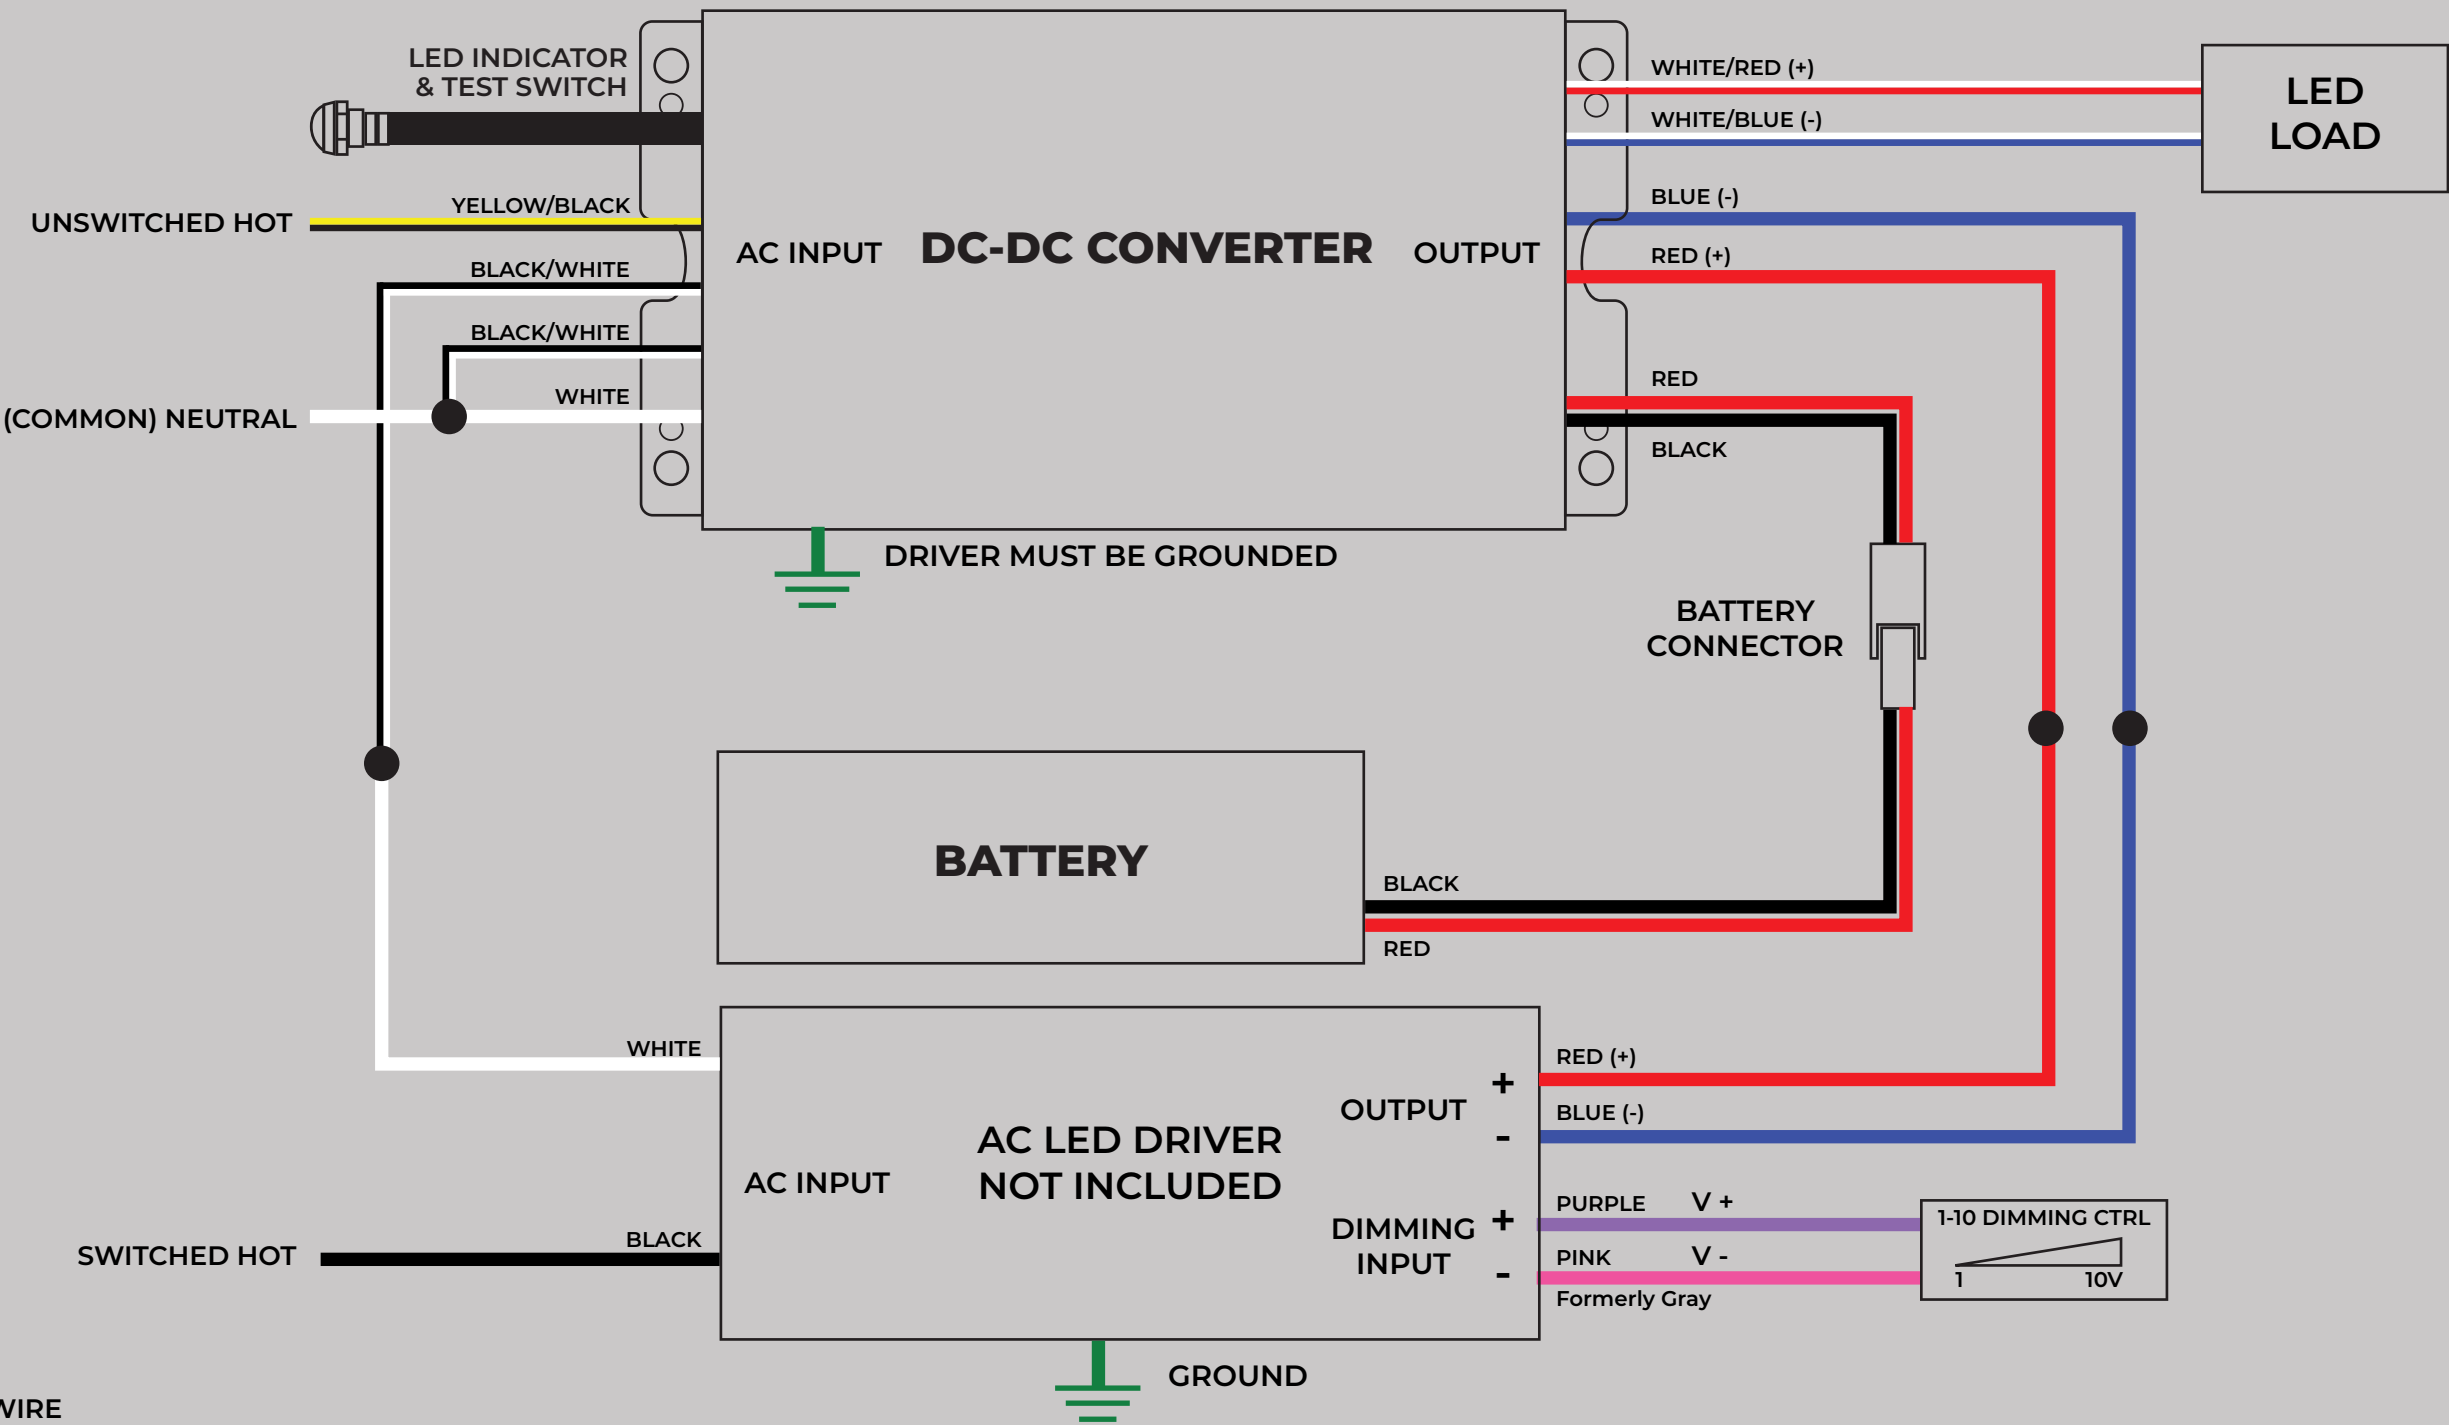


DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPX10MT1555CP
EMERGENCY LED DRIVER
DC-DC CONVERTER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 15-55 V
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 7.2 V

CAUTION:
See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Shaded unit: BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION:
Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

CSA C22.2 No. 141,
Emergency Lighting Equipment
Assessé conforme de normes
Made in Taiwan - AM272

• Ambient Temperature: -20 to 55°C

- Battery Charge Current: 500 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

MiniTitan POWER

ACEPX10MT1555CP BATTERY
EMERGENCY LED DRIVER
Lithium-ion, 7.2 V, 5000 mAh

- Battery Voltage: 7.2 V
- Battery Charge Current: 500 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min


MiniTitan POWER

BATTERY MUST BE CHARGED
12 MOS FROM MFG DATE

800-375-6355

Made in Taiwan - AM272

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

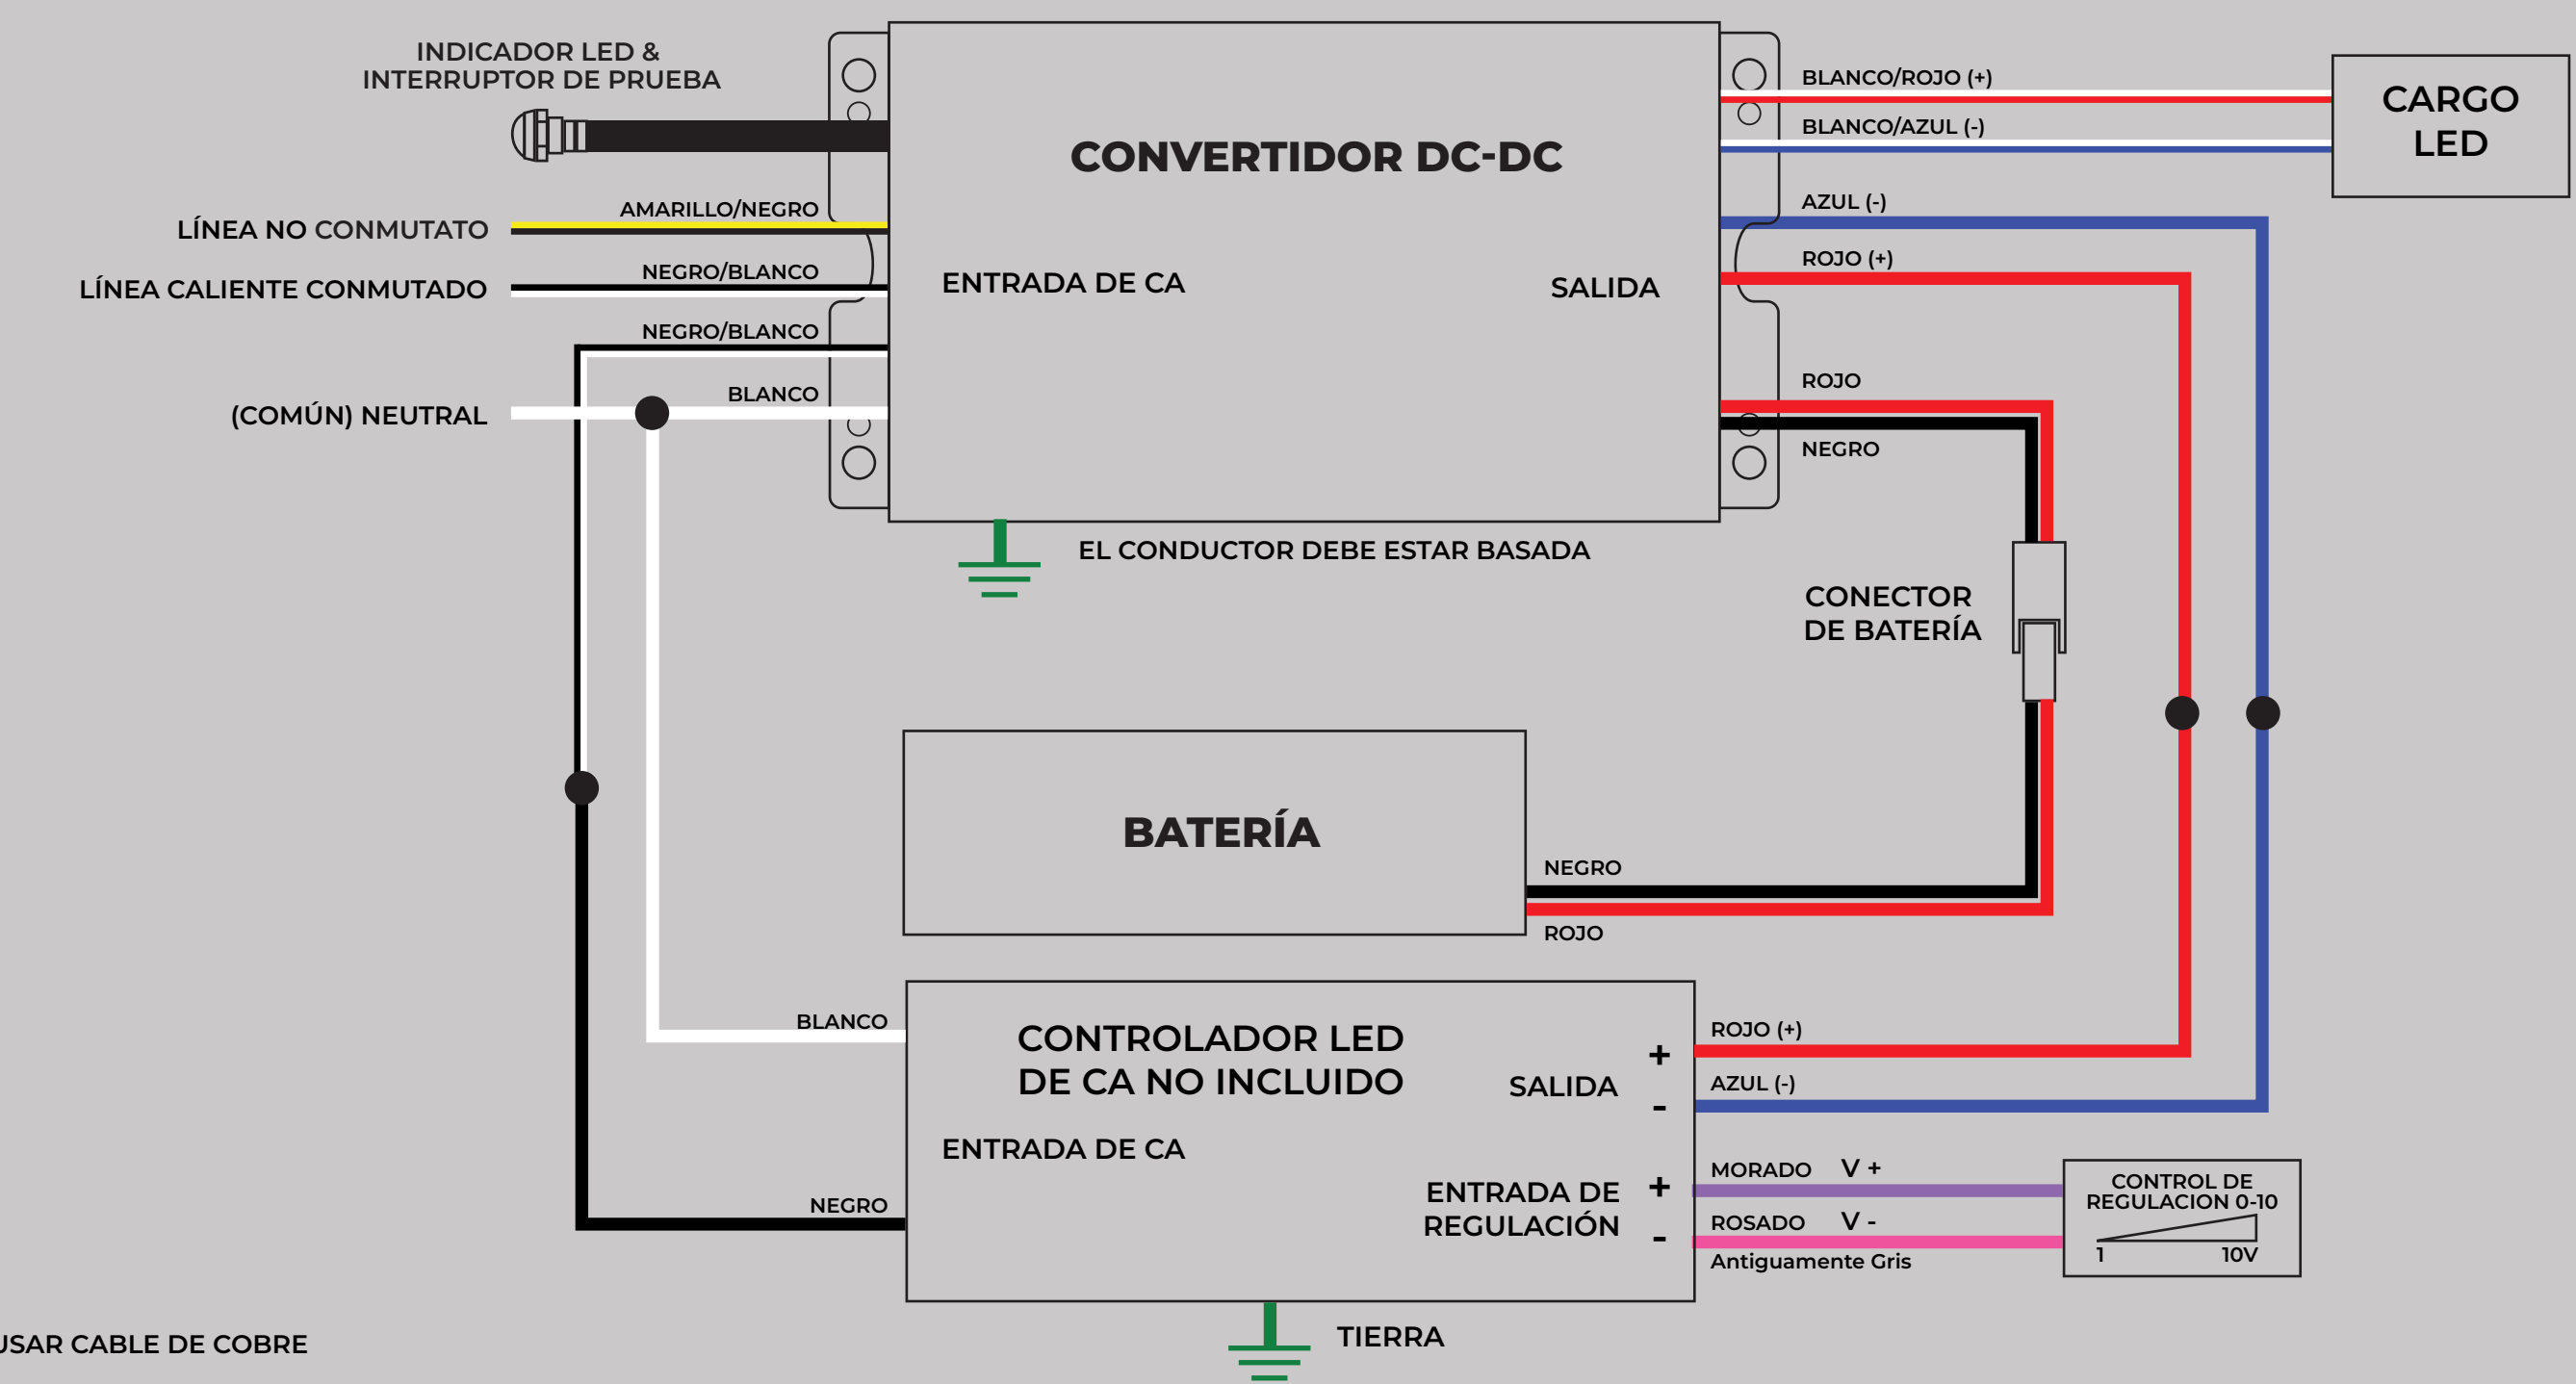

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

