

Constant Current LED Driver

**Model Number
AC-39CD700ARBHQ**


Input Voltage: 120-277V
Input Frequency: 50/60Hz
Bottom Mount/Leads

DIMMING


ELECTRICAL SPECIFICATIONS:

Output Power	Input Power	Input Current	Min PF (full load)	Max THD (full load)	Output Voltage	Output Current	T case Max	Min. Starting Temp	Efficiency Up To	Dimming Range	Dimming Protocol
39W	46W @ 120V, 46W @ 277V	0.38A @ 120V, 0.18A @ 277V	>0.95	<20%	33 to 56V	700mA±5%	90° C	-40° C	84%	10 to 100%	0 to 10V

WIRING:

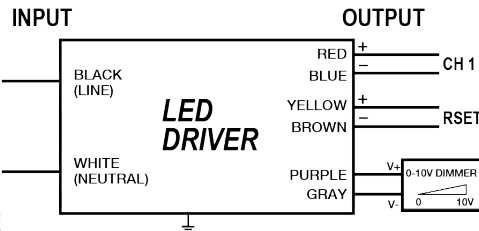

PHYSICAL:

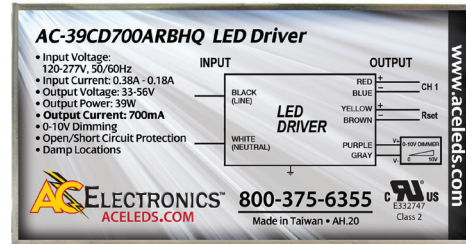

RSET TABLE

RSET (Ω)	Iout (mA)	RSET (Ω)	Iout (mA)
>1000K	700	22K	400
140K	650	20K	350
71K	600	17.5K	300
44K	550	15K	250
34K	500	14K	200
27K	450		

Lead Lengths		Brown	5.9"	Yellow	5.9"
Black	5.9"	Blue	5.9"	Purple	5.9"
White	5.9"	Red	5.9"	Gray	5.9"

Dimensions	
Length	5.3"
Width	2.9"
Height	1.18"
Weight	xx lbs.
Case Qty.	xx pcs.

SAFETY:

- UL US and cUL LVLE
- UL Outdoor Type I
- Class A sound rating
- No PCBs
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required for installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded



*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.



3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

