

ENGLISH WIRING DIAGRAM

ACEPG101555CPG EMERGENCY LED DRIVER

- Input Voltage: 347-480 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 15-55 Vdc
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 6.4 V
- Battery Charge Current: 185 mA

- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

CSA C22.2 No. 141, Emergency Lighting Equipment
Appareil d'éclairage de secours

POWER QUALITY

UL LISTED
EMERGENCY LED DRIVER


TAA
COMPLIANT

ACE LEDS

800-375-6355
Made in Taiwan - AM251

USE COPPER WIRE

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

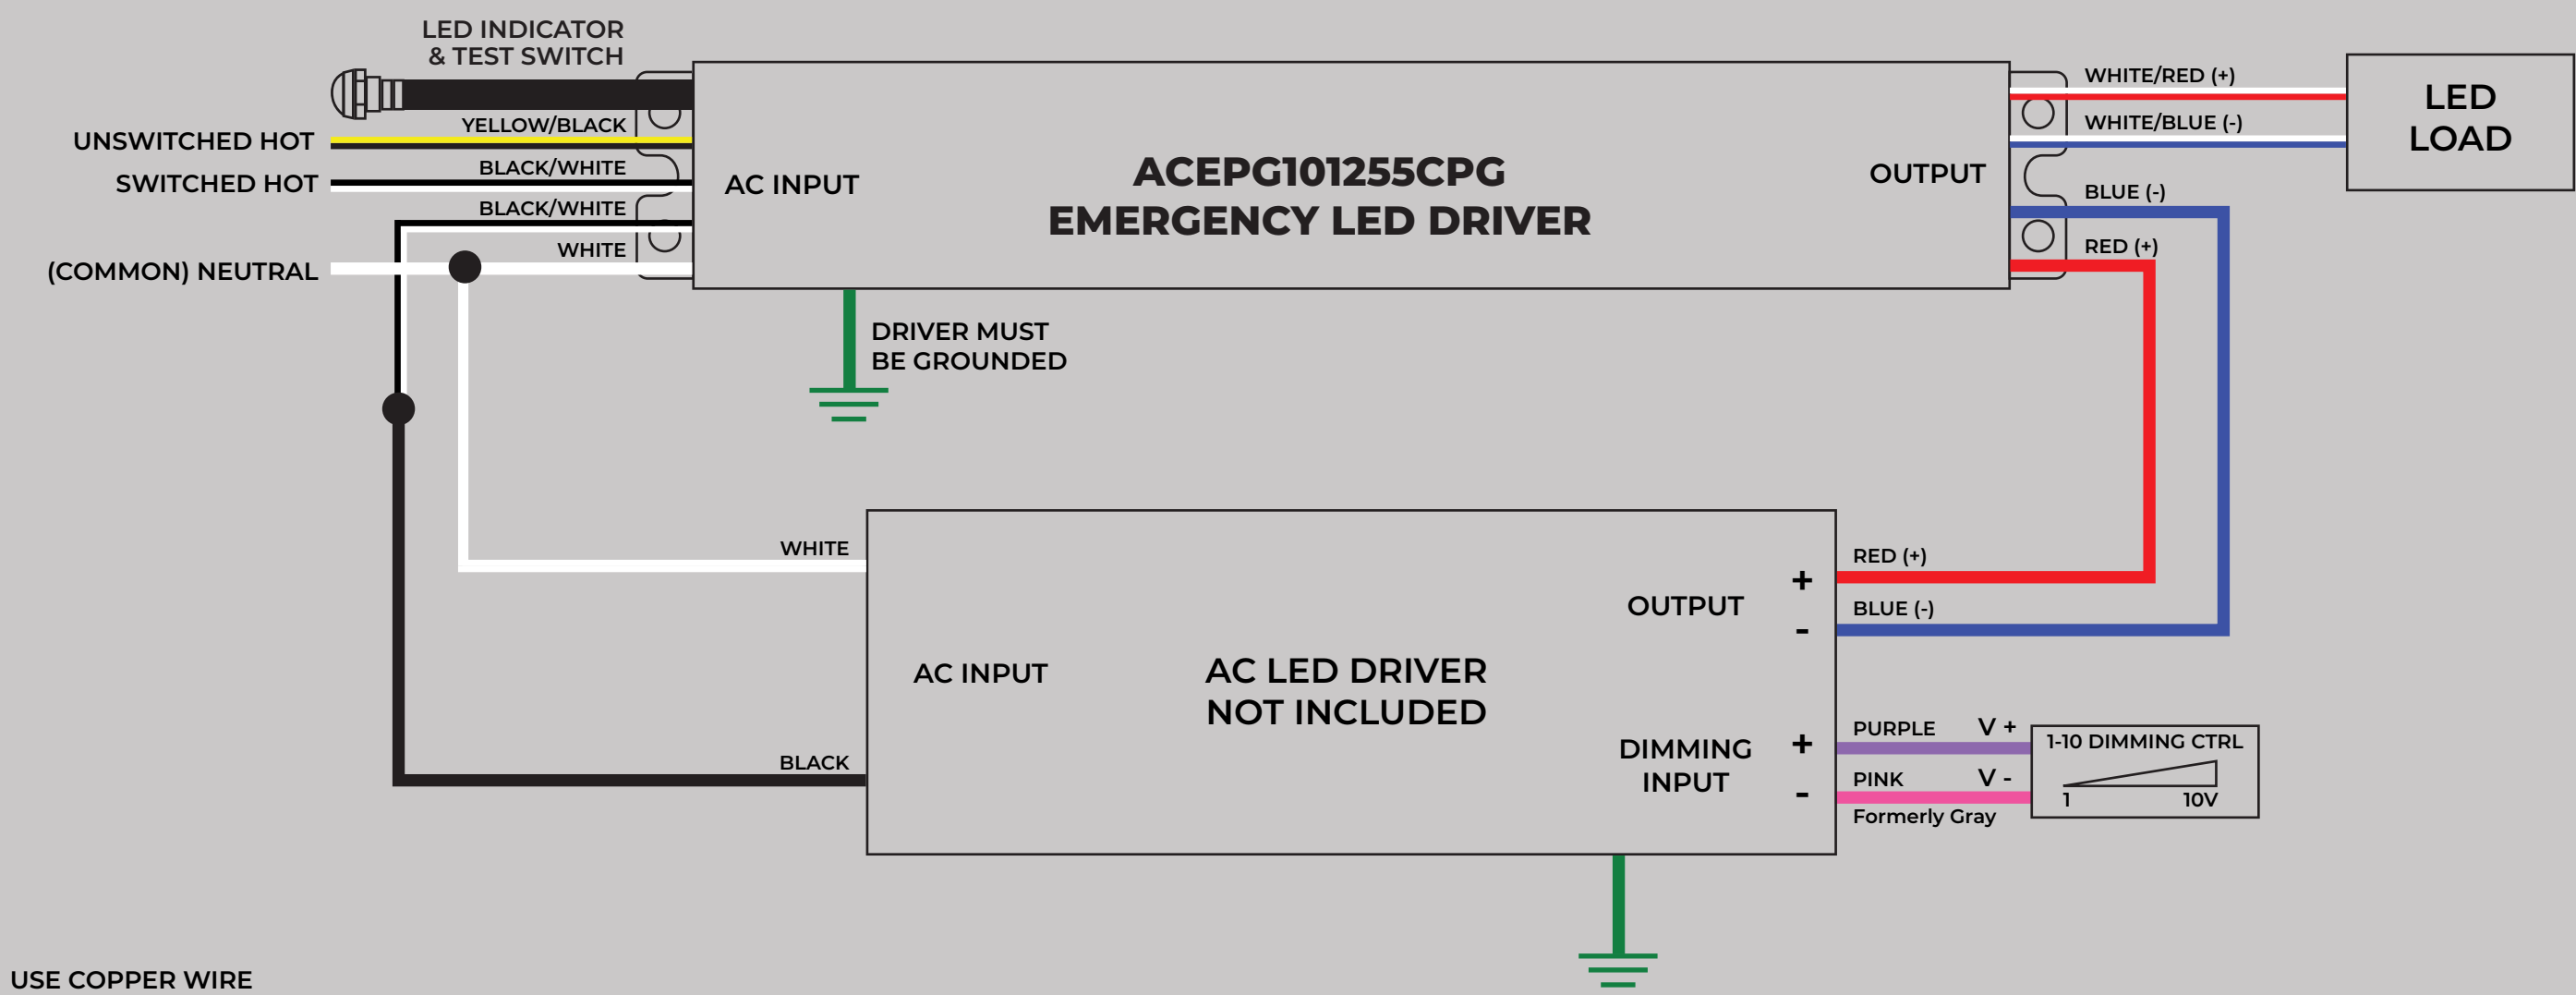

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

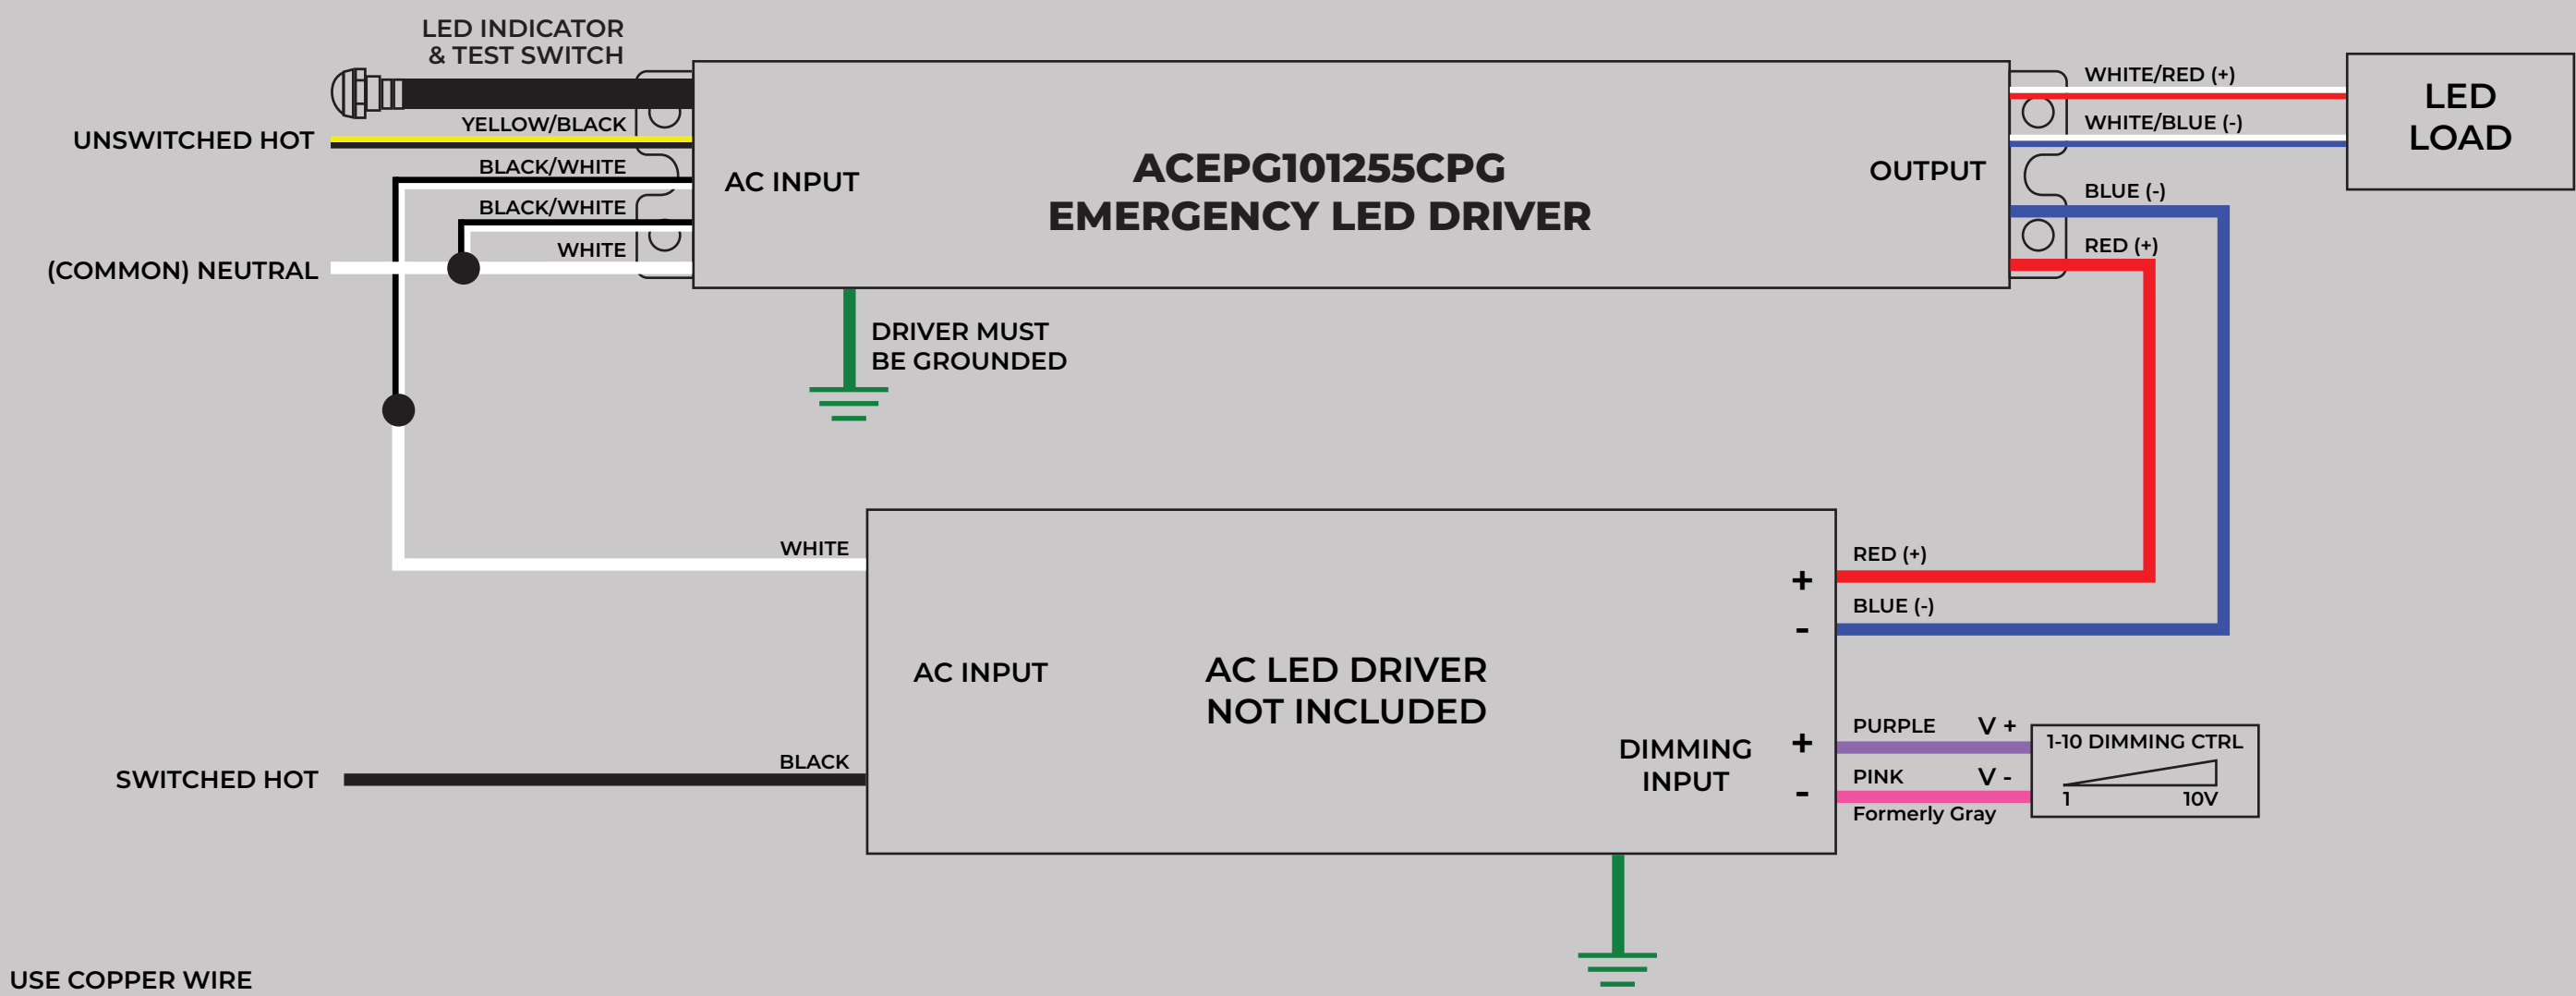


DIAGRAMA DE CABLEADO
ESPAÑOL

ACEPG101555CPG EMERGENCY LED DRIVER

- Input Voltage: 347-480 V, 50/60 Hz
- Input Current (max): 110 mA
- Input Power: 8 W
- Output Voltage: 15-55 Vdc
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 6.4 V
- Battery Charge Current: 185 mA

USE COPPER WIRE

ACEPG101255CPG EL CONDUCTOR LED DE EMERGENCIA

ENTRADA DE CA

SALIDA

BLANCO/ROJO (+)

BLANCO/AZUL (-)

AZUL (-)

ROJO (+)

ROJO (+)

AZUL (-)

MORADO V +

ROSADO V -

Antiguamente Gris

CONTROL DE REGULACION 0-10

1 10V

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours

POWER


UL

TAA

800-375-6355

Made in Taiwan - AM251

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

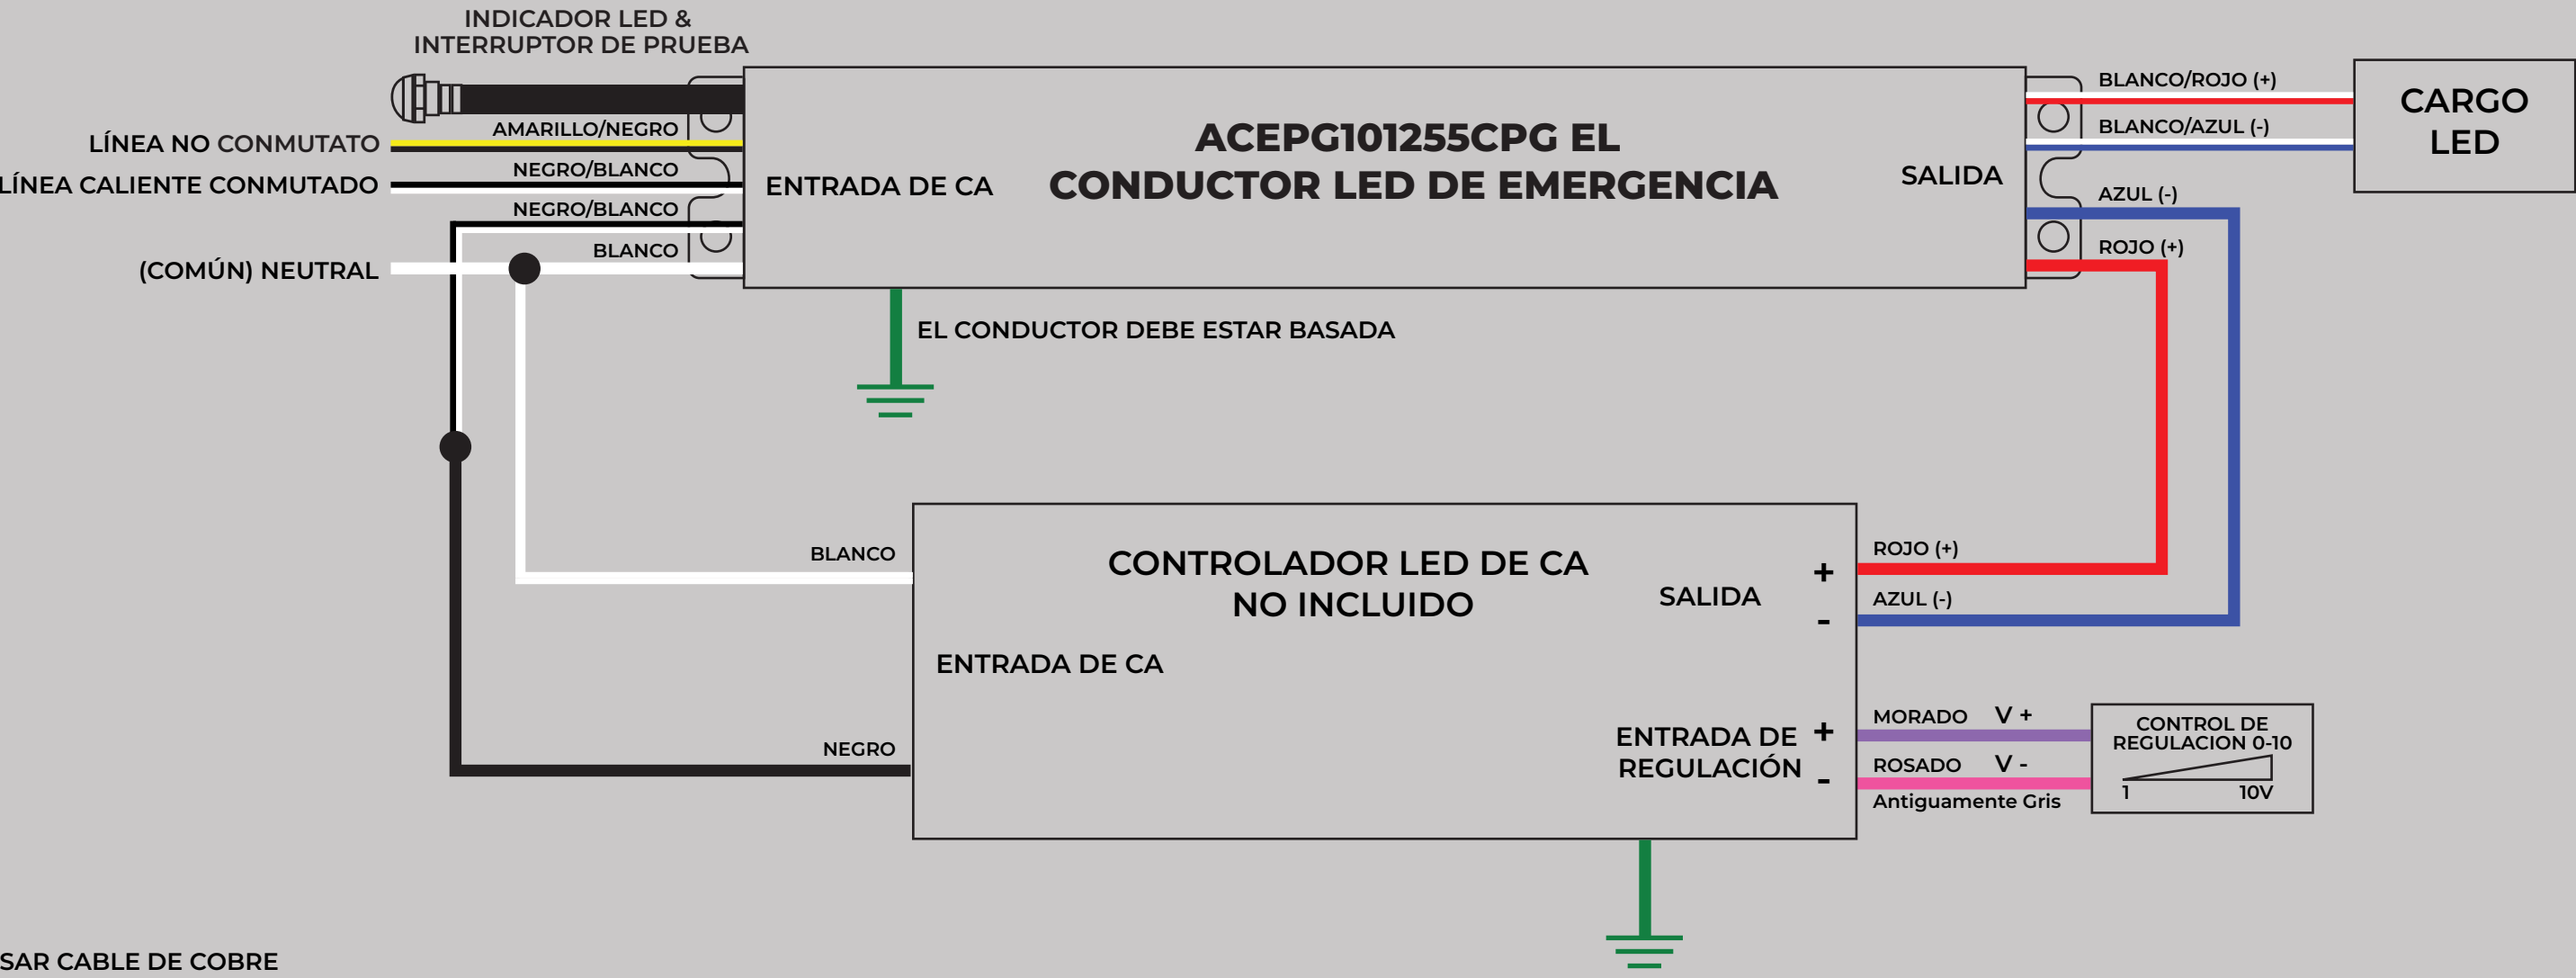

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

