

✓ **MULTI-CURRENT SWITCHING & DIMMING**

**Switch-Hitter™**

Constant Current LED Driver


**Model Number  
AC-84CD2.1AQBE2**

Input Voltage: 120-277V  
Input Frequency: 50/60Hz  
Bottom Mount/Leads

**ELECTRICAL SPECIFICATIONS:**

Output Power Max.	Input Power	Input Current	Min. PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Min. Starting Temp.	IP Rating	Efficiency Up To	Dimming Protocol	Dimming Range
84W	95W	0.79A@120V 0.3A@277V	>0.9	<20	24-40V	2100mA +/- 5%	90°C	-40°C	64	88%	0 to 10V	10 to 100%
70W	80W	0.67A@120V 0.29A@277V	>0.9	<20	24-40V	1750mA +/- 5%	90°C	-40°C	64	87%	0 to 10V	10 to 100%
56W	65W	0.54A@120V 0.24A@277V	>0.9	<20	24-40V	1400mA +/- 5%	90°C	-40°C	64	86%	0 to 10V	10 to 100%
48W	56W	0.47A@120V 0.2A@277V	>0.9	<20	24-40V	1200mA +/- 5%	90°C	-40°C	64	85%	0 to 10V	10 to 100%

**WIRING:**

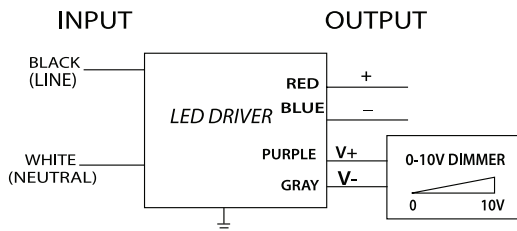

Wiring Lead Lengths					
White	5.9"	Red	5.9"	Gray	5.9"
Black	5.9"	Blue	5.9"	Purple	5.9"

**PHYSICAL:**



Hot Spot

Dimensions			
Length	9.5"	Mounting Length	8.9"
Width	2.4"	Weight	xxx lbs.
Height	1.46"	Case Qty.	xxx

**SAFETY & PERFORMANCE:**

- UL and cUL Recognized
- Class 2
- UL Outdoor Type I
- Class A sound rating
- No PCBs
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C\*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (3 KV)

**INSTALLATION:**

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required for installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded



\*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See [aceleds.com](http://aceleds.com) for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • [www.aceleds.com](http://www.aceleds.com)

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

