

Constant Current LED Driver

Model Number AC60CDI.4AT2S


Input Voltage: 120-277VAC (±10%) Surge Protection: 2Kv
 Input Frequency: 50/60Hz Multi-Switching Current
 Side Mount/Leads Dim-to-Cool
 Dimming: 5 to 100%

PHYSICAL:

Dimensions	
Length	4.3"
Width	1.82"
Height	1.19"
Mounting	4.05"
Weight	0.353 lbs.



The Smallest Possible Form Factors™

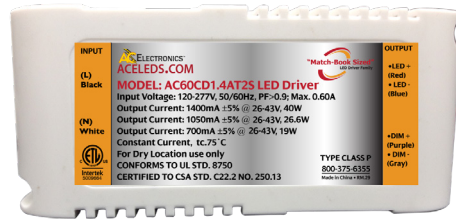


Actual Size

ELECTRICAL SPECIFICATIONS:

Output Power Max.	Input Power	Input Current	Minimum PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Minimum Starting Temp.	IP Rating	Dimming Protocol	Dimming Range	Efficiency Up To
60W	64.5W	0.60A@120V 0.26A@277V	>0.9	<20	26-43V	1400mA±7%	75° C	0° C	20	0 to 10V	5 to 100%	93%
45W	49.5W	0.46A@120V 0.20A@277V	>0.9	<20	26-43V	1050mA±7%	75° C	0° C	20	0 to 10V	5 to 100%	91%
30W	33.3W	0.31A@120V 0.13A@277V	>0.9	<20	26-43V	700mA±7%	75° C	0° C	20	0 to 10V	5 to 100%	90%

WIRING:

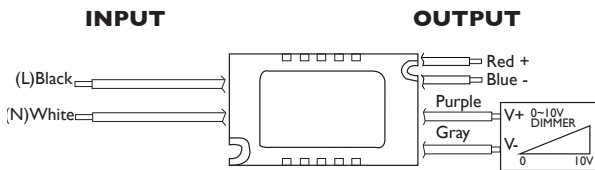

Lead Lengths

Black	12"	Blue	6"	Purple	6"
White	12"	Red	6"	Gray	6"

Approved Dimmers

Lutron	NTSTV-DV	Leviton	IP710 DL
Lutron	NFTV	Watt Stopper	ADF I20277

SAFETY & PERFORMANCE:

- Class P Listed
- Class A sound rating
- No PCBs
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- Warranty: 5 yrs based on max case temp of 75°C*
- Input/Output Isolation
- Surge Protection (2 KV)
- Thermal Protection (Dim-to-Cool)@ 90°C (Internally)
- Dimming Curve on the next page

INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- 22 AWG 600V/105C tinned stranded copper lead-wires are required to use in installation
- Max Remote installation distance is 33 ft




*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years from date of manufacture when operated at max case temp of up to ≤75°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.



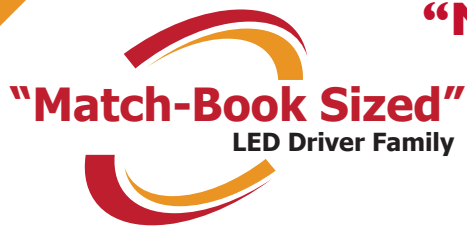

"Match-Book Sized" LED Driver Family
The Smallest Possible Form Factors

AC60CDI.4AT2S

