

### Description: Constant Current Canopy LED Module

- Garage Lights, Gas Station Lights or Area Lighting
- Highly efficient
- Long life

Part Number	Nominal					CRI
	Current (A)	Initial Lumens	Vf (Volts)	Power (W)	Lm/W	
CLE10/LH3/50	1.0	3590	31	31	84	74

• MID Flux Bin Values are shown for CCT of 5000K. Tolerance of ±10% at 25°C.  
• Vf is at 25°C with max tolerance of ±5%.

### General Performance Specifications

- Lumen Maintenance:  $L_{87}$  50,000 hrs,  $t_c = 85^\circ\text{C}$

### Application


- Min. Ambient Operation Temp:  $-40^\circ\text{C}$
- Max. Board Temp. (at  $t_c$ ):  $85^\circ\text{C}$
- Max. Board Temp. for life rating:  $85^\circ\text{C}$
- Max. Current Rating: 1500mA

### Regulatory

- RoHS Compliant

### Note:

- Uses the Samsung LH351B

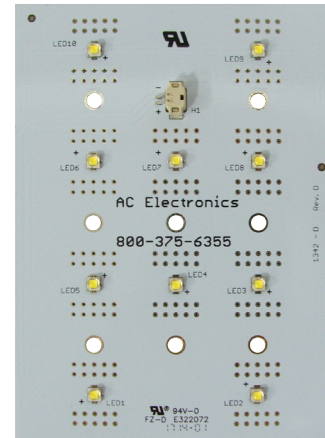

### Mechanical Dimensions

- Length: 4.3
- Width: 3.15
- Height: 0.3

### Part Number Options

Part Number	CCT
CLE10/LH3/50	5000K



Assembled in the USA

Application and performance specification subject to change without notification.