


## Description: Constant Current Canopy LED Module

- Garage Lights, Gas Station Lights or Area Lighting
- Highly efficient
- Long life

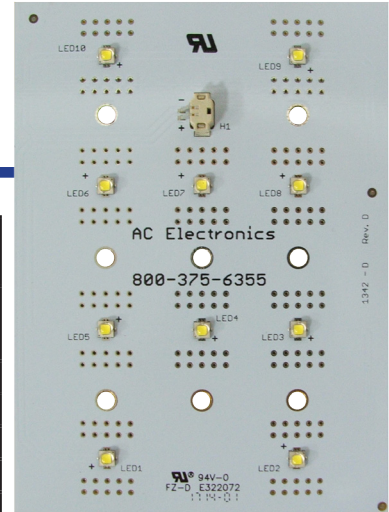

Part Number	Nominal					CRI
	Current (A)	Initial Lumens	Vf (Volts)	Power (W)	Lm/W	
CLE10/XPG/50	1.5	4580	31	73	62.7	75
	1.4	4340	30.8	58	74.8	
	1.15	3740	30.3	53	70.6	
	1.05	3500	30.1	48	72.9	
	1	3380	30	49	69	
	0.875	3192	29.6	42	76	
	0.833	2912	29.4	38	76.6	
	0.7	2540	29	28	90.7	
	0.5	1883	28.4	23	81.9	
	0.45	1719	28.3	18	95.5	
	0.44	1686	28.3	19	88.7	
	0.35	1390	28	39	35.6	

• MID Flux Bin Values are shown for CCT of 5000K. Tolerance of  $\pm 10\%$  at 25°C.  
 • Vf is at 25°C with max tolerance of  $\pm 5\%$ .

### General Performance Specifications

- Lumen Maintenance:  $\geq 70\%$  @ 5 yrs

### Application

- Min. Ambient Operation Temp:  $-40^{\circ}\text{C}$
- Max. Board Temp. (at  $t_c$ ):  $45^{\circ}\text{C}$
- Max. Board Temp. for life rating:  $45^{\circ}\text{C}$
- Max. Current Rating: 1500mA

### Regulatory

- RoHS Compliant

### Note:

- Uses the CREE XP-G2 LED

### Mechanical Dimensions

- Length: 4.3
- Width: 3.15
- Height: 0.3

### Part Number Options

Part Number	CCT
CLE10/XPG/50	5000K



©2016  
Revised 01/06/2016

Assembled in the USA

Application and performance specification subject to change without notification.