


Description: Driverless LED engine solution

- Surface Mount, Recessed or Suspended Luminaires
- Highly efficient
- Long life



Part Number	Size/mm	Input Vac	Input Power (W)	PF	Flux Lm	Efficiency LM/W	CCT K	CRI	Dimming
LA28/AC12016/40	280*30	120	16	0.95	1600	100	4000	80	TRIAC

Note: 1-Various CCT available (2700-6000K); LA28/XXXXXX/40X (8-80CRI; 40-4000K CCT) • Typical Optical-electronic parameters above @Ta=25°C.

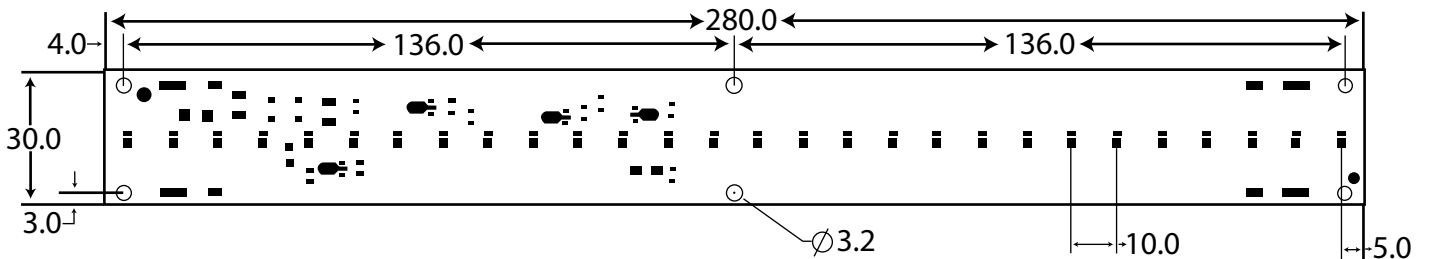

Application


- AC Input directly
- EMI compliance
- THDI<19%
- Surge protection: 2.5Kv
- High-pot level: 1.5Kv

Mechanical Dimensions


- Length: 11.02"
- Width: 1.18"




Linear Light



Troffer Light



Panel Light



Wall Light

RoHS
COMPLIANT
LEAD-FREE