


### Description: Ultra High Efficiency Constant Current Linear LED Module

- Surface Mount, Recessed or Suspended Luminaires
- High Efficiency
- Long life
- The typical driver output is 700mA@40VDC



Part Number	Size/mm	Voltage Typ (VDC)	Voltage Max (VDC)	Drive Current (mA)	Power Max. (W)	Flux Lm	Efficiency Up to LM/W	CCT K	CRI
LE168/70030/840	560 x 24	40	42	700	30	4950	176	4000	80

Note: LE168/XXXXXX/840 (8-80CRI; 40-4000K CCT) • Typical Optical-electronic parameters above @ Ta=25°C.

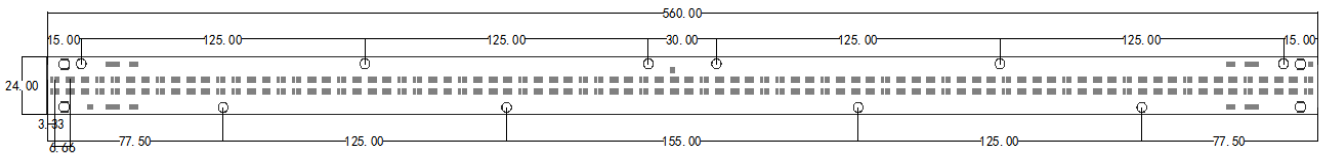

(UNITS = MM)

### Application

- High efficiency up to 176 lm/W
- Poke-In wiring connectors
- Within 3-step Macadam
- Various CCT available (4000-5000°K)

### Mechanical Dimensions


- Length: 22.05"
- Width: 0.94"

### RECOMMENDED LED DRIVER OPTION


Model	Volts	Current	Dimensions
AC60CDI.4AT2S	26-43V	1400mA, 1050mA, 700mA	4.3" x 1.82" x 1.19"
AC-30CDI.125APUP	15-55V	350mA - 1250mA	12.4" x 1.3" x 1.08"
AC-30CT700KBH8	30-43V	700mA	4.56" x 2.48" x 1.18"




Linear Light




Troffer Light



Panel Light



Wall Light

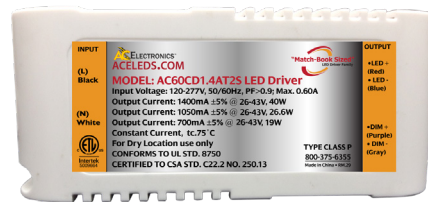

Application and performance specifications subject to change without notification.