


Description: Ultra High Efficiency Constant Current Linear LED Module

- Surface Mount, Recessed or Suspended Luminaires
- High Efficiency
- Long life
- The typical driver output is 600mA@11.6VDC



Part Number	Size/mm	Voltage Typ (VDC)	Voltage Max (VDC)	Current Typ. (mA)	Current Max (mA)	Power Typ (W)	Power Max. (W)	Flux Lm	Efficiency LM/W	CCT K	CRI
LE36/135018/840	280*24	11.6	13.2	600	1350	7	18	1180	170	4000	80

Note: 1-VariouS CCT available (2700-6000K); LE36/XXXXX/840 (8-80CRI; 40-4000K CCT) • Typical Optical-electronic parameters above@Ta=25°C.

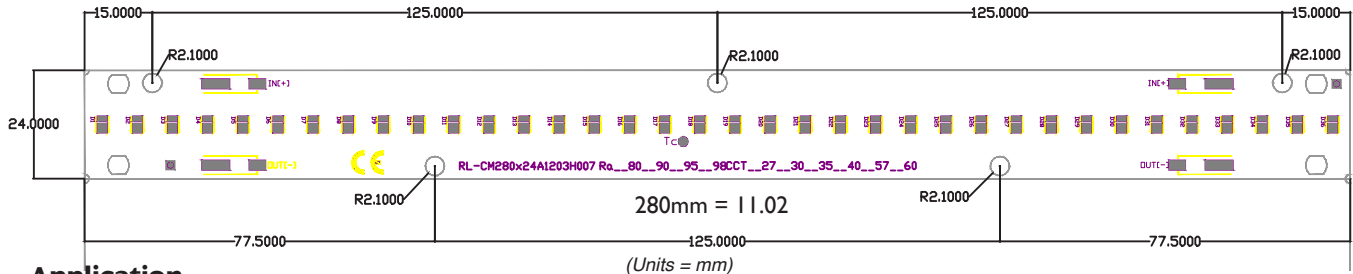

Application

- High efficiency up to 170 lm/W
- Poke-In wiring connectors
- Within 3-step Macadam
- Various CCT available
- Optional 90 & 95 CRI

Mechanical Dimensions


- Length: 11.02"
- Width: 0.94"

RECOMMENDED LED DRIVER OPTION


Model	Volts	Current	Dimensions
AC-25CD1.25APUM	11-55V	350mA - 1250mA	5.23" x 2.48" x 1.18"
AC-25CD1.25APUN	11-55V	350mA - 1250mA	6.22" x 1.73" x 1.22"




Linear Light



Troffer Light



Panel Light



Wall Light



Application and performance specifications subject to change without notification.