


Description: Constant Current Linear LED Module

- Surface Mount, Recessed or Suspended Luminaires
- Highly efficient
- Long life
- The typical driver output is 350mA@44VDC



Part Number	Nominal					CRI
	Current (A)	Initial Lumens	Vf (Volts)	Power (W)	Lm/W	
LE60/EV2835/XX	0.350	2382	44	14-18	154	≥80

• Minimum flux value shown for CCT of 5000K. Tolerance of ±10% at 25°C.
• Vf is at 25°C with max tolerance of ±5%.

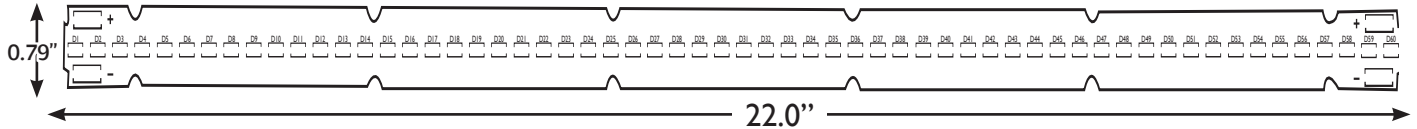

Application

- Min. Ambient Operation Temp: -40 °C
- Max. Board Temp. (at t_c): +85 °C
- Max. Board Temp. for life rating: +65 °C
- Max. Current Rating: 0.720 Amps

Mechanical Dimensions

- Length: 22.0"
- Width: 0.79"
- Height: 0.20"

Regulatory

- RoHS Compliant

Note:

- Uses 60 Everlight 2835 LEDs
- Uses Molex 104188 Connector

Part Number Options

Part Number	CCT
LE60/EV2835/30	3000 °K
LE60/EV2835/35	3500 °K
LE60/EV2835/40	4000 °K
LE60/EV2835/50	5000 °K
LE60/EV2835/57	5700 °K

Warranty:

- 5 Year Warranty

LED DRIVER OPTIONS

Model	Volts	Current	Board (Parallel)
AC-25CDI.25APMV	15-55V	350-1250mA	1
AC-30CDI.25APUP	15-55V	350-1250mA	1
AC-40CDI.4APSC	15-55V	400-1400mA	2
AC-50CDI.4APUQ	15-55V	400-1400mA	2
AC-50CDI.4AHZL	15-55V	400-1400mA	2
AC-60CDI.4APPU	27-55V	700-1400mA	2
AC-98CD2.IAPMY	27-55V	1050-2100mA	4

Made in the USA

Application and performance specification
subject to change without notification.

