


Description: Ultra High Efficiency Constant Current Linear LED Module

- Surface Mount, Recessed or Suspended Luminaires
- High Efficiency
- Long life
- The typical driver output is 600mA@23.2VDC



| Part Number | Size/mm | Voltage Typ (VDC) | Voltage Max (VDC) | Current Typ. (mA) | Current Max (mA) | Power Typ (W) | Power Max. (W) | Flux Lm | Efficiency LM/W | CCT K | CRI |
|-----------------|---------|-------------------|-------------------|-------------------|------------------|---------------|----------------|---------|-----------------|-------|-----|
| LE72/135036/840 | 560*24 | 23.2 | 26.4 | 600 | 1350 | 14 | 36 | 2360 | 170 | 4000 | 80 |

Note: 1-VariouS CCT available (2700-6000K); LE72/XXXXXX/840 (8-80CRI; 40-4000K CCT) • Typical Optical-electronic parameters above@Ta=25°C.

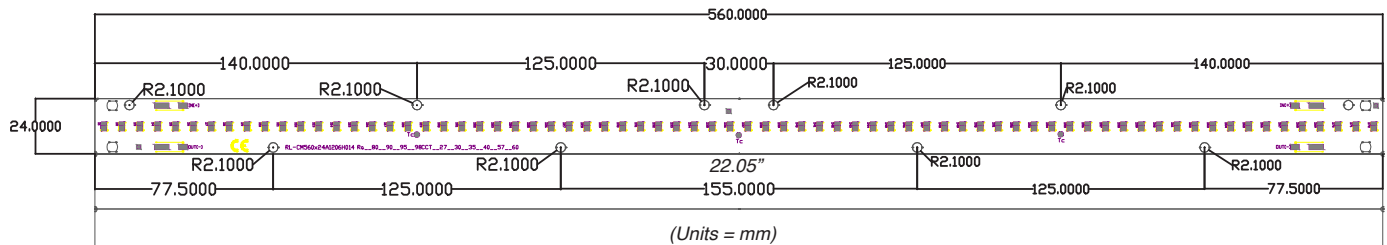

Application

- High efficiency up to 170 lm/W
- Poke-In wiring connectors
- Within 3-step Macadam
- Various CCT available
- Optional 90 & 95 CRI

Mechanical Dimensions


- Length: 22.05"
- Width: 0.94"

RECOMMENDED LED DRIVER OPTION


| Model | Volts | Current | Dimensions |
|-----------------|--------|--------------|-----------------------|
| AC-40CDI.4APTKV | 15-55V | 400mA-1400mA | 12.8" x 1.34" x 1.06" |
| AC-40CDI.4APSC | 15-55V | 400mA-1400mA | 12.8" x 1.34" x 1.06" |
| AC-40CDI.4APMZ | 15-55V | 400mA-1400mA | 6.22" x 1.73" x 1.22" |



Linear Light



Troffer Light



Panel Light



Wall Light



Application and performance specifications subject to change without notification.