


Description: Constant Current Linear LED Module

- Surface Mount, Recessed or Suspended Luminaires
- Highly efficient
- Long life
- The typical driver output is 360mA@34VDC



Part Number	Nominal					CRI	CTT
	Current (A)	Initial Lumens	Vf (Volts)	Power (W)	Lm/W		
LE72/LM281B/40	0.360	2150	33-35	11-13	180	≥80	4000°K

• MID Flux Bin Values are shown for CCT of 4000K. Tolerance of ±10% at 25°C.
 • Vf is at 25°C with max tolerance of ±5%.

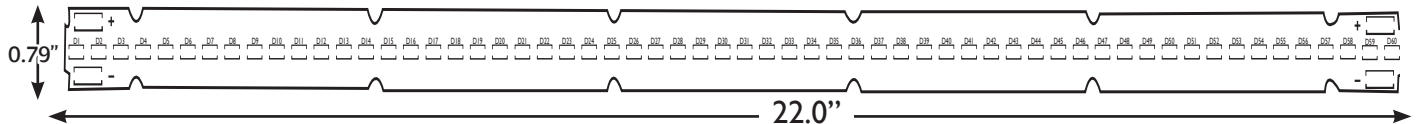

Application

- Min. Ambient Operation Temp: -20°C
- Max. Board Temp. (at t_c): +90°C
- Max. Board Temp. for life rating: +45°C
- Max. Current Rating: 0.560 Amps

Mechanical Dimensions

- Length: 22.0"
- Width: 0.79"
- Height: 0.25"

Regulatory

- RoHS Compliant

Note:

- Uses 72 Samsung LM281B LEDs
- Uses the Wago Connector

LED DRIVER OPTIONS

Model	Volts	Current	Board (Parallel)
AC-25CD1.25APME	15-55V	350-1250mA	1
AC-30CD1.25APW0	15-55V	350-1250mA	2
AC-50CD1.4APPI	15-55V	400-1400mA	3
AC-80CD2.1APVQ	27-55V	1050-1400mA	4

Warranty:

- 5 Year Warranty when used with a recommended AC Electronics aceleds Driver



Application and performance specification subject to change without notification.