


Description: Ultra High Efficiency Constant Current Linear LED Module


- Surface Mount, Recessed or Suspended Luminaires
- High Efficiency
- Long life
- The typical driver output is 250mA@50VDC



For Position ONLY

| Part Number | Size/mm Diameter | Voltage Typ (VDC) | Voltage Max (VDC) | Drive Current (mA) | Power Max. (W) | Flux Lm | Efficiency Up to LM/W | CCT K | CRI |
|-----------------|------------------|-------------------|-------------------|--------------------|----------------|---------|-----------------------|-------|-----|
| LE90/025015/840 | 160 | 50 | 58 | 250 | 15 | 2000 | 150 | 4000 | 80 |

Note: LE90/XXXXXX/840 (8-80CRI; 40-4000K CCT) • Typical Optical-electronic parameters above @ Ta=25°C.

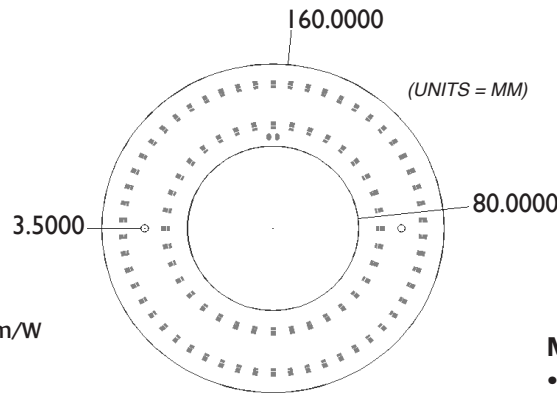

Application

- High efficiency up to 150 lm/W
- Poke-In wiring connectors
- Within 3-step Macadam
- Various CCT available (3000-4000°K)

Mechanical Dimensions


- Diameter: 6.30"
- Thick: 0.05"

RECOMMENDED LED DRIVER OPTION


| Model | Volts | Current | Dimensions |
|---------------|--------|---------------------|-----------------------|
| ACI5CD250AT2Q | 32-60V | 100mA, 175mA, 250mA | 2.29" x 1.20" x 0.91" |




Linear Light




Troffer Light



Panel Light



Wall Light

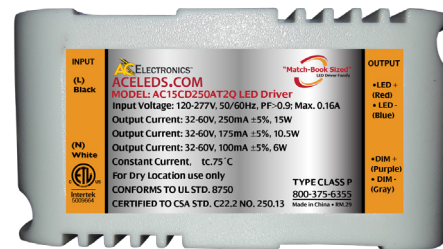

Application and performance specifications subject to change without notification.