


### Description: Ultra High Efficiency Constant Current circular LED Module


- Surface Mount, Recessed or Suspended Luminaires
- High Efficiency
- Long life
- The typical driver output is 250mA@50VDC



**For Position ONLY**

Part Number	Size/mm Diameter	Voltage Typ (VDC)	Voltage Max (VDC)	Drive Current (mA)	Power Max. (W)	Flux Lm	Efficiency Up to LM/W	CCT K	CRI
LE90/025015/840	160	50	58	250	15	2000	150	4000	80

Note: LE90/XXXXXX/840 (8-80CRI; 40-4000K CCT) • Typical Optical-electronic parameters above @ Ta=25°C.

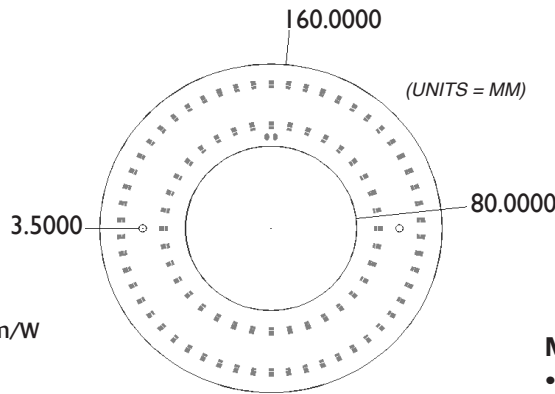

### Application

- High efficiency up to 150 lm/W
- Poke-In wiring connectors
- Within 3-step Macadam
- Various CCT available (3000-4000°K)

### Mechanical Dimensions


- Diameter: 6.30"
- Thick: 0.05"

### RECOMMENDED LED DRIVER OPTION


Model	Volts	Current	Dimensions
ACI5CD250AT2Q	32-60V	100mA, 175mA, 250mA	2.29" x 1.20" x 0.91"




Linear Light




Troffer Light



Panel Light



Wall Light

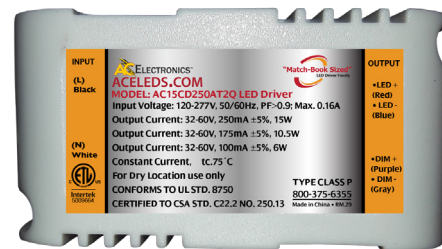

Application and performance specifications subject to change without notification.