

ENGLISH WIRING DIAGRAM

**ACEX161555WCP
EMERGENCY LED DRIVER
DC-DC CONVERTER**

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 150 mA
- Input Power: 11 W
- Output Voltage: 15-55 V
- Output Current: 290 mA - 1060 mA
- Output Power: 18 W
- Battery Voltage: 9.6 V

CAUTION:
See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION:
Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AMT11

800-375-6355

BATTERY

**ACEPX161555WCP
EMERGENCY LED DRIVER
LiFePO₄, 9.6 V, 3600 mAh**


- Battery Voltage: 9.6 V
- Battery Charge Current: 350 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

POWER

800-375-6355


ACE LEDS

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

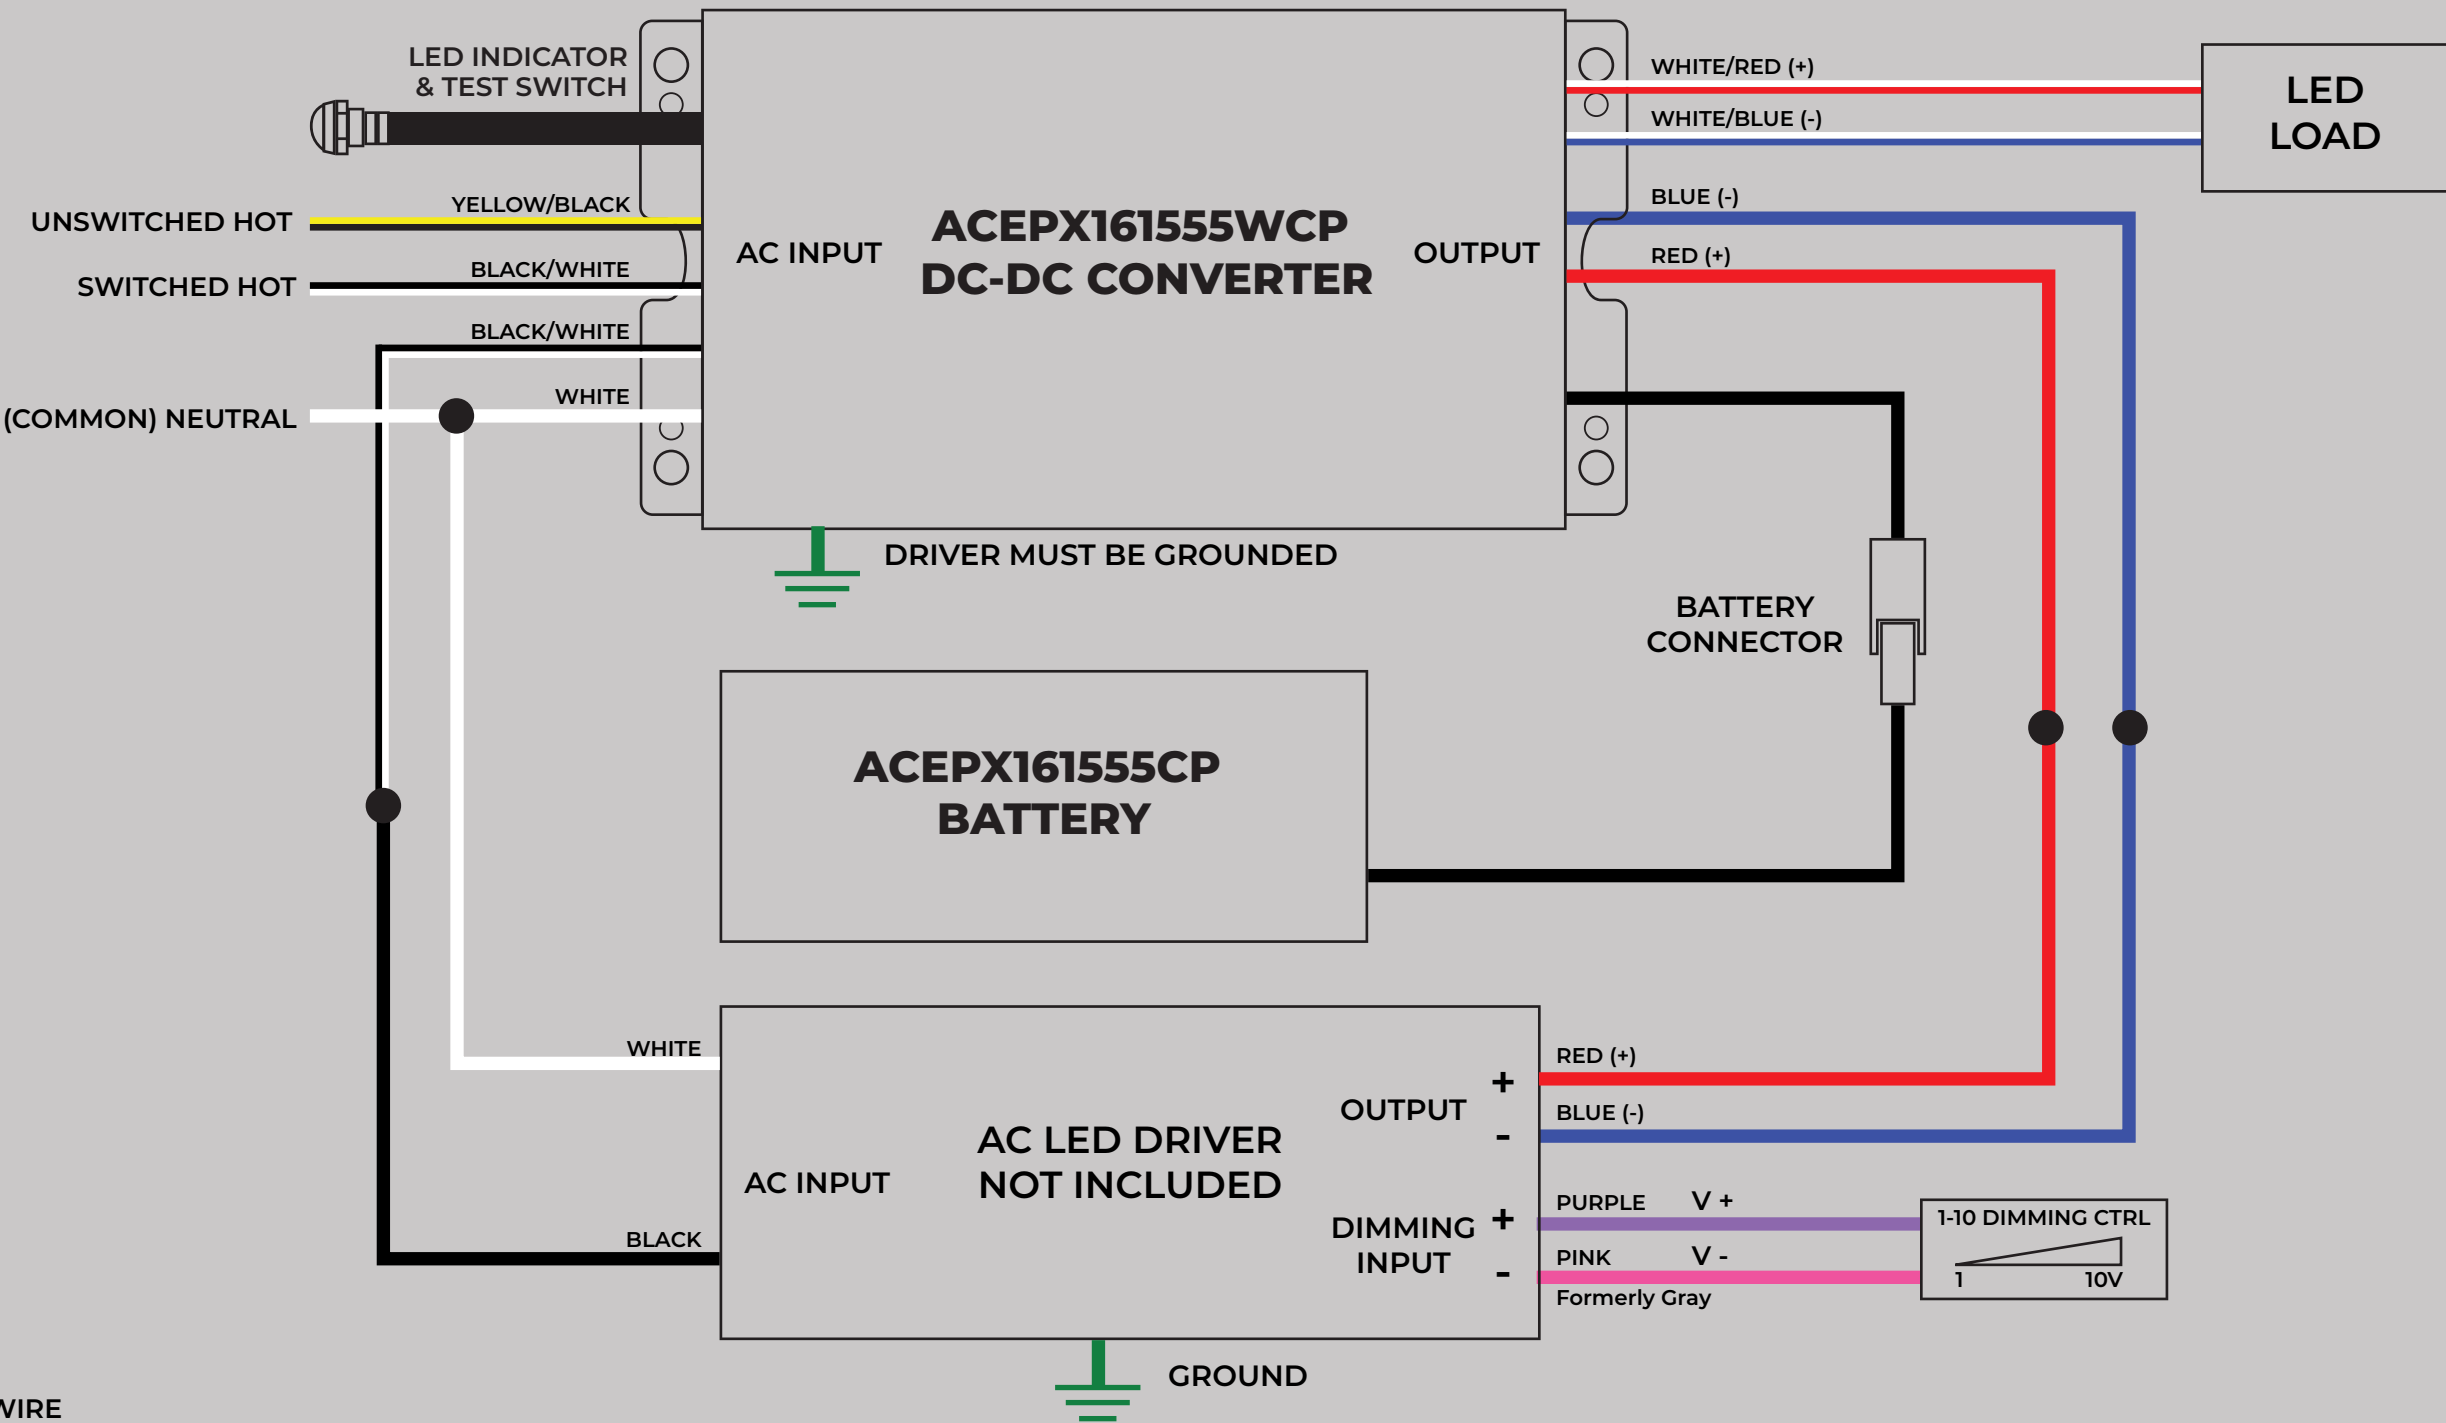

USE COPPER WIRE

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

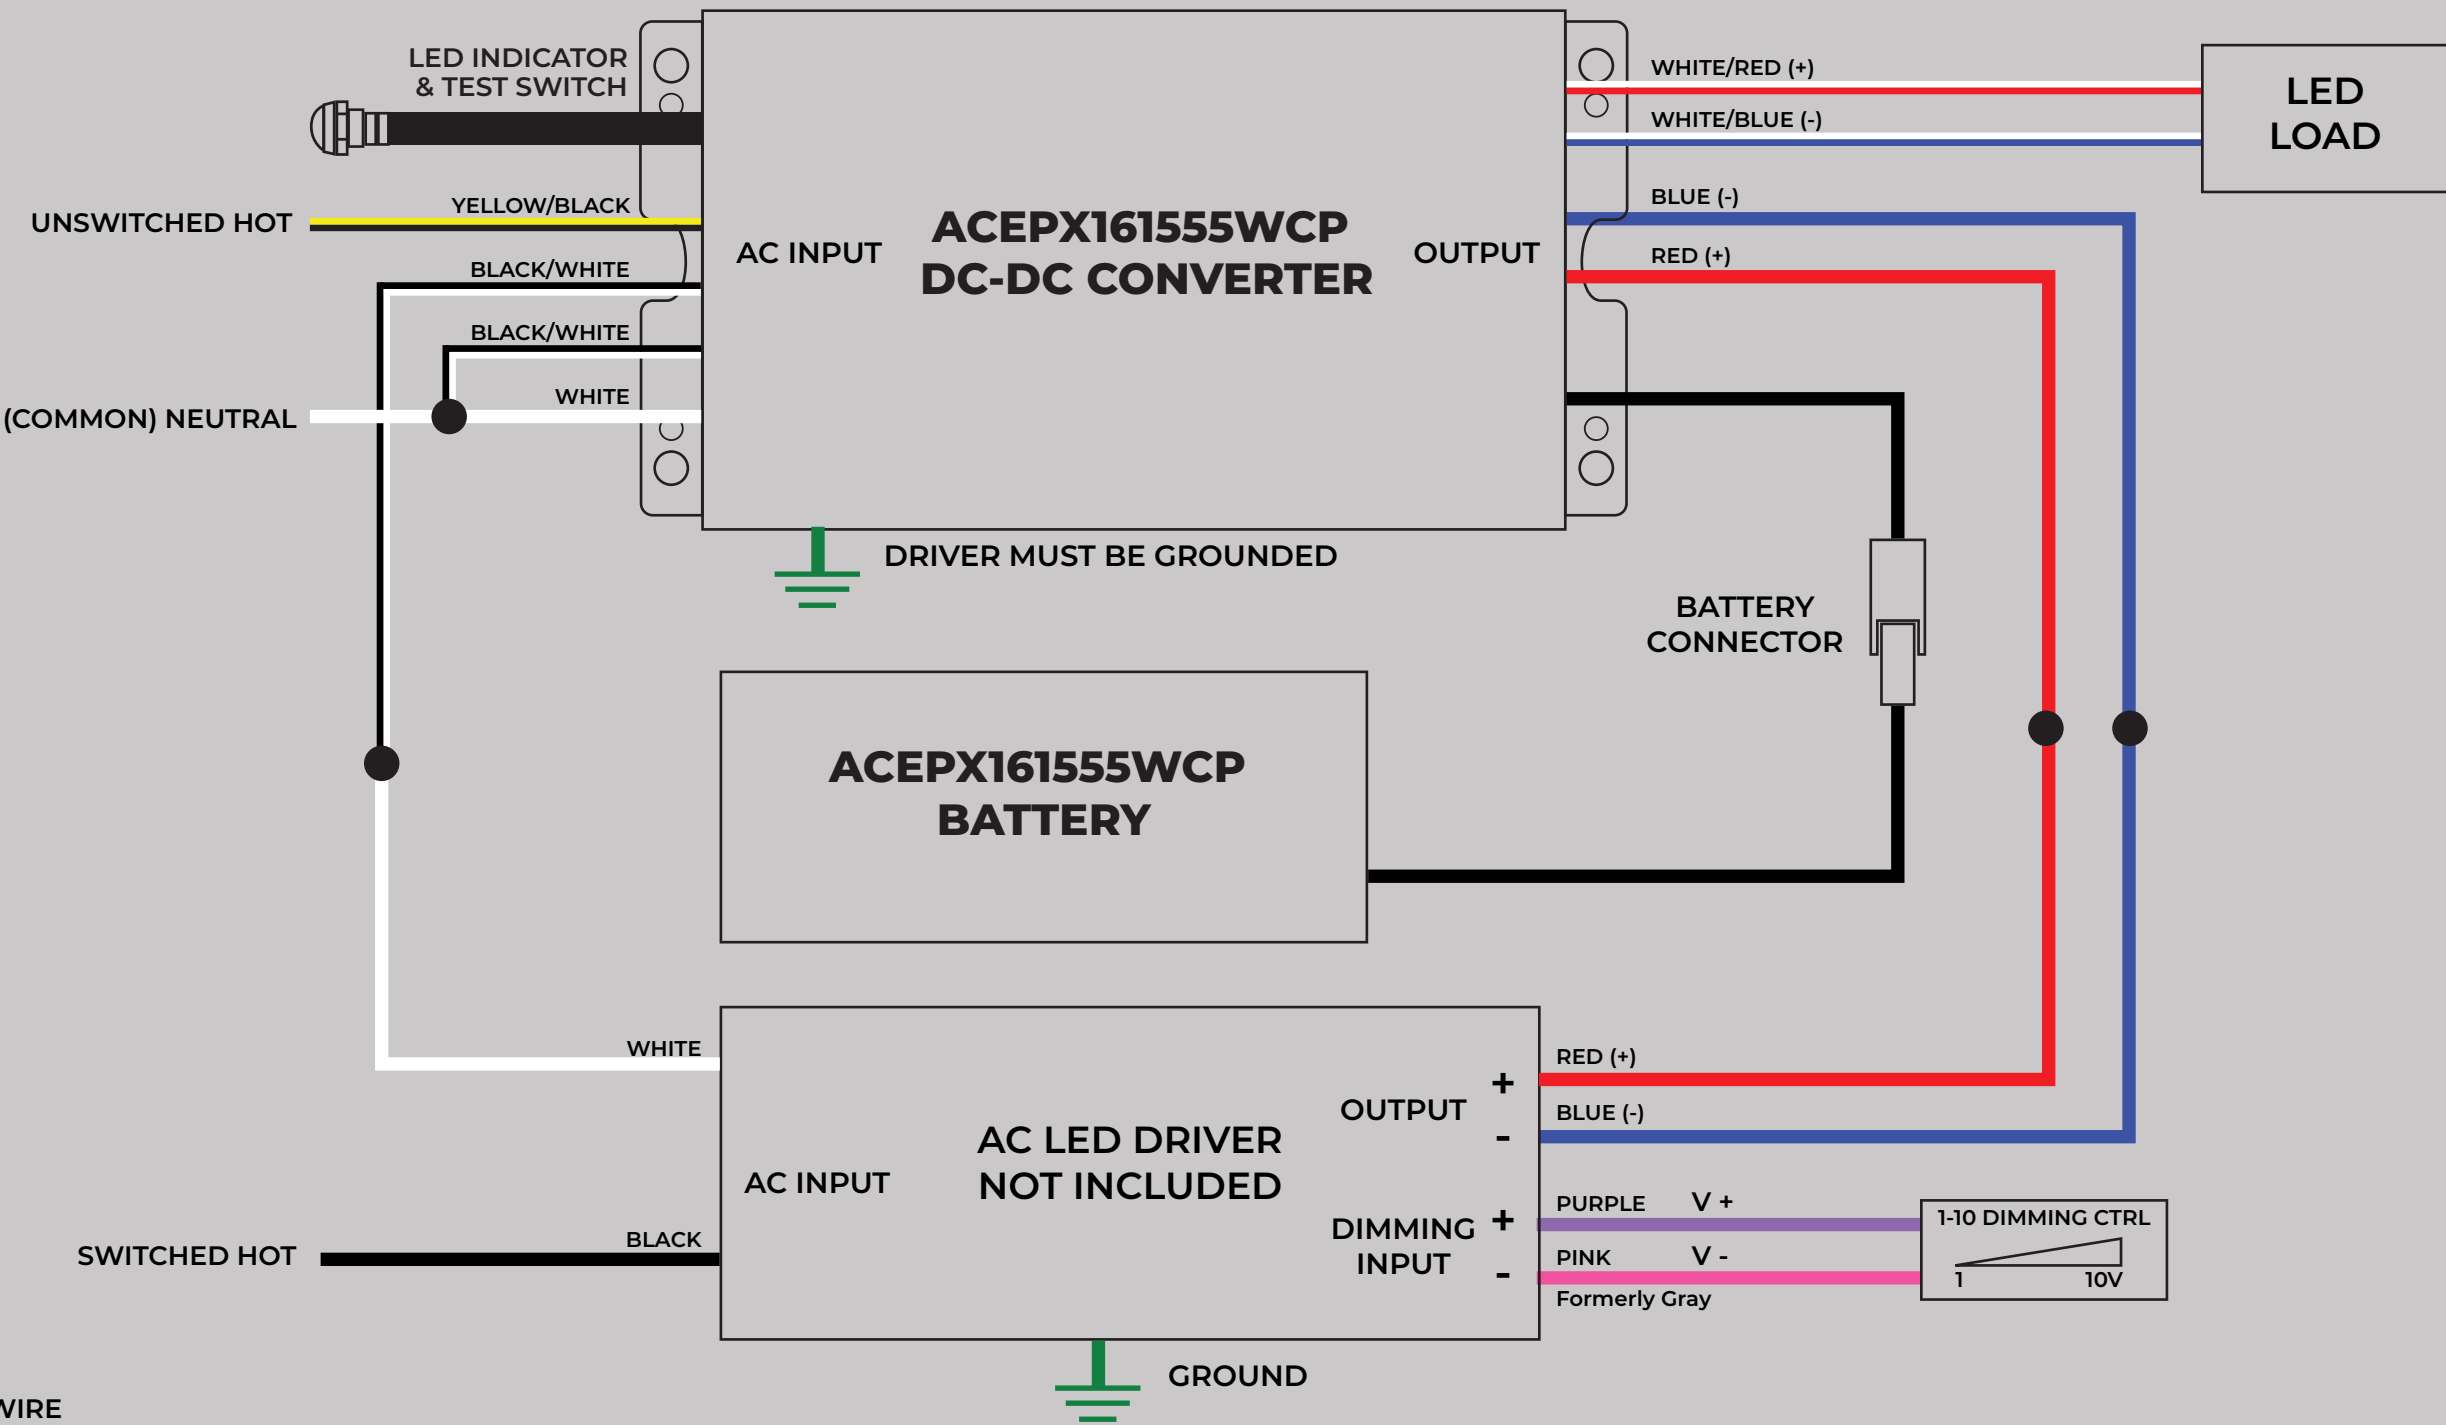

USE COPPER WIRE

DIAGRAMA DE CABLEADO
ESPAÑOL

ACEX161555WCP
EMERGENCY LED DRIVER
DC-DC CONVERTER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 130 mA
- Input Power: 11 W
- Output Voltage: 15-55 V
- Output Current: 200 mA - 1050 mA
- Output Power: 16 W
- Battery Voltage: 9.6 V

- Battery Charge Current: 350 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION:
See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION:
Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

CSA C22.2 No. 143
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AMTII

POWER
LED

800-375-6355

BATTERY

ACEPX161555WCP
EMERGENCY LED DRIVER
LiFePO₄, 9.6 V, 3600 mAh


- Battery Voltage: 9.6 V
- Battery Charge Current: 350 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min

POWER
LED

800-375-6355

Made in Taiwan - AM226

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

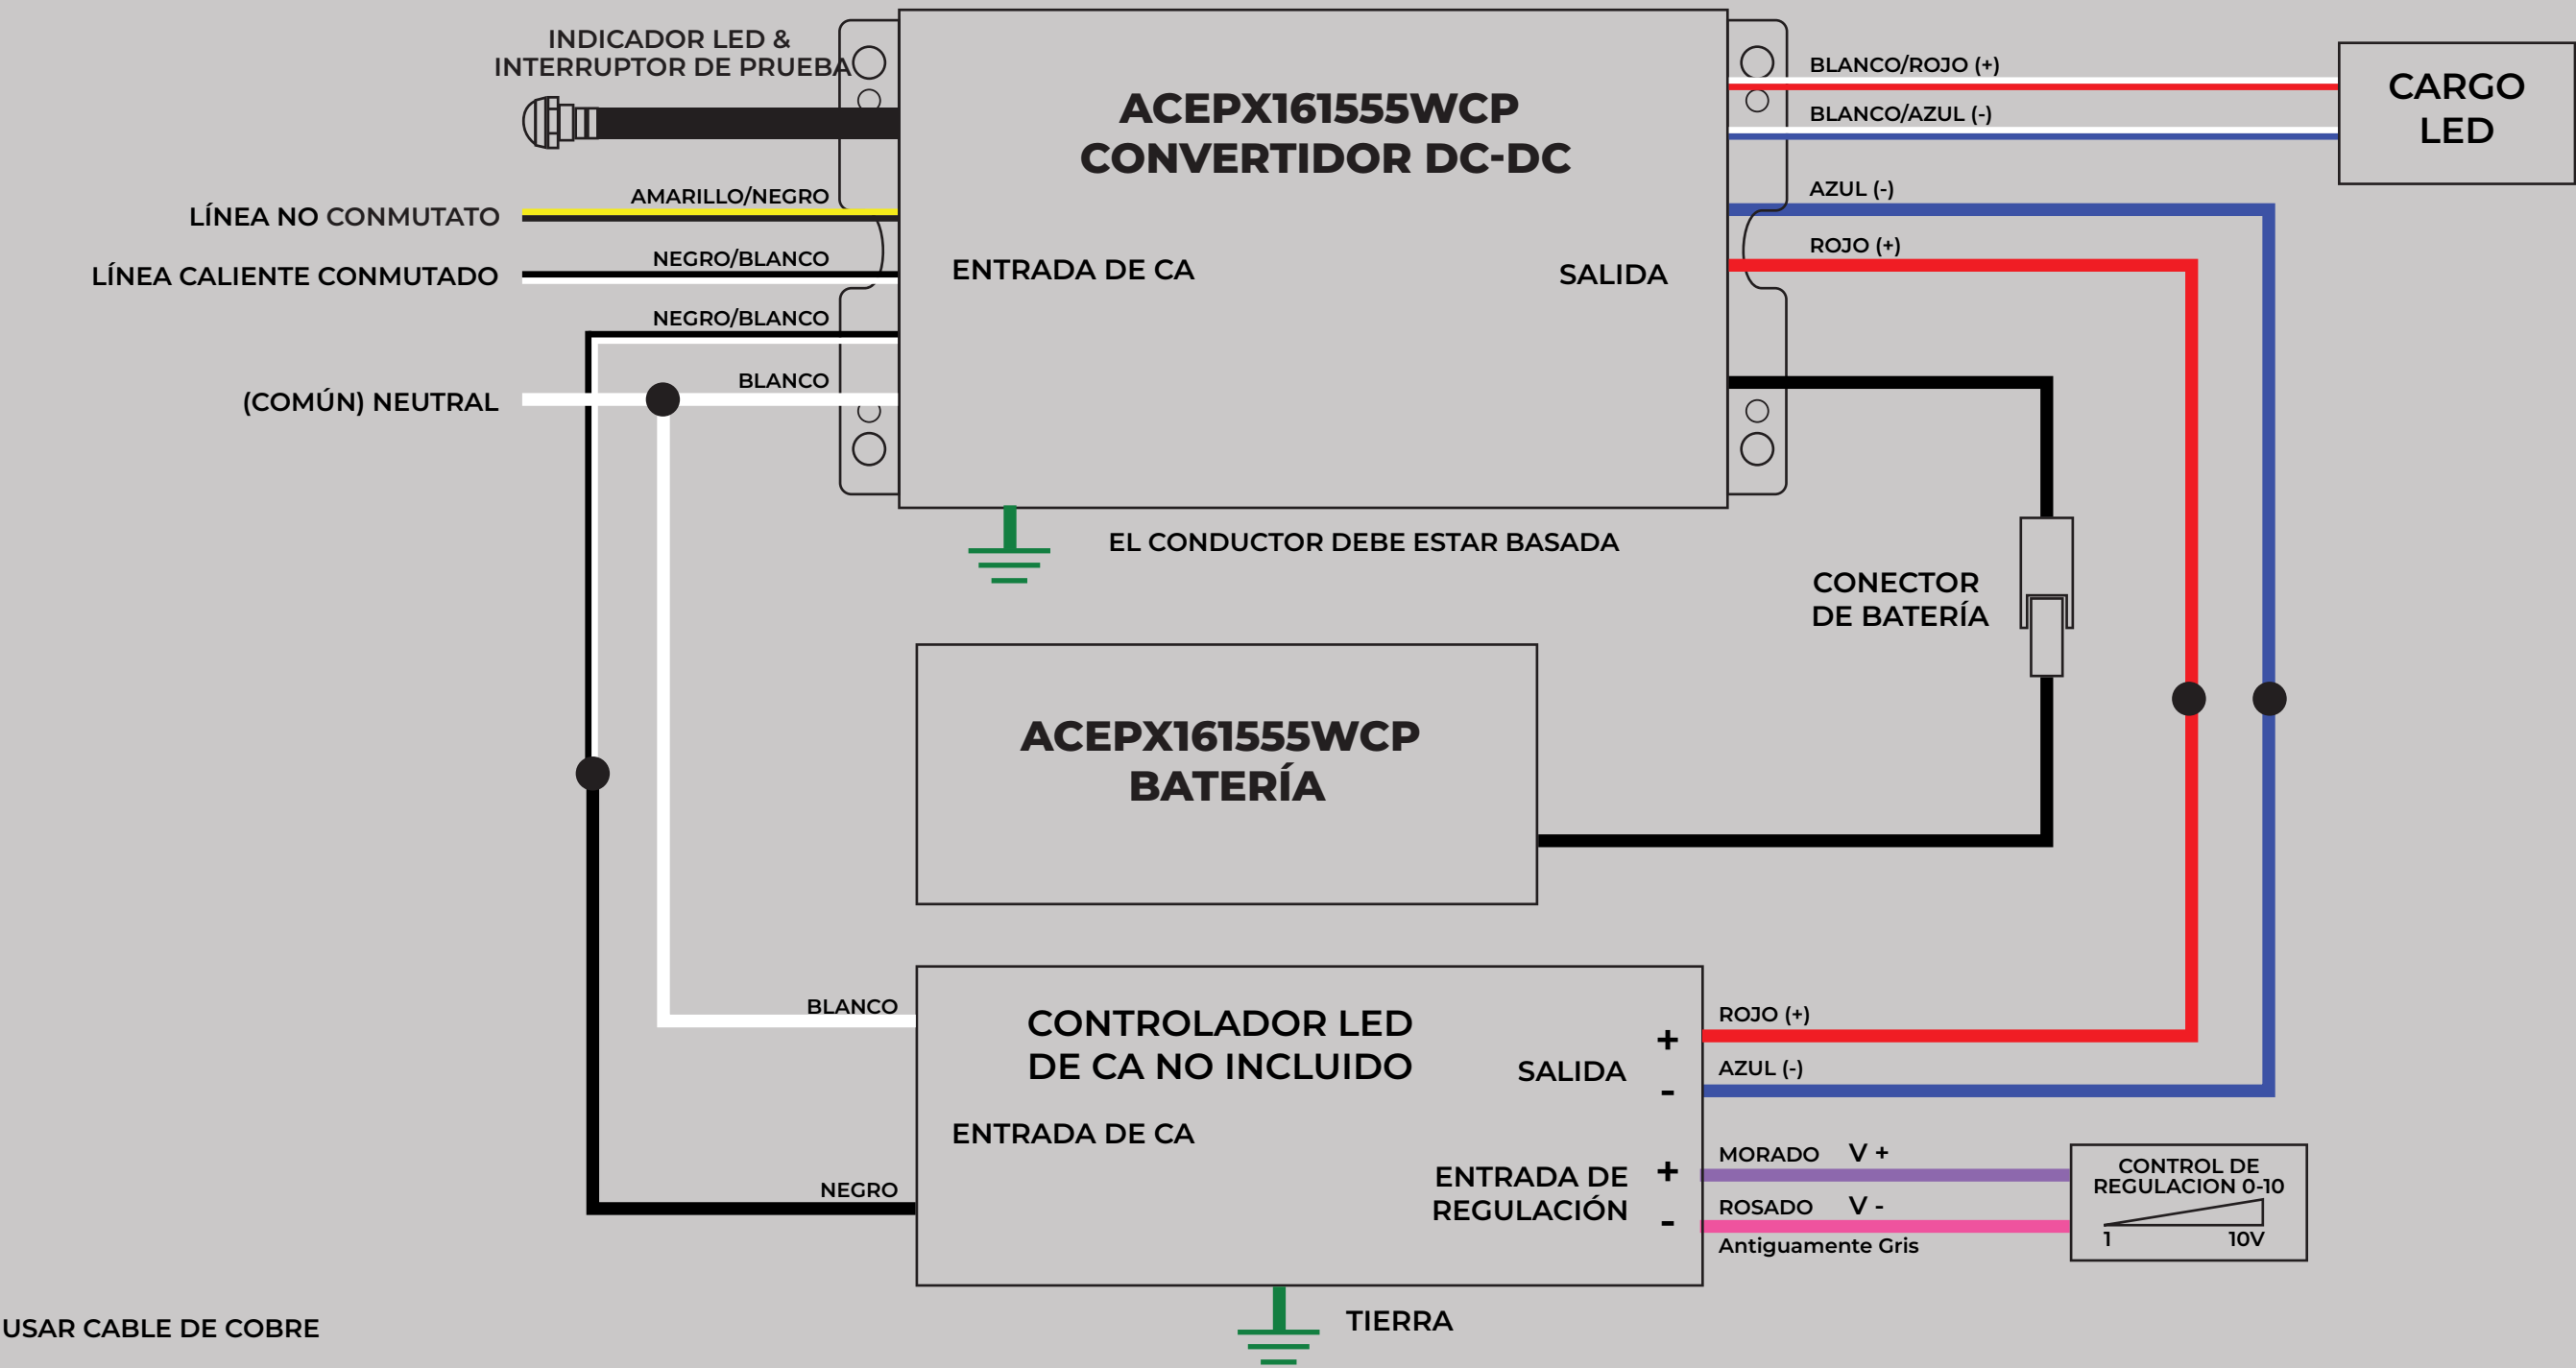

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

