

ENGLISH WIRING DIAGRAM

**ACEPX101555CP
EMERGENCY LED DRIVER
DC-DC CONVERTER**

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 130 mA
- Input Power: 8 W
- Output Voltage: 18-55 V
- Output Current: 180 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 6.4 V
- Battery Charge Current: 185 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION:
See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION:
Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AM111

POWER
TAA
UL
800-375-6355


**ACEPX101555CP
EMERGENCY LED DRIVER
LiFePO₄, 6.4 V, 3300 mAh**

- Battery Voltage: 6.4 V
- Battery Charge Current: 185 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min

POWER
TAA
UL
800-375-6355


ACE LEDS

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

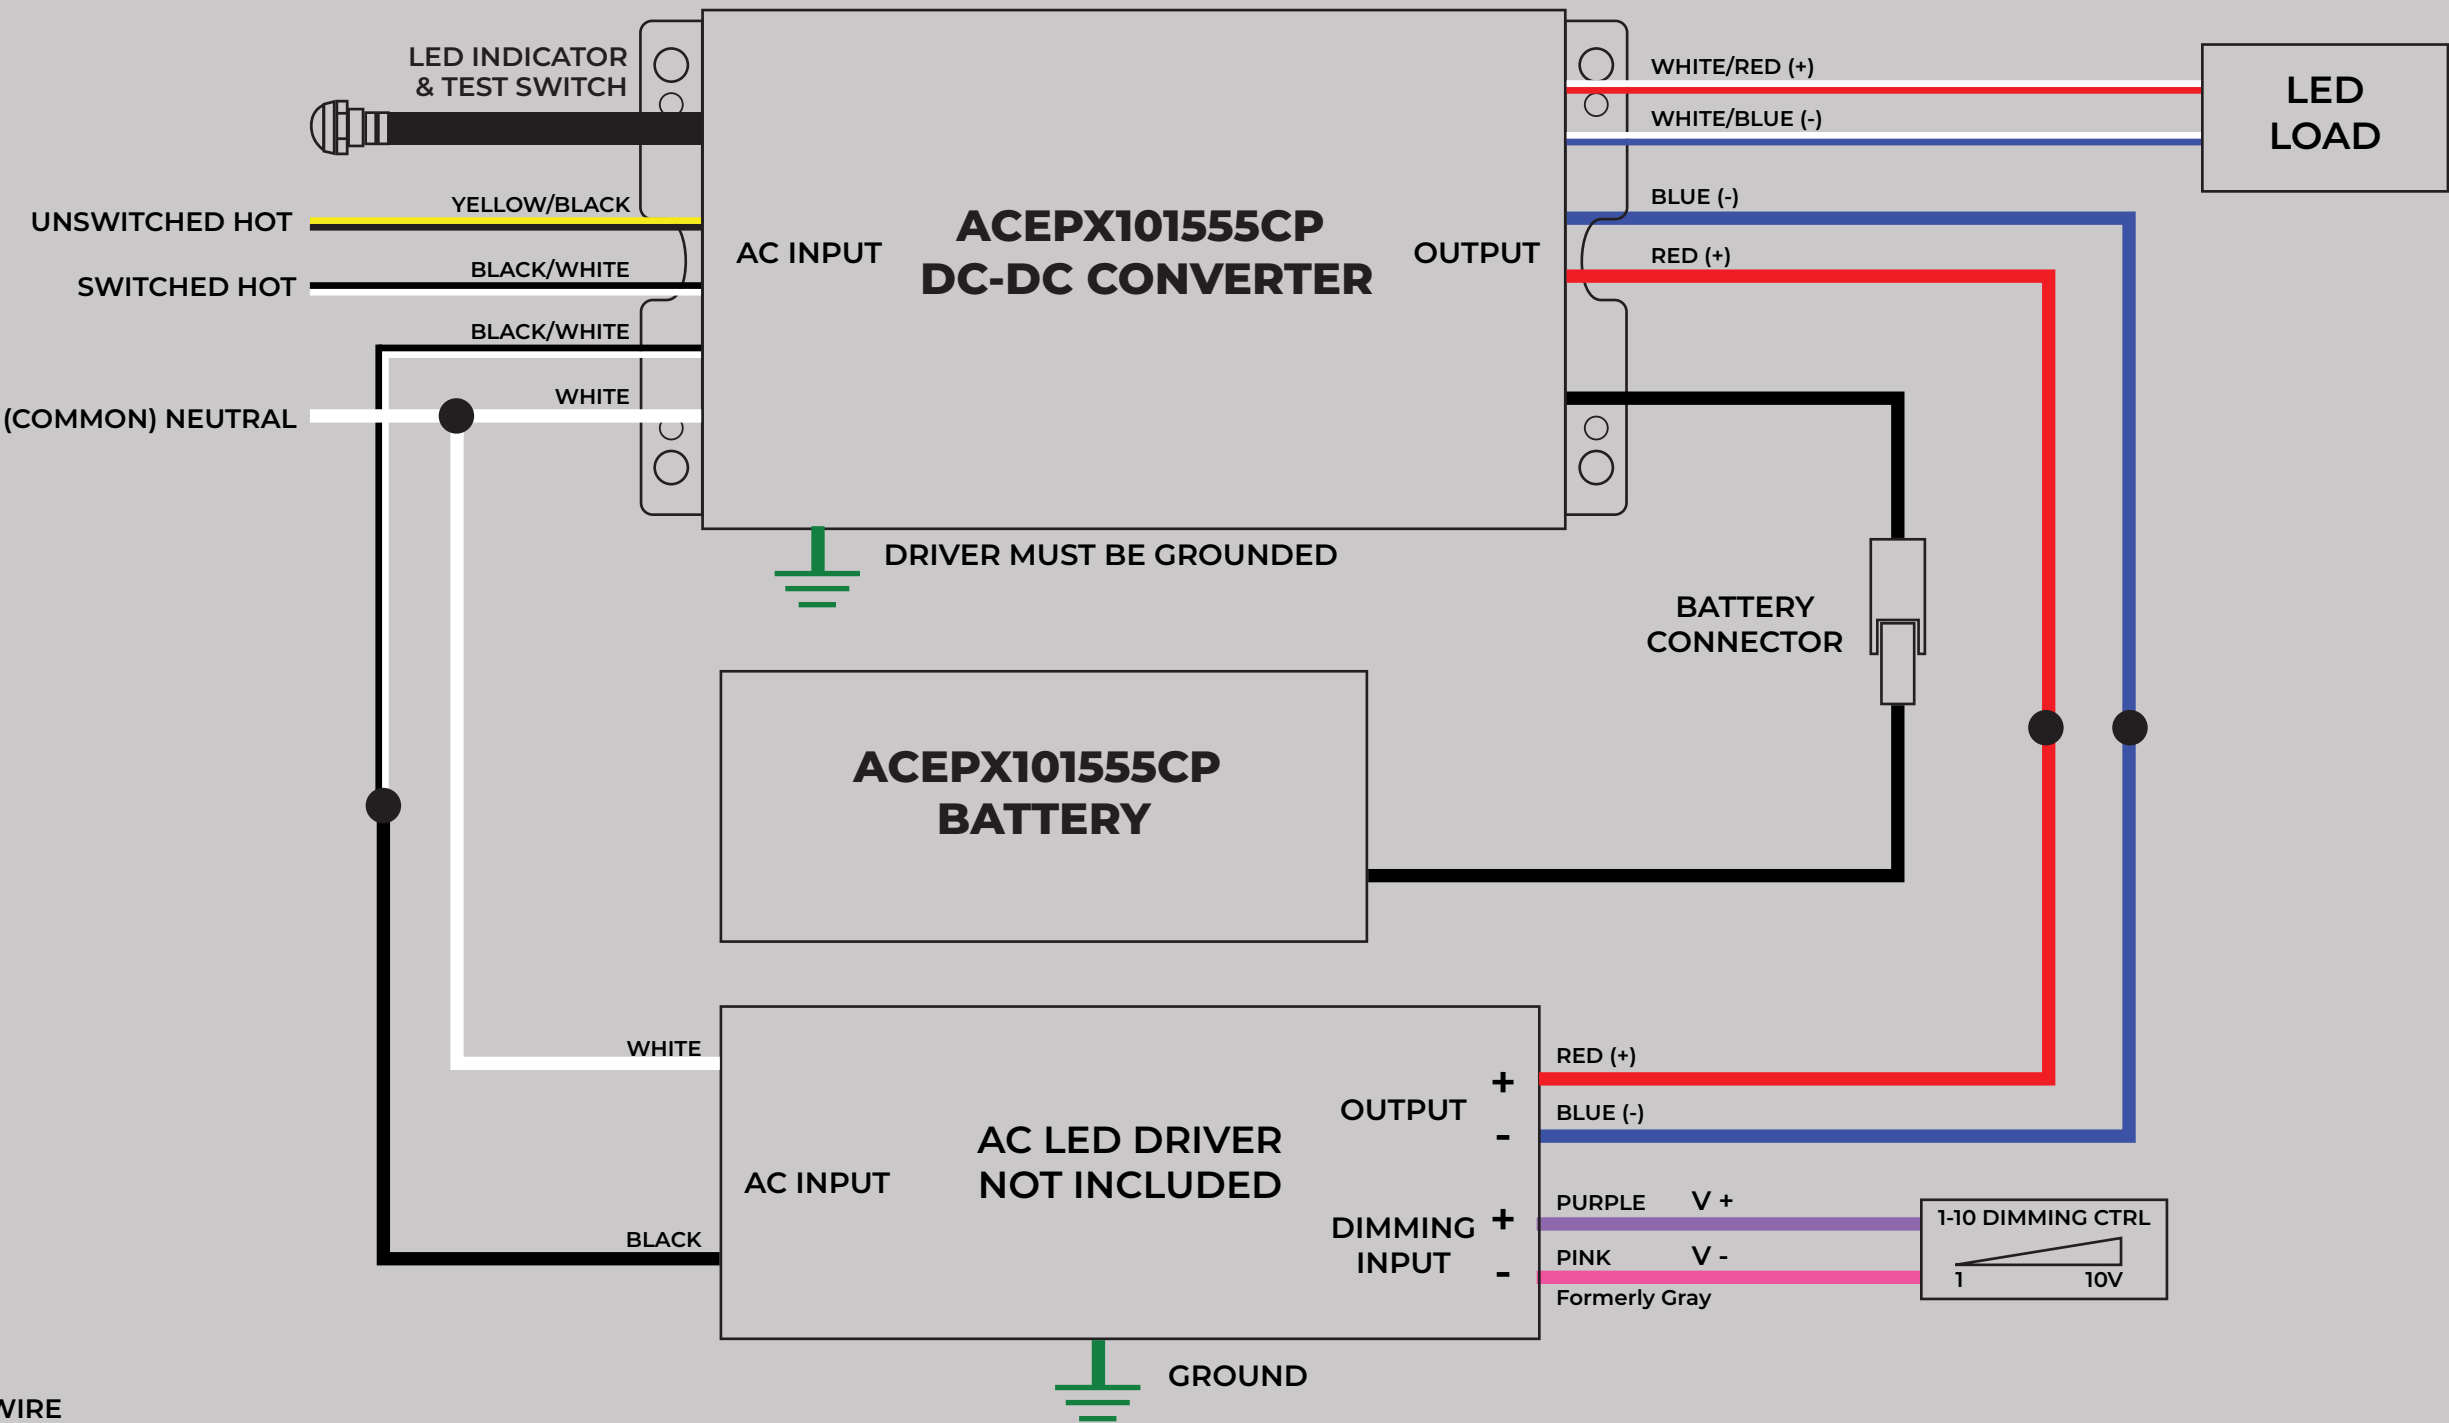

USE COPPER WIRE

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

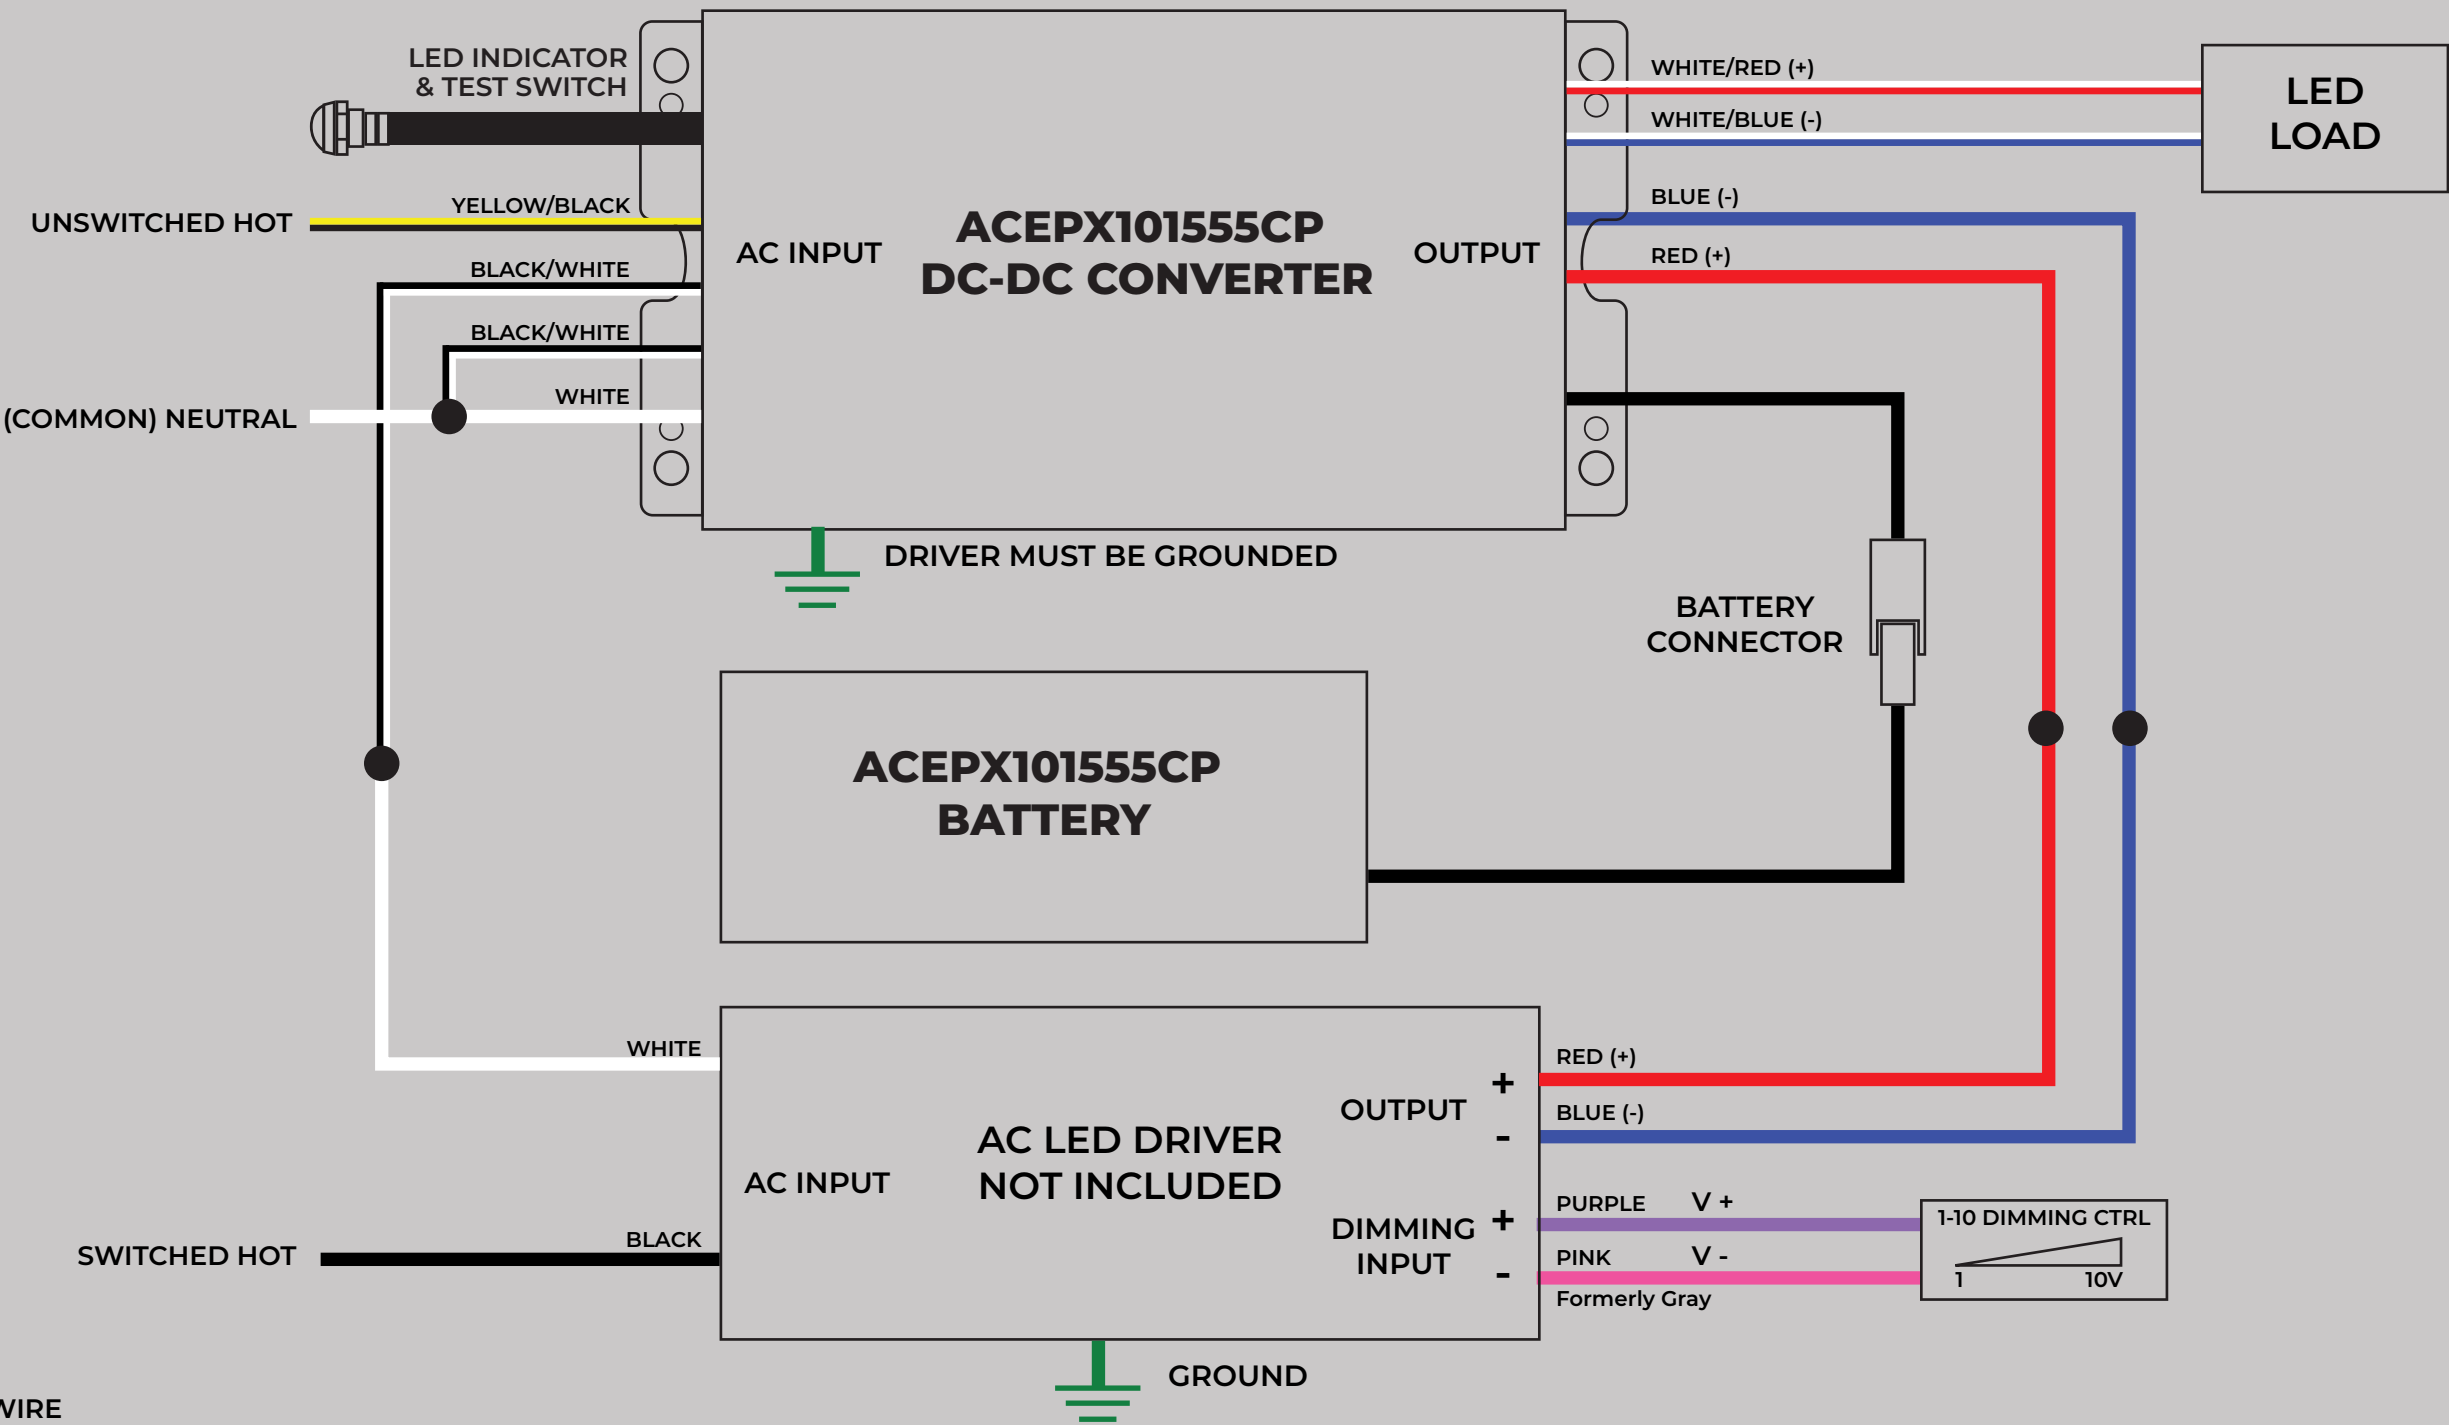

USE COPPER WIRE

DIAGRAMA DE CABLEADO ESPAÑOL

ACEPX101555CP

EMERGENCY LED DRIVER

DC-DC CONVERTER

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours

Made in Taiwan - AM1111

• Input Voltage: 120-277 V, 50/60 Hz
• Input Current (max): 110 mA
• Input Power: 8 W
• Output Voltage: 15.5 V
• Output Current: 180 mA - 670 mA
• Output Power: 10 W
• Battery Voltage: 6.4 V

• Battery Charge Current: 185 mA
• Battery Charge Time (max): 24 Hrs
• Operating Duration (min): 90 min
• Output Class 2 Compliant
• Suitable for damp locations
• For factory or field installation
• For metal enclosed wiring system

CAUTION:

See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION:

Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

POWER

UL
RECOGNIZED
COMPONENT

TAAE

ac
LEDs

800-375-6355

BATTERY

ACEPCK101555CP
EMERGENCY LED DRIVER
LiFePO₄, 6.4 V, 3300 mAh


- Battery Voltage: 6.4 V
- Battery Charge Current: 185 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min

POWER  CE

800-375-6355
 Made in Taiwan • AM136


ACE LEDS

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

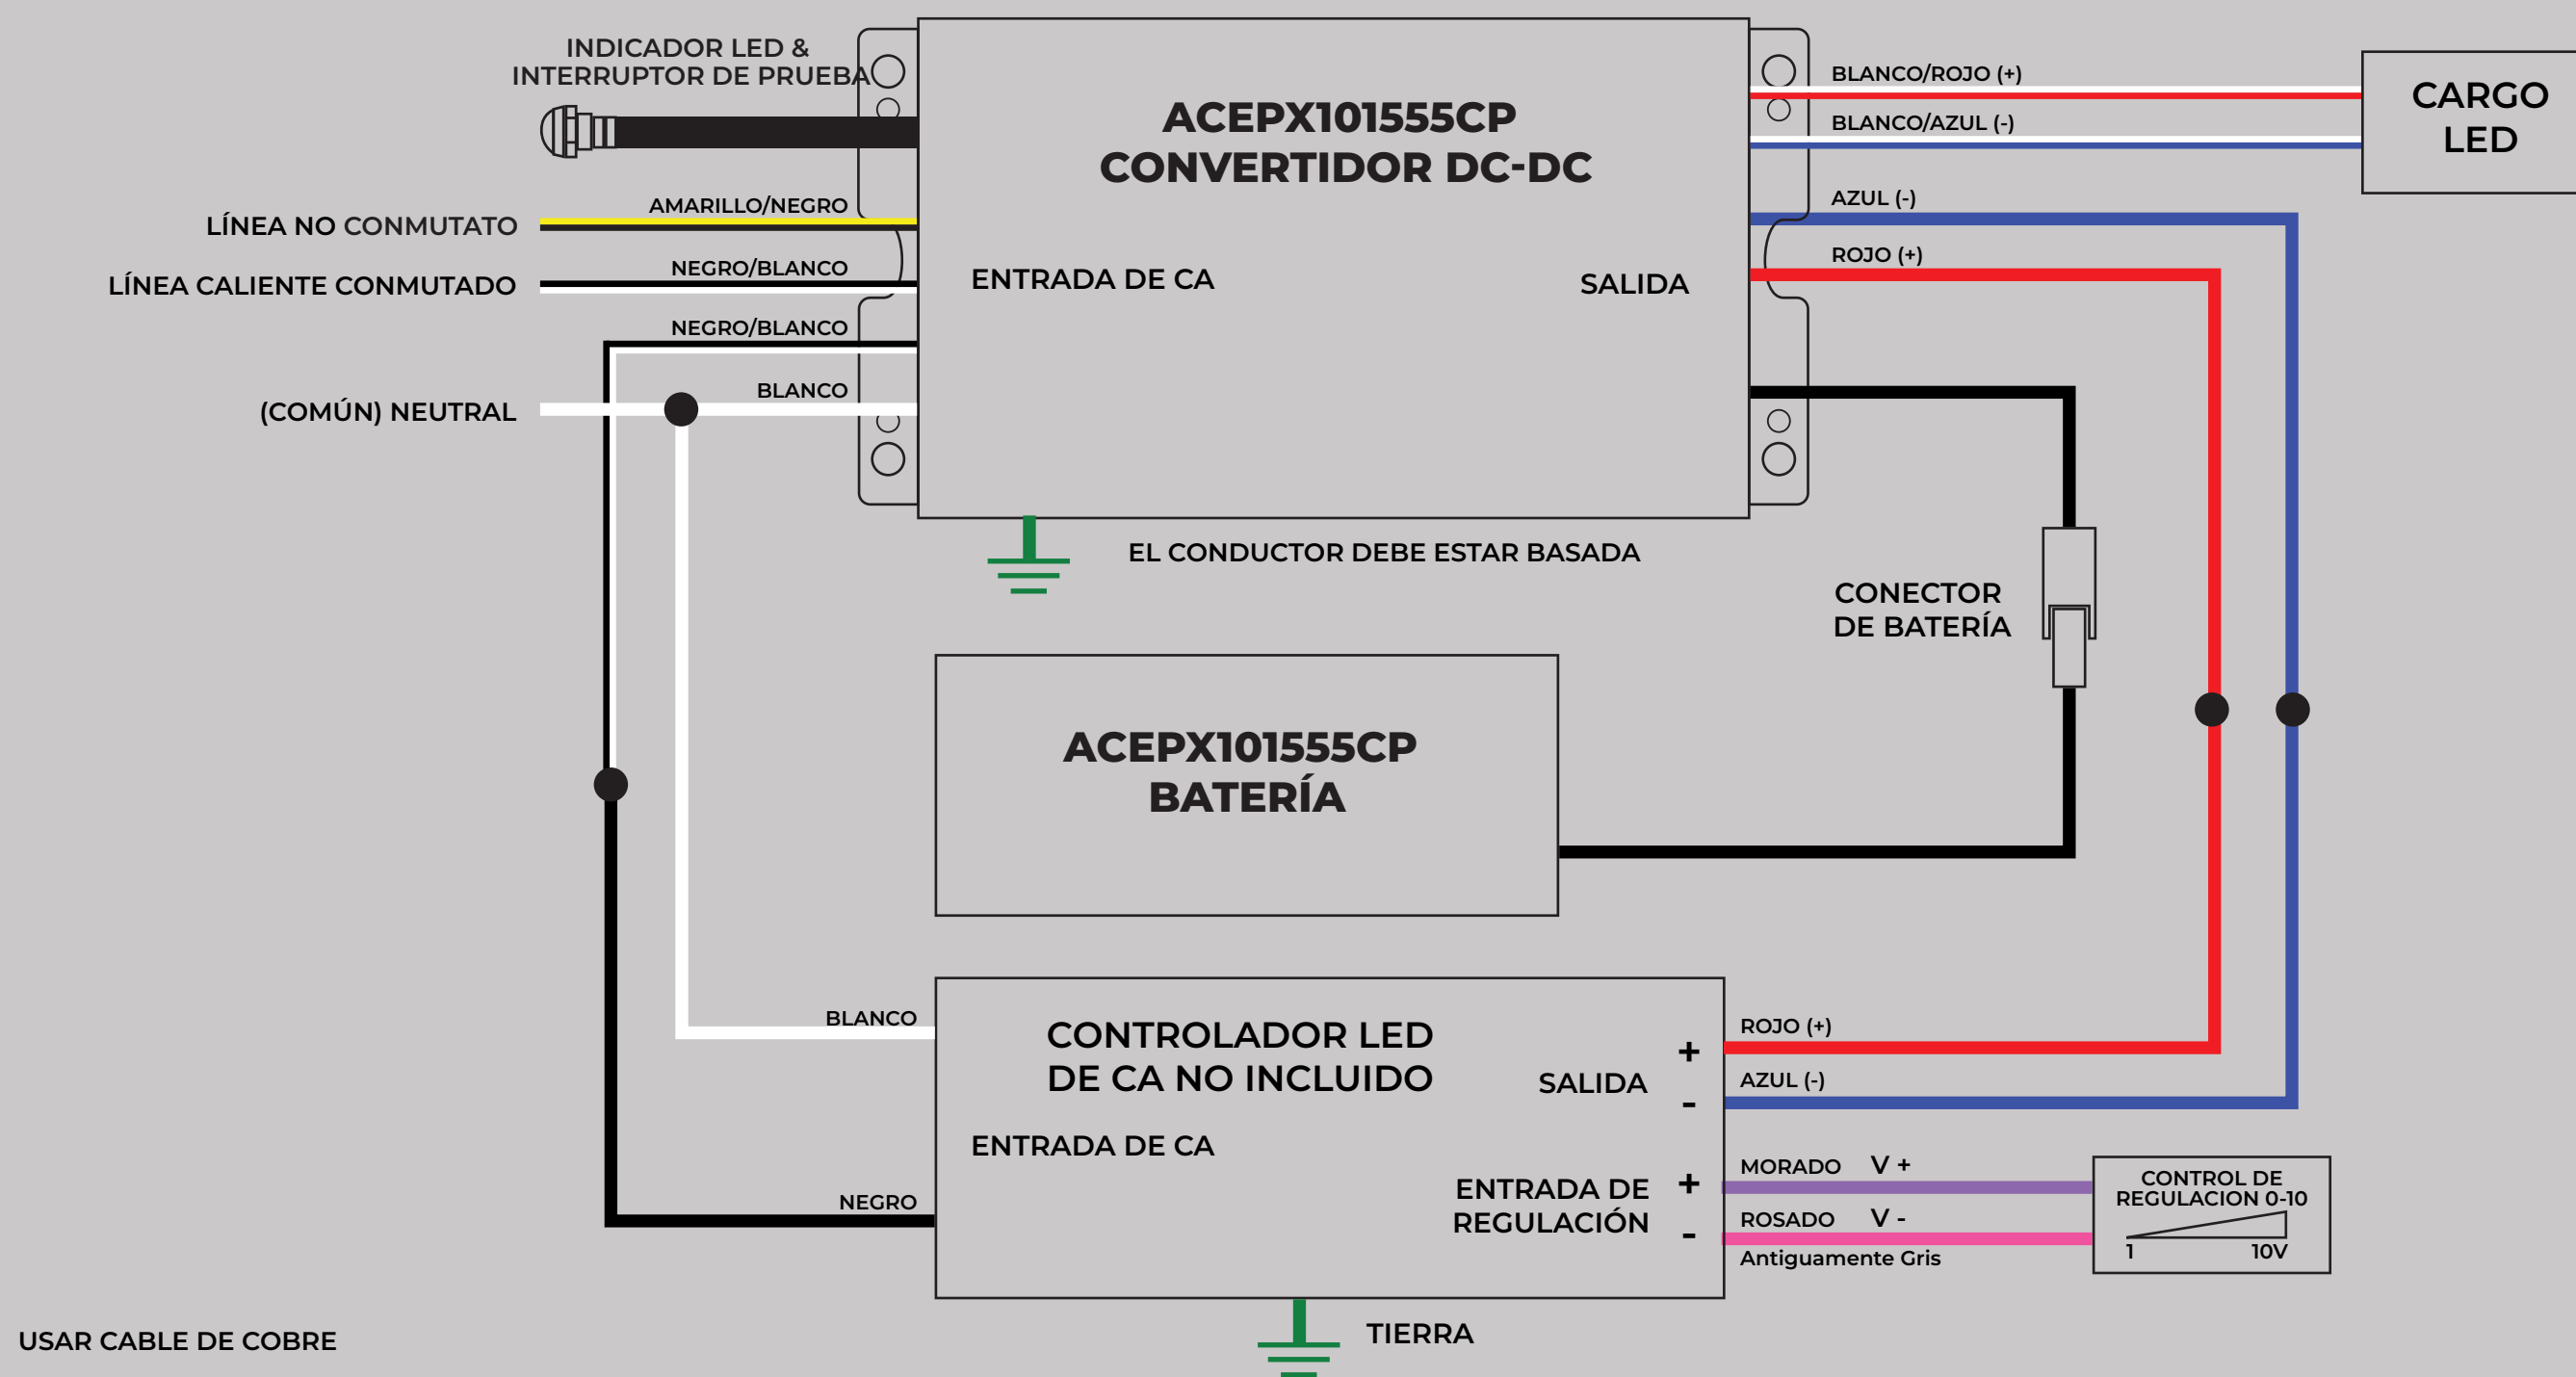

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

