

ENGLISH WIRING DIAGRAM

ACEPX10T1555CP
EMERGENCY LED DRIVER
DC-DC CONVERTER

- Input Voltage: 100-277 V, 50/60 Hz
- Input Current (max): 10 mA
- Output Voltage: 15-55 V
- Output Current: 300 mA - 670 mA
- Output Power: 10 W
- Battery Voltage: 7.2 V

CAUTION:
See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION:
Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours
Made in Taiwan - AMT11

POWER
800-375-6355
Made in Taiwan - AM136

ACE LEDS


ACEPX10T1555CP
EMERGENCY LED DRIVER
LiFePO₄, 7.2 V, 5000 mAh

- Battery Voltage: 7.2 V
- Battery Charge Current: 500 mA
- Battery Charge Time (max): 24 Hrs
- Operating Duration (min): 90 min

POWER
800-375-6355
Made in Taiwan - AM136

ACE LEDS

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

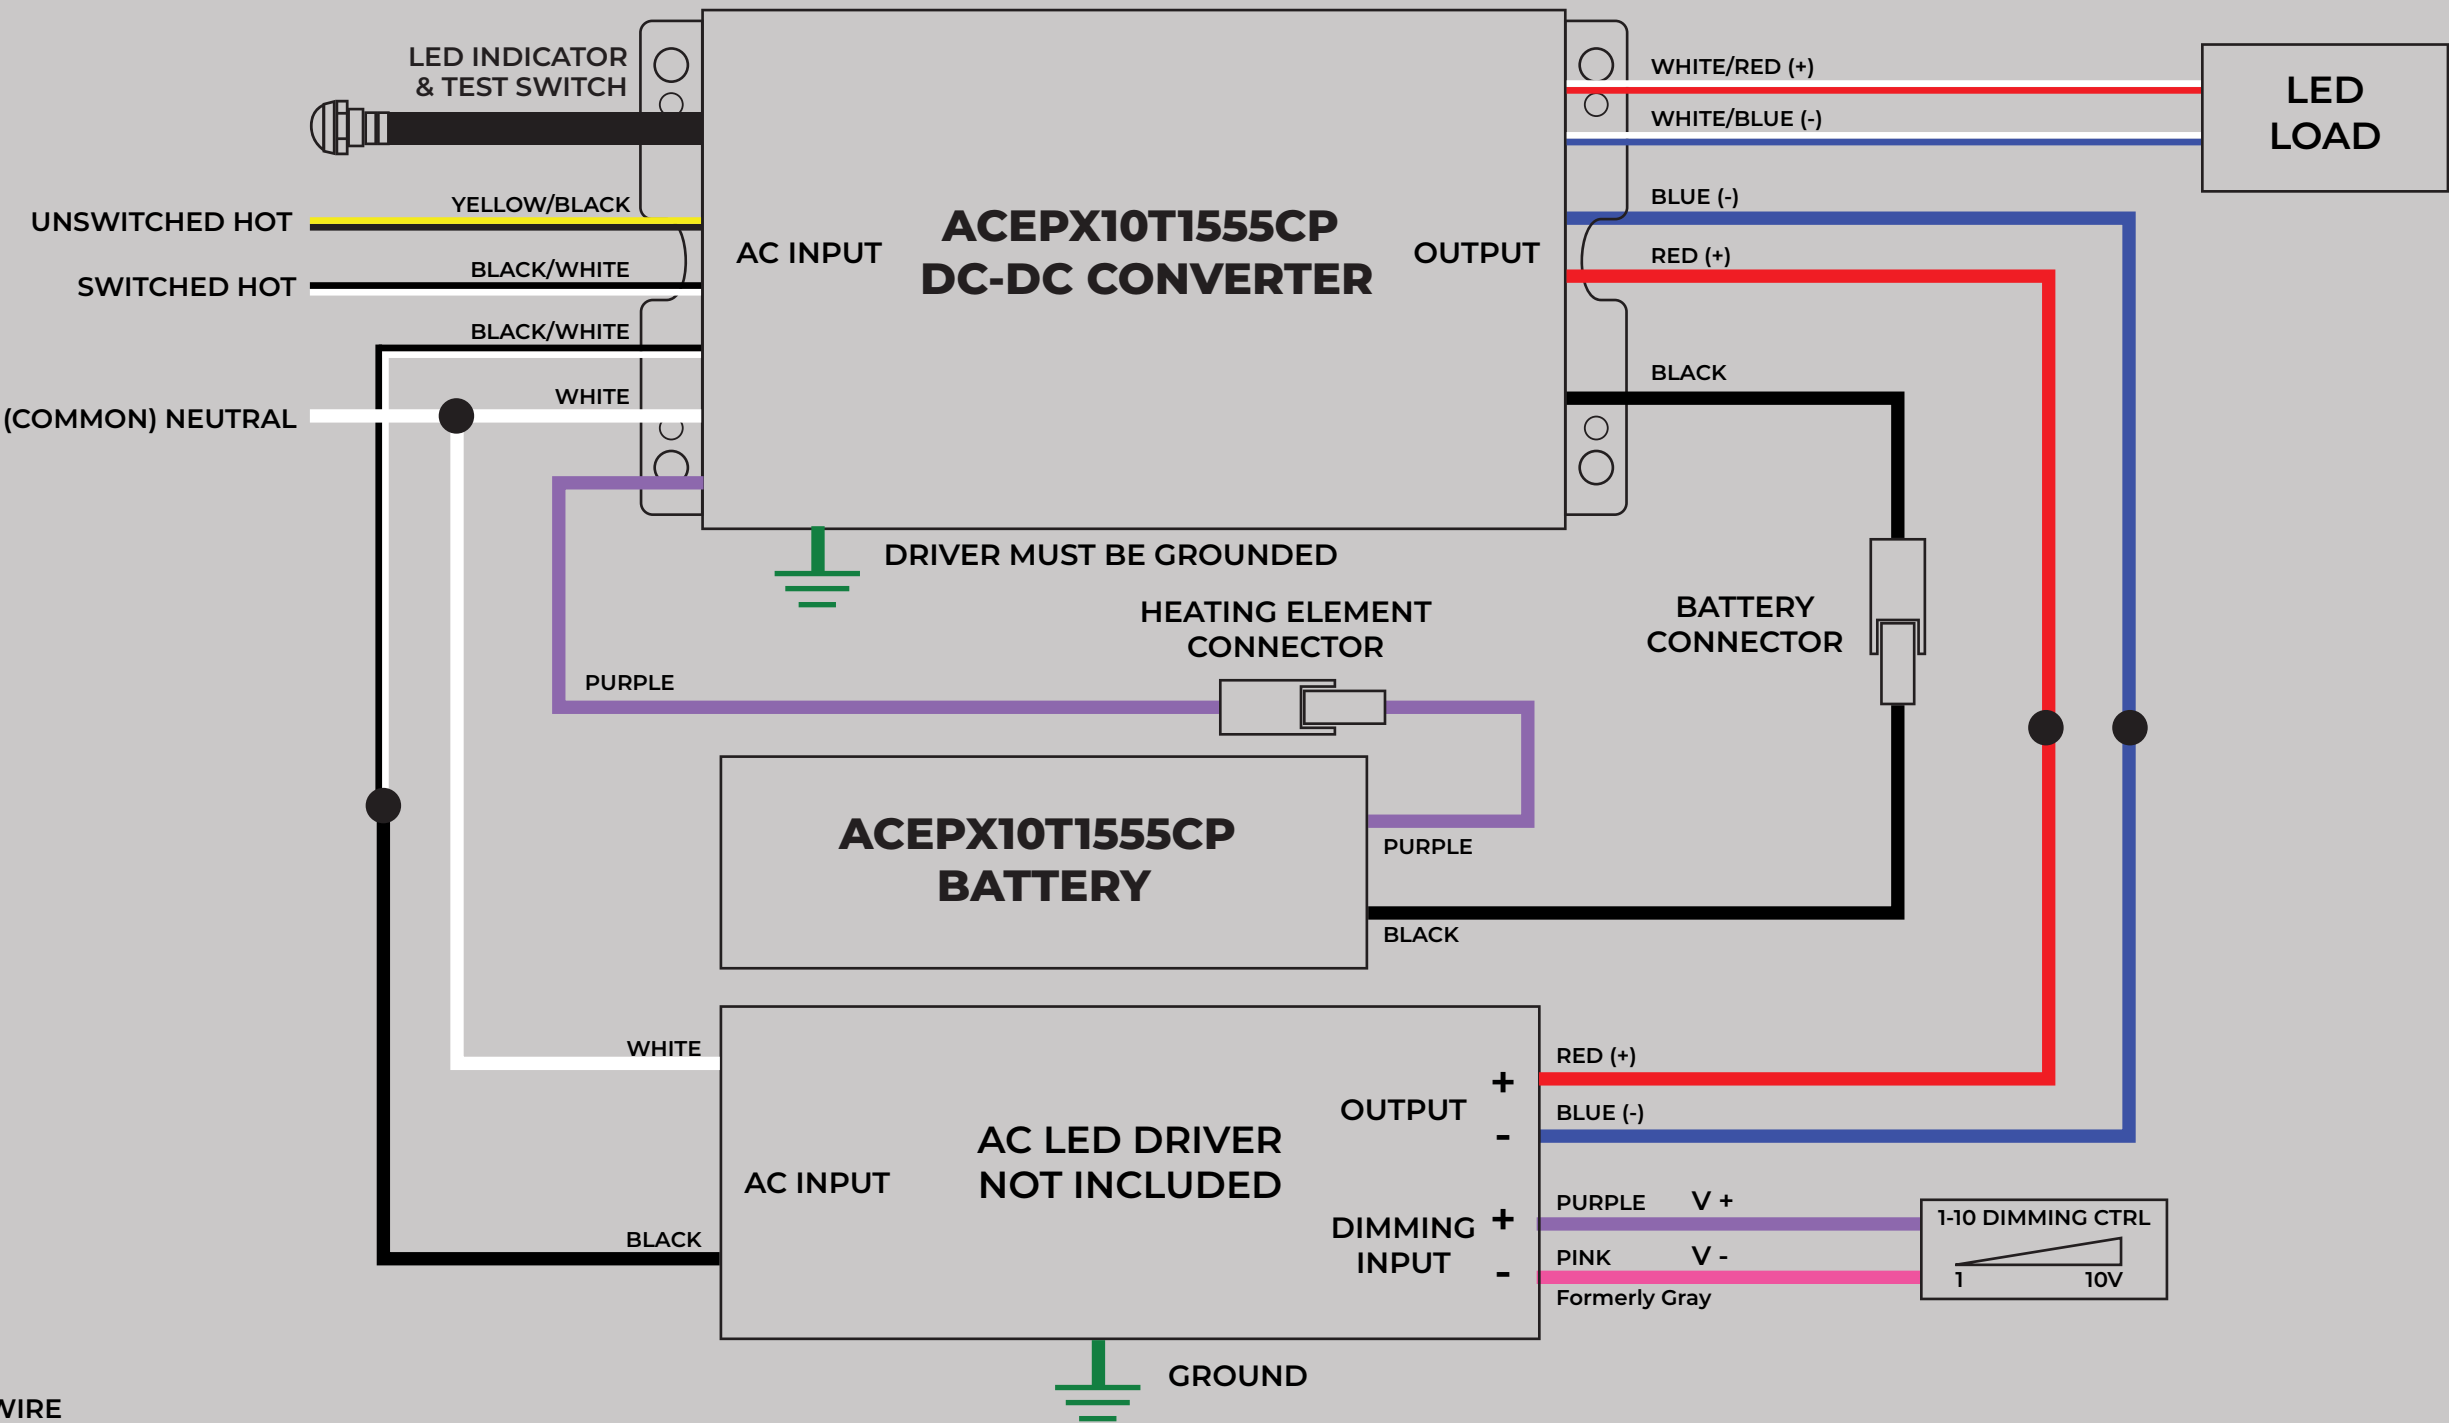

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

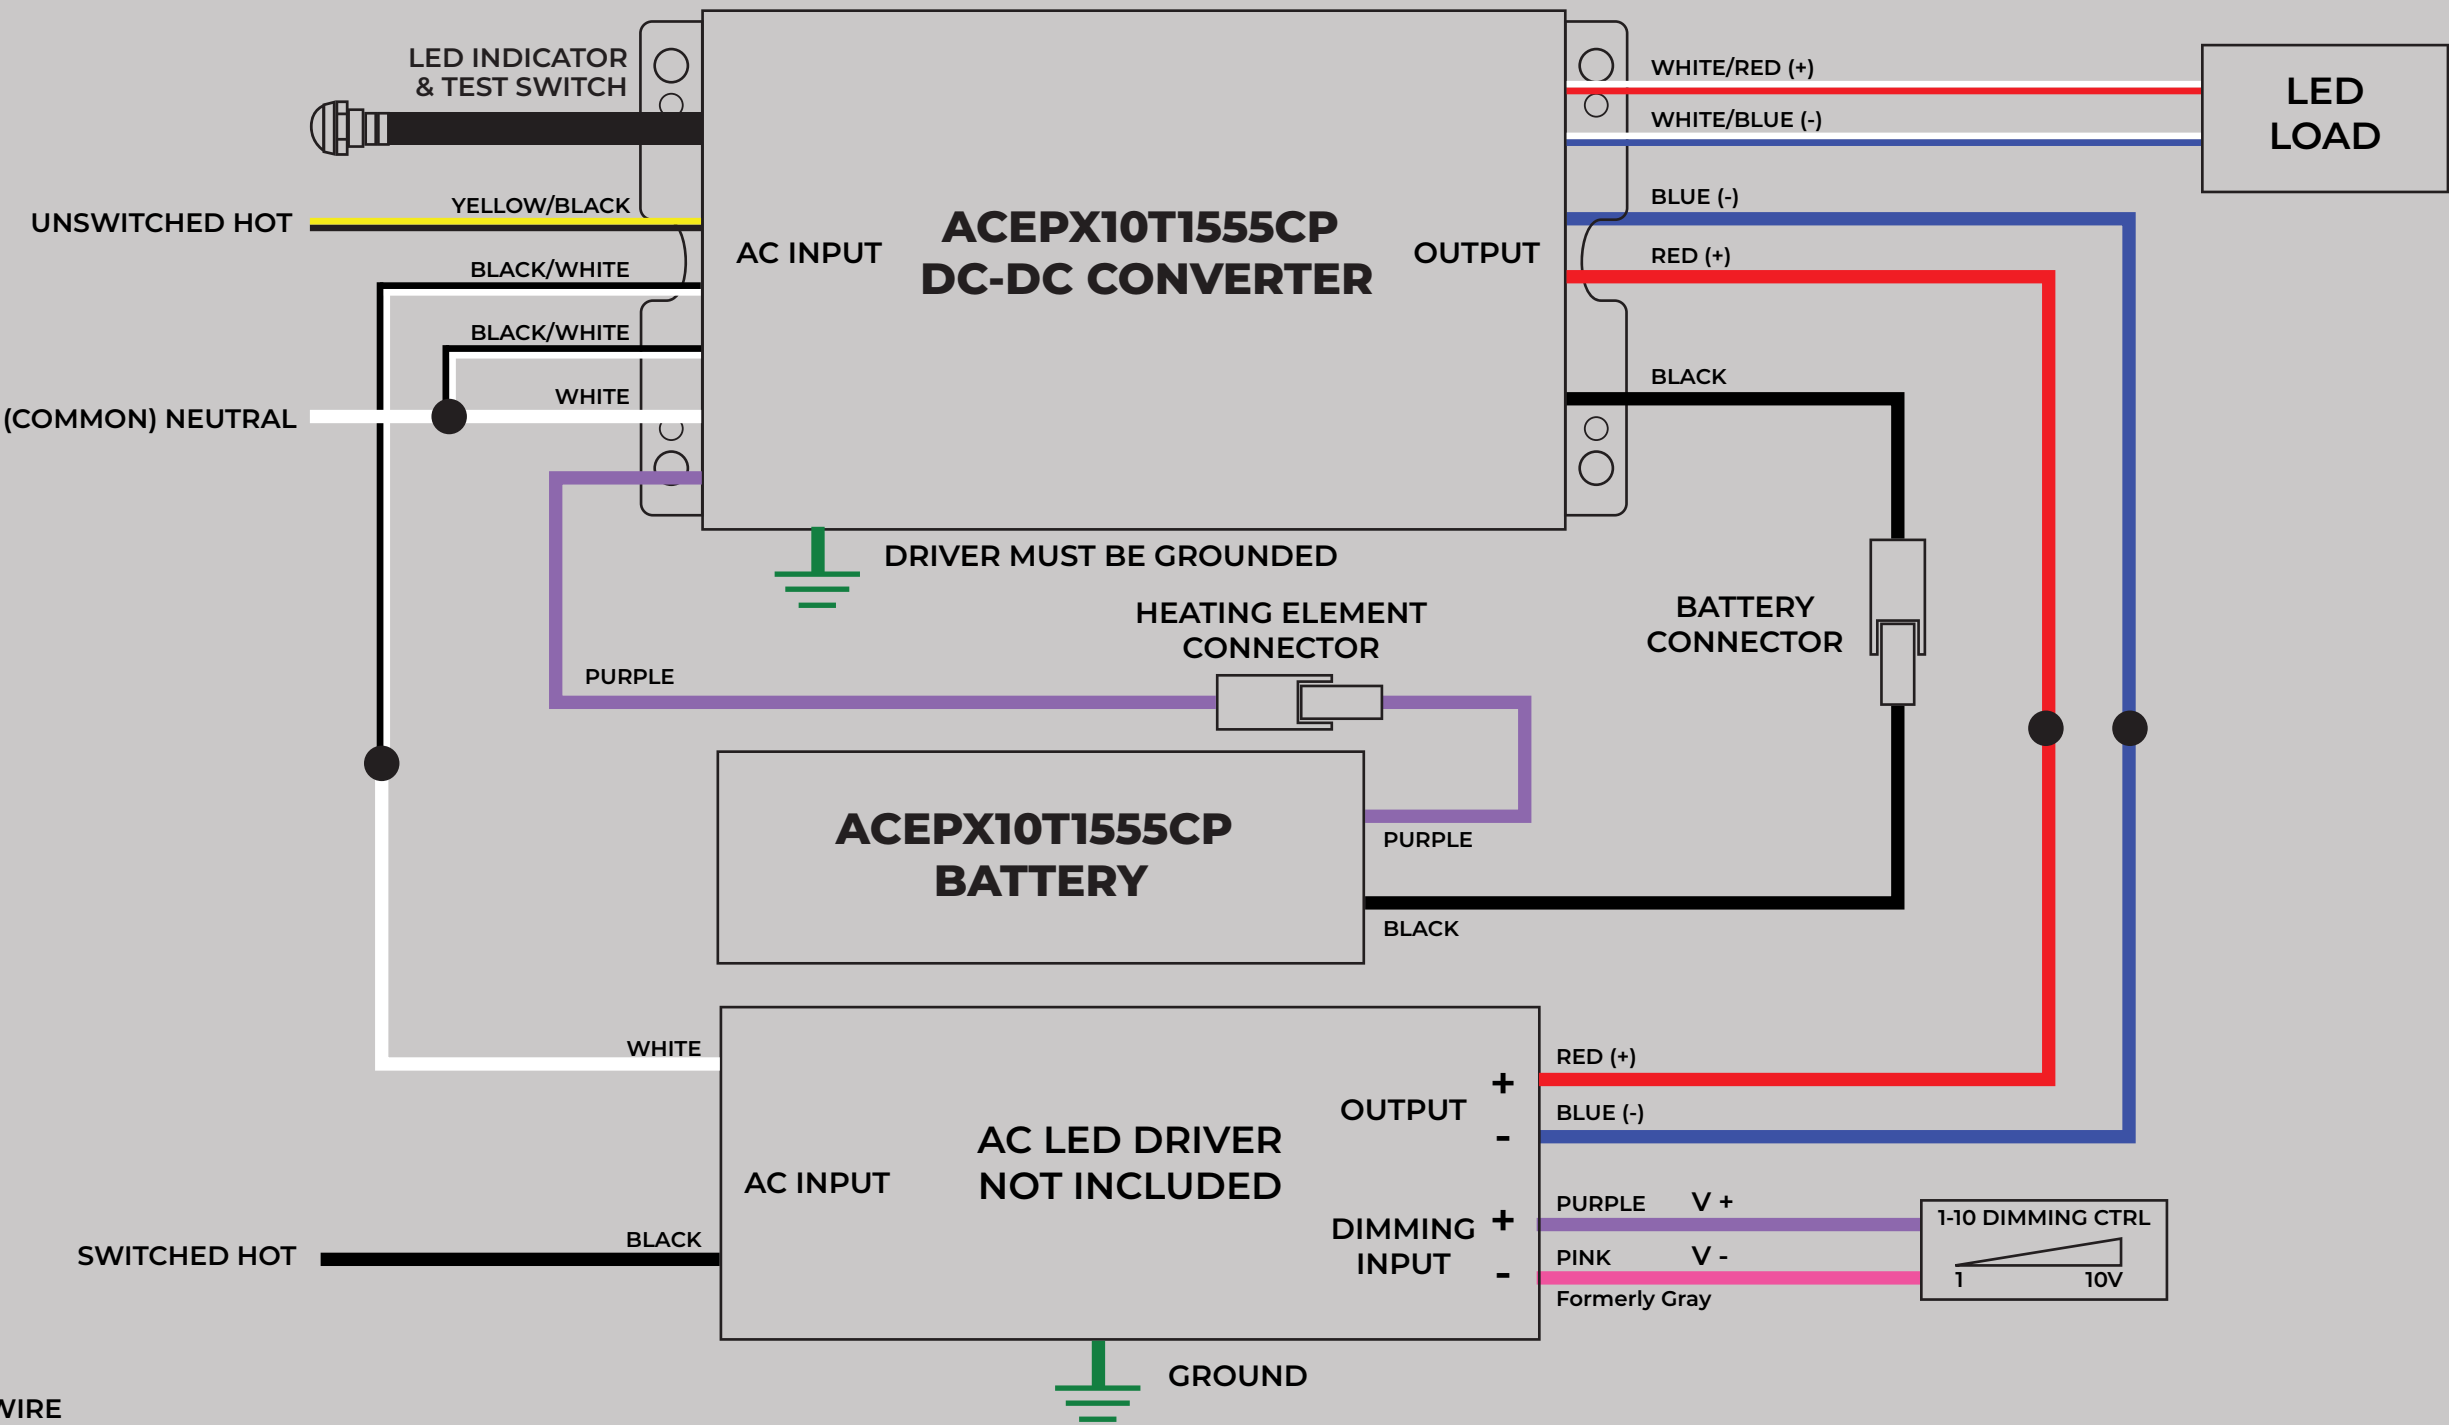


DIAGRAMA DE CABLEADO ESPAÑOL

ACEPX10T55SCP EMERGENCY LED DRIVER DC-DC CONVERTER

(T₀)

• Input Voltage: 100-277 V, 50/60 Hz

• Input Current: 140 mA

• Input Power: 8.5 W

• Output Voltage: 30-36 V

• Output Current: 180 mA ~ 670 mA

• Output Power: 10 W

• Battery Voltage: 7.2 V

• Battery Charge Time: 500 mA

• Battery Charge Time (min): 2-10 hrs

• Operating Duration (min): 90 min

• Output Class: 2C Compliant

• Suitable for: for diaphrag locations

• For factory or field installation

• For metal enclosed and open system

CAUTION:
See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel (QEP). De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION:
Not suitable for air-handling or heated air outlets.

BATTERY

ACEPX10T55SCP EMERGENCY LED DRIVER LiFePO₄, 7.2 V, 5000 mAh

• Battery Voltage: 7.2 V

• Battery Charge Time: 500 mA

• Battery Charge Time (min): 2-10 hrs

• Operating Duration (min): 90 min

• Battery Voltage: 7.2 V

• Battery Charge Time: 500 mA

• Battery Charge Time (min): 2-10 hrs

• Operating Duration (min): 90 min


USE COPPER WIRE

POWER **CE** **C-Id Start** **800-375-6355**

800-375-6355

Made in Taiwan - AMT35

A. DIAGRAMA DE CABLEADO TÍPICO PARA LA CONMUTACIÓN DE LA CORRIENTE CALIENTE CONMUTADA DE CA PARA EL CONTROLADOR DE LED DE CA NORMAL.

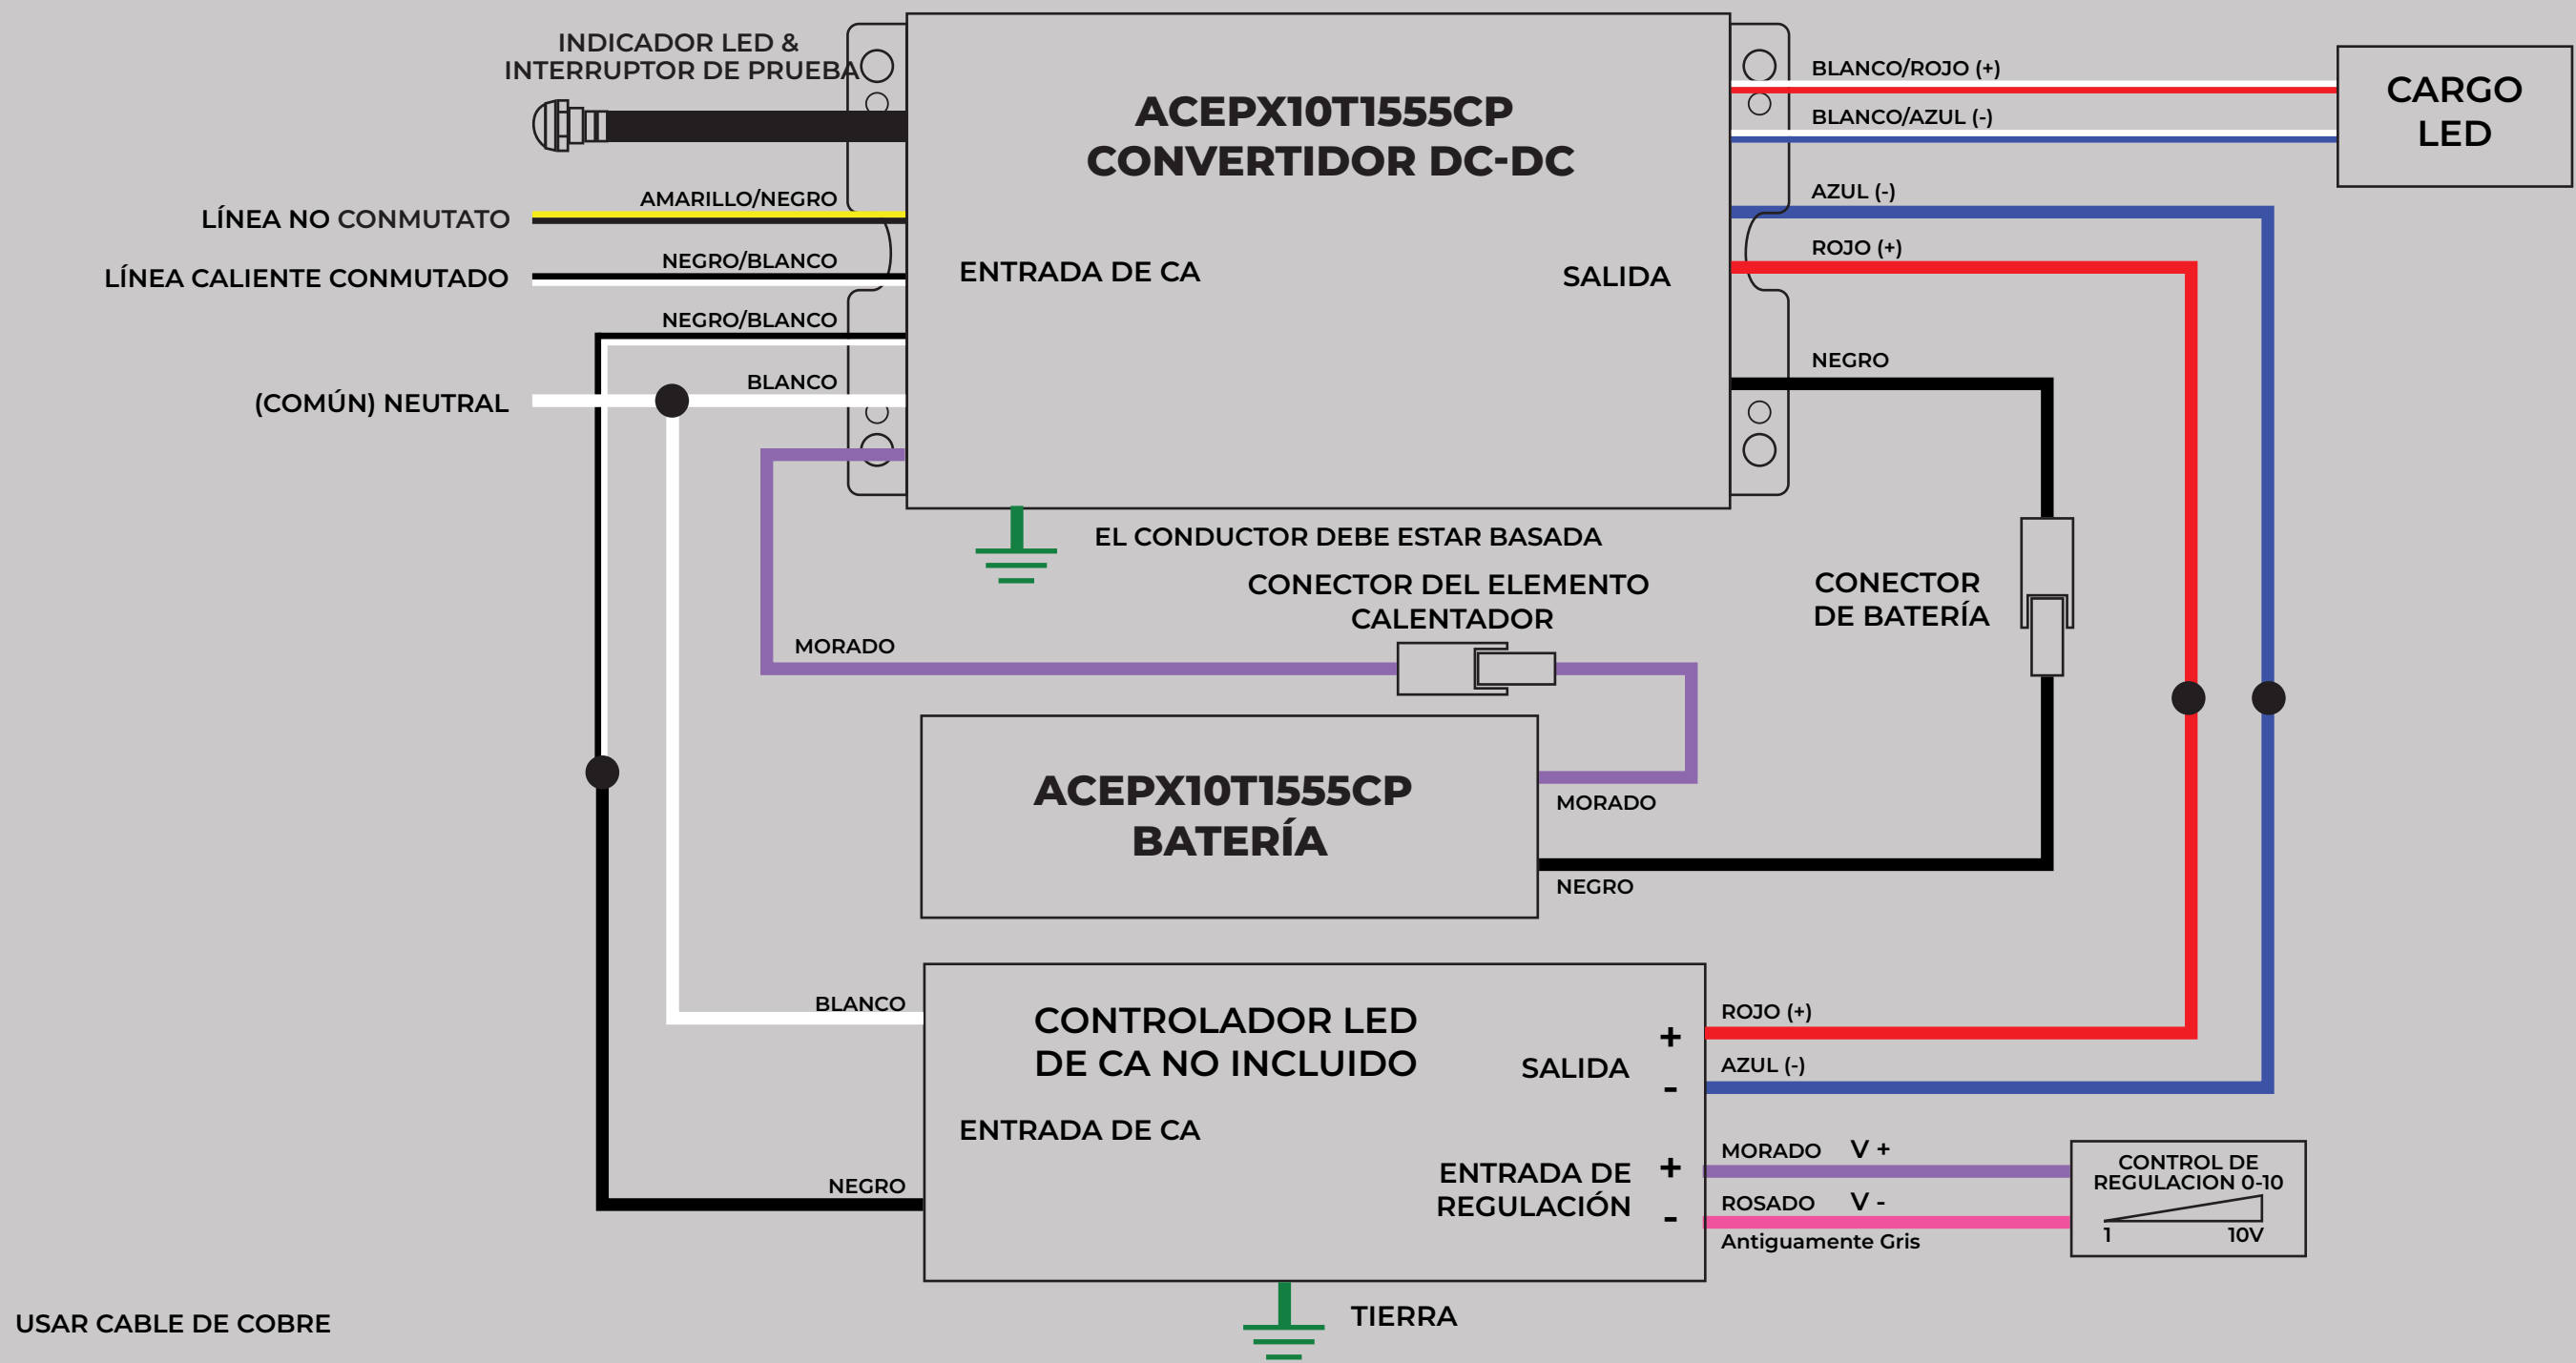

B. DIAGRAMA DE CABLEADO TÍPICO PARA CAMBIAR EL CABLE NEUTRAL DEL CONTROLADOR DE LED DE CA NORMAL.

