



A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

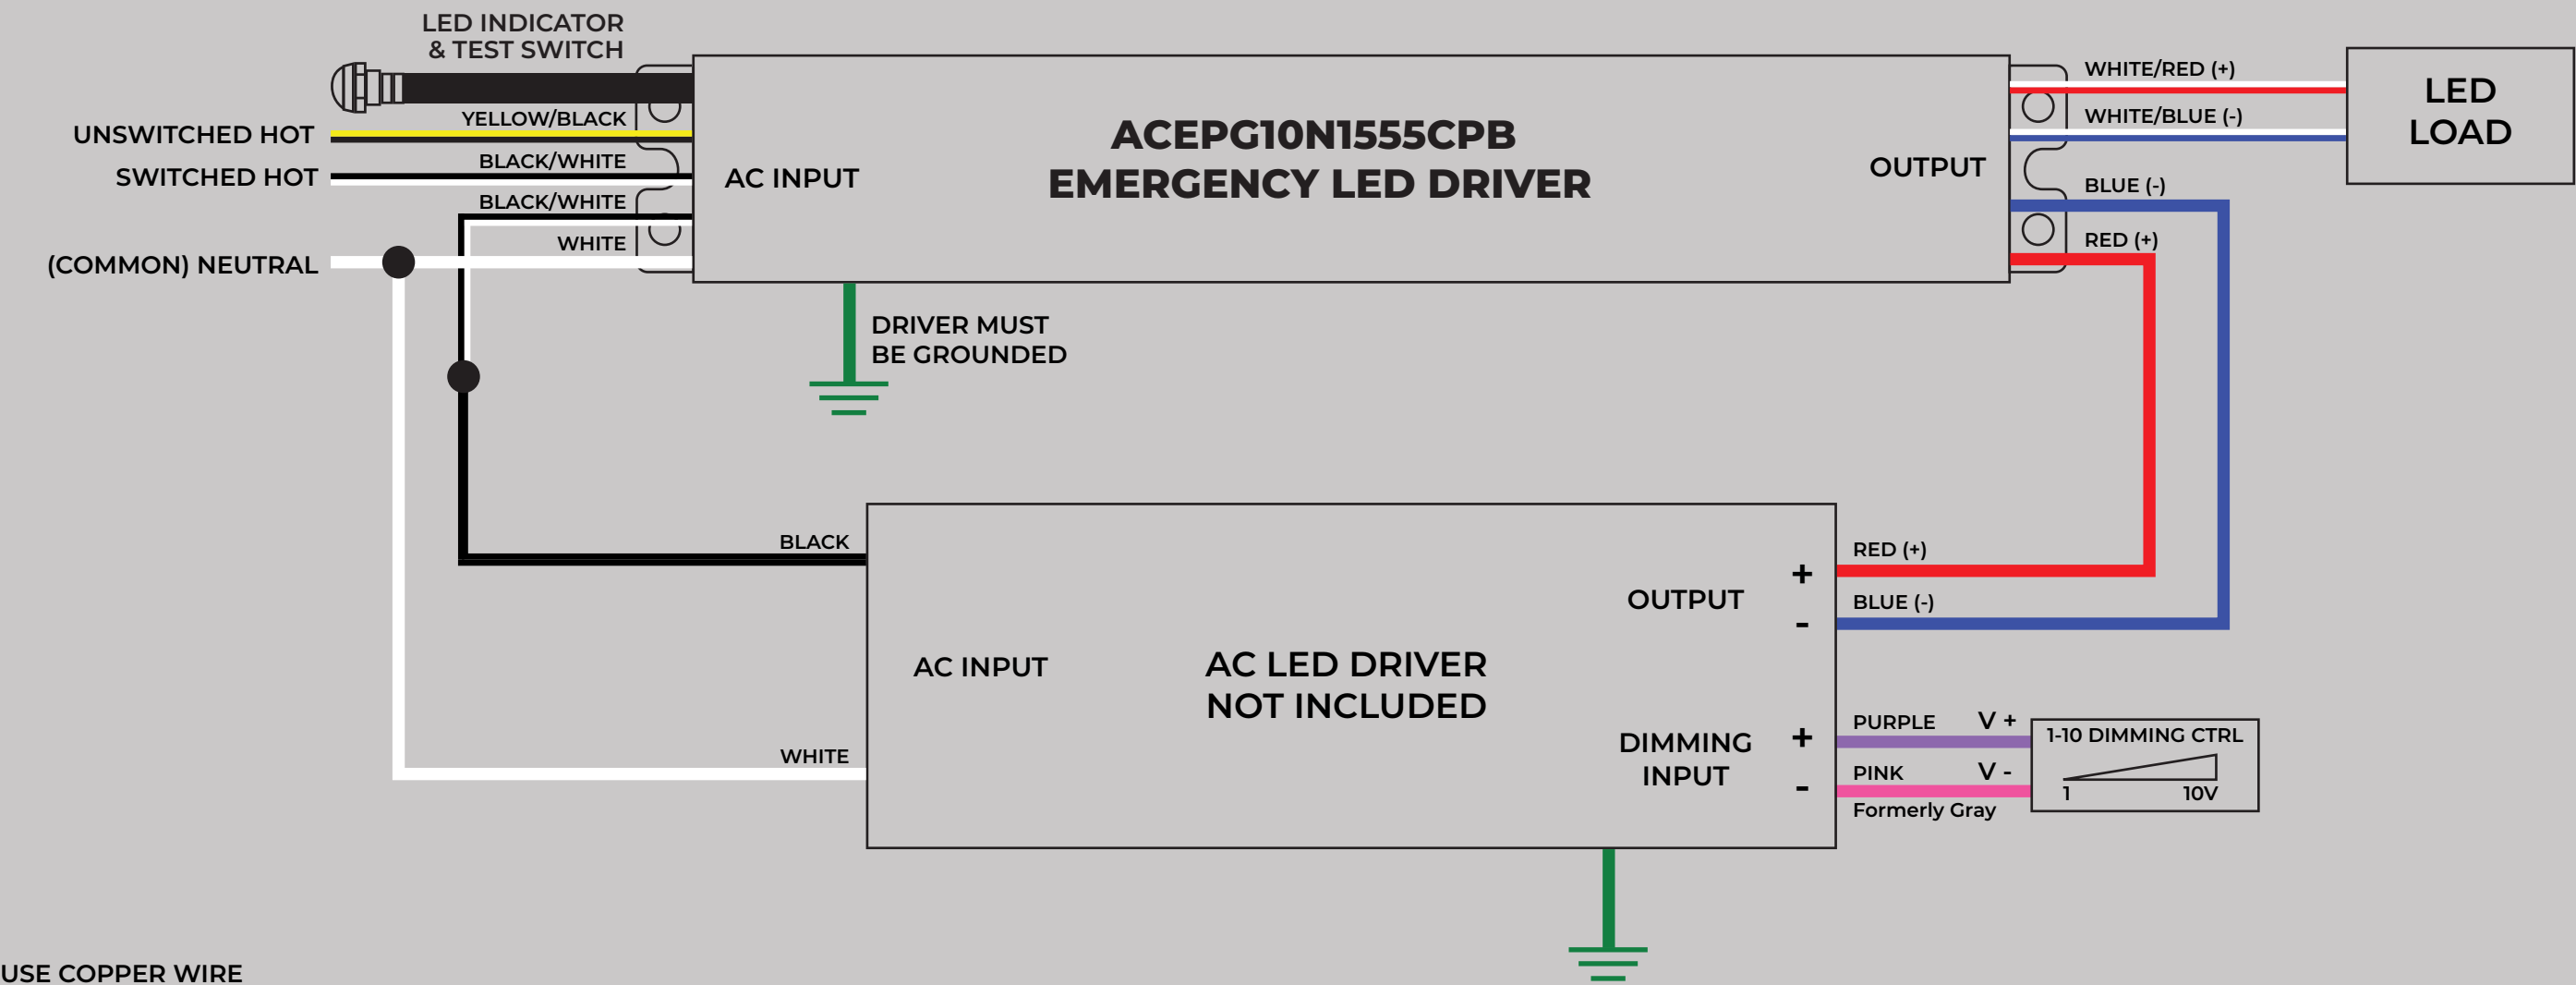

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

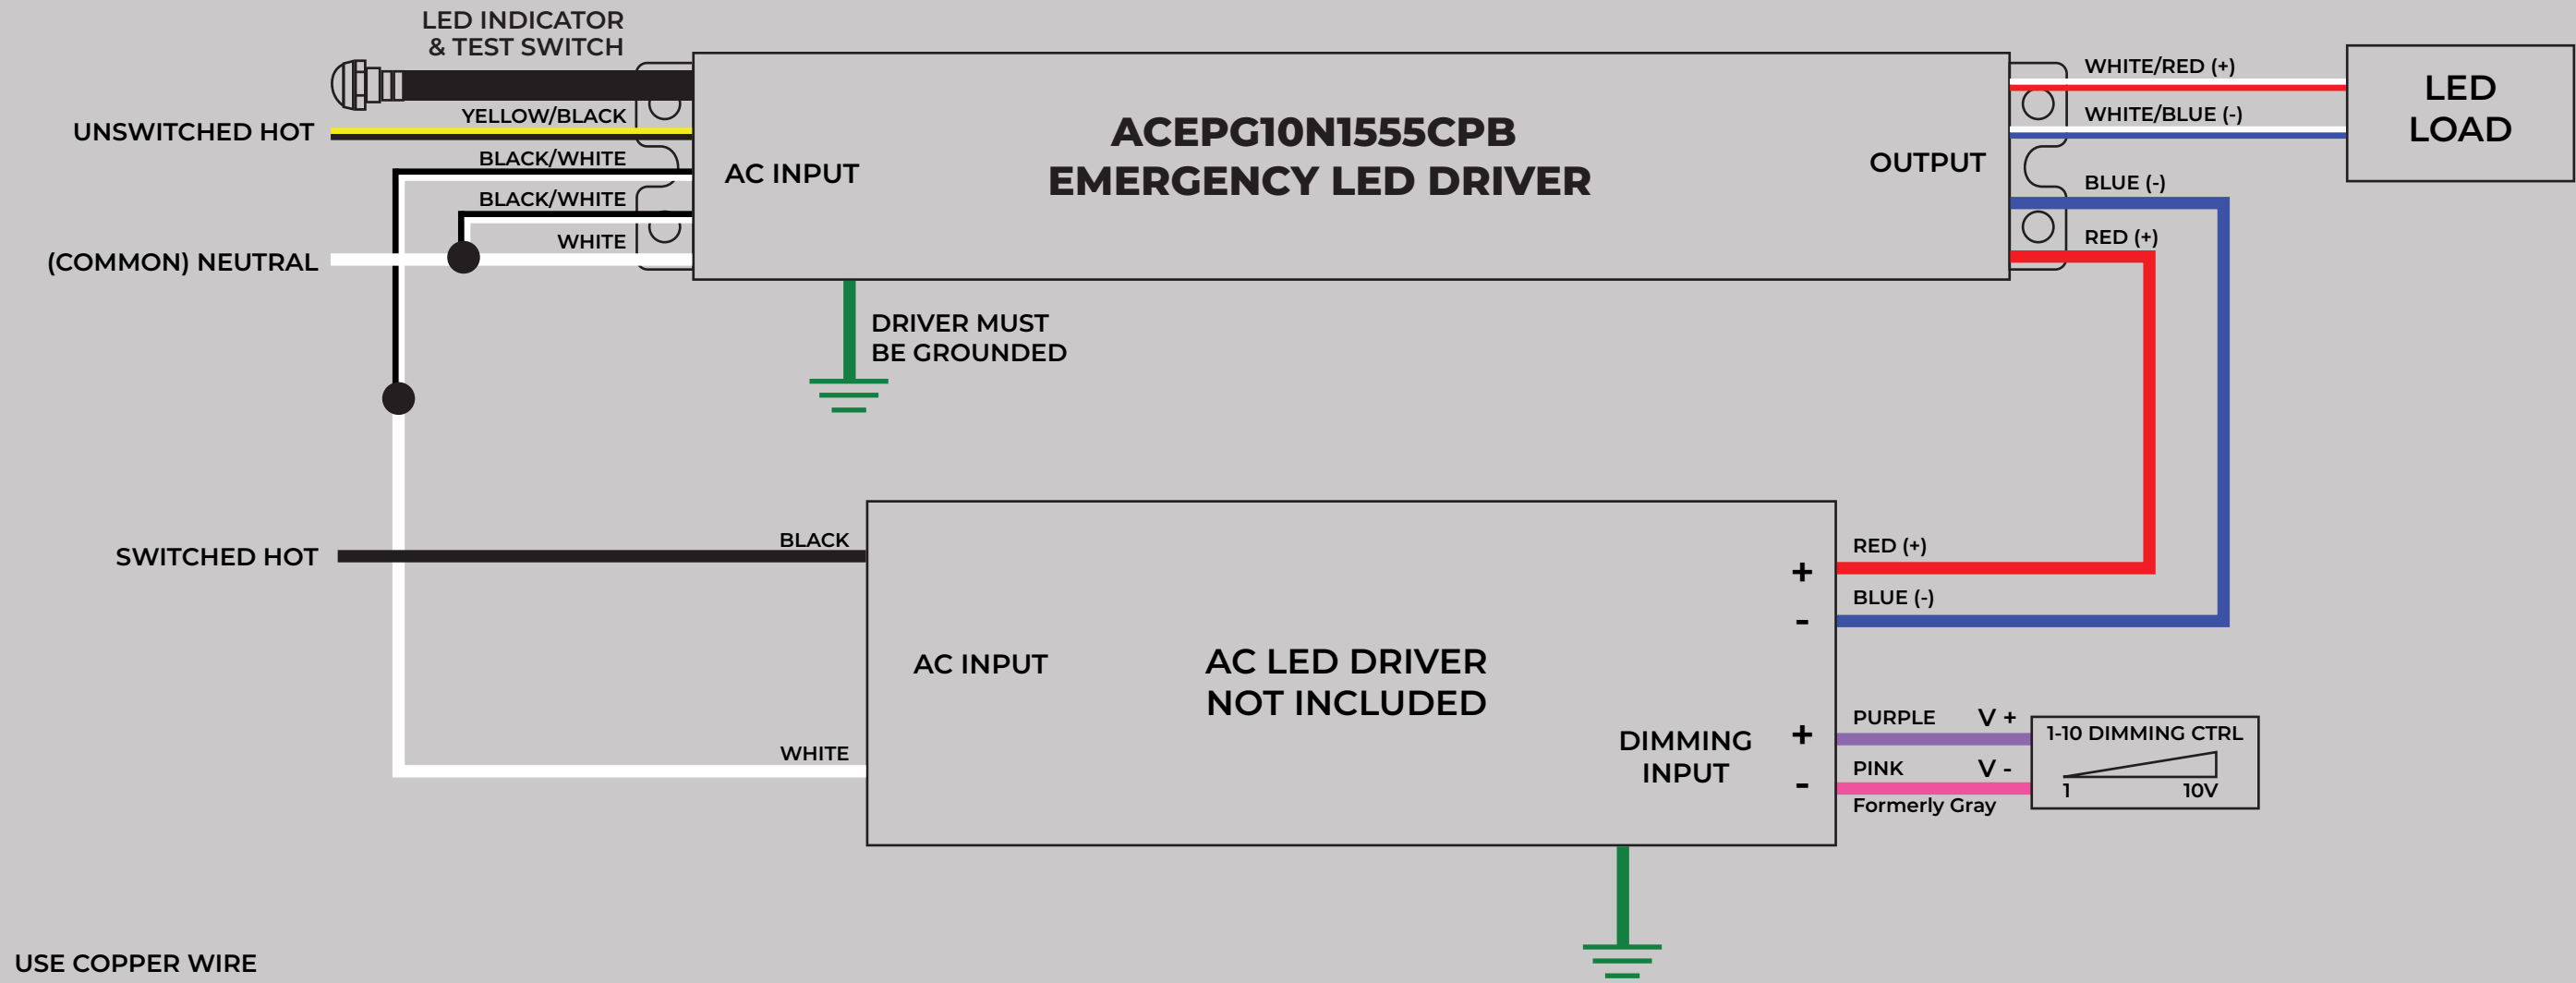

The Rail™

ACEPG101555CPB LINEAR EMERGENCY LED DRIVER®

• Input Voltage: 120-247 V, 50/60 Hz • Input Current (max): 110 mA • Input Power: 8 W • Output Voltage: 15.5V	• Output Current: 100 mA ~ 670 mA • Output Power: 10 W • Battery Voltage: 6 V • Battery Charge Current: 185 mA	• Battery Charge Time (max): 24 Hours • Operating Duration (min): 90 Minutes • Ambient Temperature: 0~55 °C • Output Class: C-CLASS	• Suitable for damp locations • For factory or field installation • For metal enclosed wiring system
--	---	--	--

CAUTION: See Instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only! De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

CSA C22.2 No. 147
 Emergency Lighting Equipment
 Appareil d'éclairage de secours

ACE LED
 800-375-6355

Made in Taiwan • AM22Z

USE COPPER WIRE

INDICADOR LED & INTERRUPTOR DE PRUEBA

LÍNEA NO CONMUTATO

LÍNEA CALIENTE CONMUTADO

(COMÚN) NEUTRAL

AMARILLO/NEGRO

NEGRO/BLANCO

NEGRO/BLANCO

BLANCO

ENTRADA DE CA

ACEPG10N1555CPB EL CONDUCTOR LED DE EMERGENCIA

EL CONDUCTOR DEBE ESTAR BASADA

NEGRO

BLANCO

ENTRADA DE CA

CONTROLADOR LED DE CA NO INCLUIDO

ENTRADA DE REGULACIÓN

SALIDA

ROJO (+)

AZUL (-)

ROJO (+)

AZUL (-)

MORADO V +

ROSADO V -

Antiguamente Gris

CONTROL DE REGULACIÓN 0-10V

1 10V

USAR CABLE DE COBRE

BLANCO/ROJO (+)

BLANCO/AZUL (-)

ROJO (+)

AZUL (-)

CARGO LED

INDICADOR LED & INTERRUPTOR DE PRUEBA

LÍNEA NO CONMUTATO

(COMÚN) NEUTRAL

LÍNEA CALIENTE CONMUTADO

USAR CABLE DE COBRE

ACEPG10N1555CPB EL CONDUCTOR LED DE EMERGENCIA

ENTRADA DE CA

EL CONDUCTOR DEBE ESTAR BASADA

SALIDA

BLANCO/ROJO (+)

BLANCO/AZUL (-)

AZUL (-)

ROJO (+)

CARGO LED

CONTROLADOR LED DE CA NO INCLUIDO

ENTRADA DE CA

SALIDA

ROJO (+)

AZUL (-)

ENTRADA DE REGULACIÓN

MORADO V +

ROSADO V -

Antiguamente Gris

CONTROL DE REGULACION 0-10

1 10V