

ENGLISH WIRING DIAGRAM

**ACEPH61555BEPWO
EMERGENCY LED DRIVER**

• Input Voltage: 120-277 V, 50/60 Hz
• Input Current: (max) 10 mA
• Input Power: 8 W
• Output Voltage: 16-65 V
• Output Current: 100 mA ~ 400 mA
• Output Power: 1 W
• Battery Voltage: 7.2 V
• Battery Charge Current: 185 mA
• Battery Charge Time (max): 24 Hours
• Operating Duration (min): 90 Minutes
• Ambient Temperature: 0 °C ~ 55 °C
• Output Class: 2 Compliant
• Suitable for damp locations
• For factory or field installation
• For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

USE COPPER WIRE

POWER

CE


TAA

800-375-6355

120-0222 Rev. 1-21
Emergency Lighting Equipment
Approved for Bridge use only
Made in Taiwan - AM123HO


ACE LEDS

A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

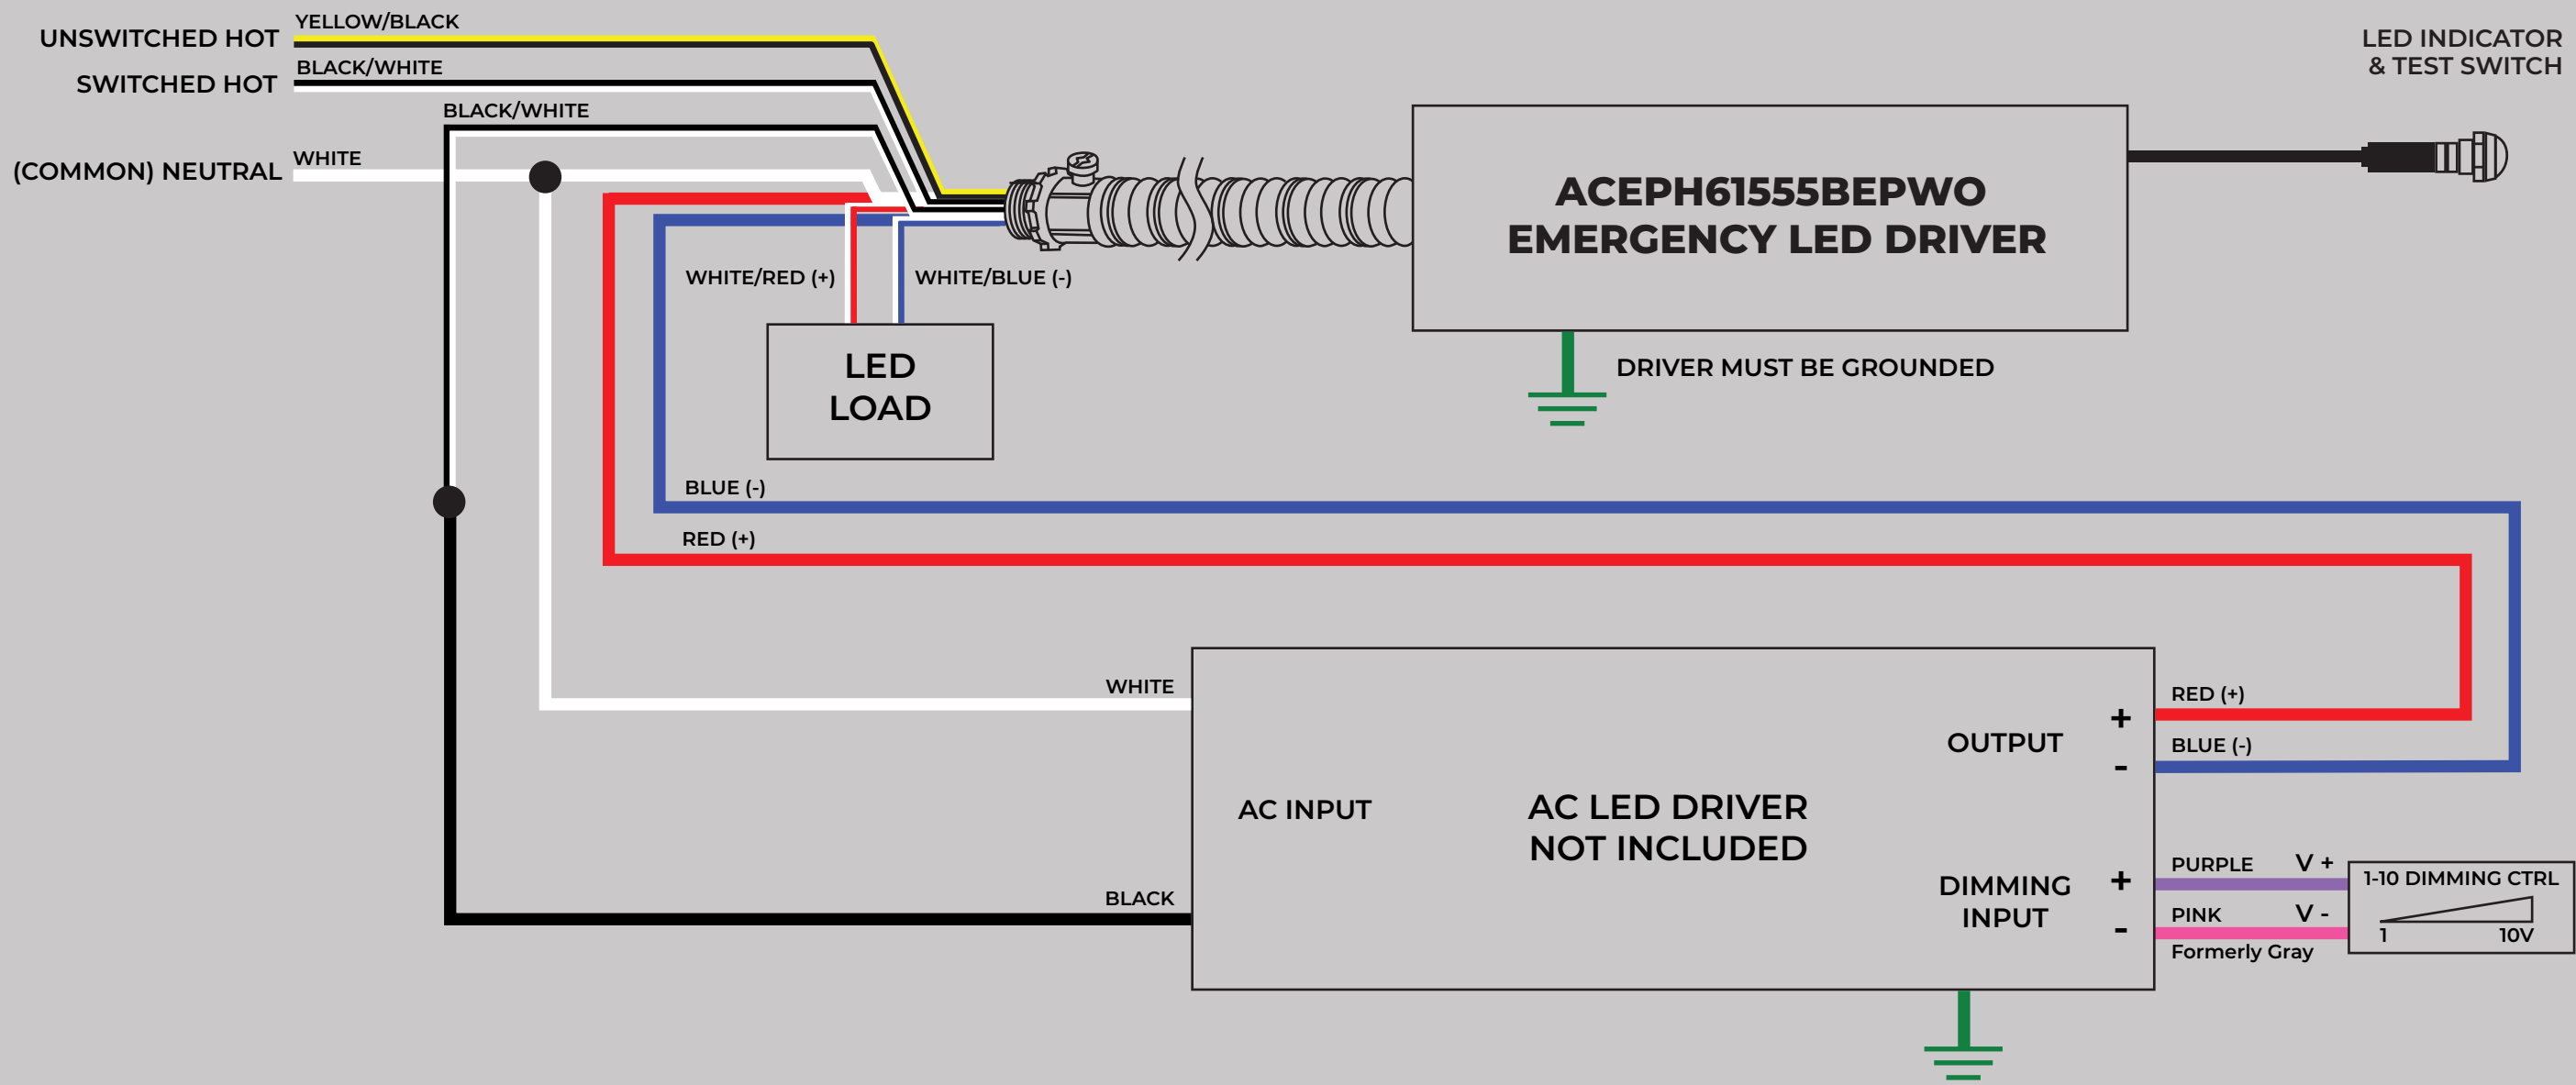

USE COPPER WIRE

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

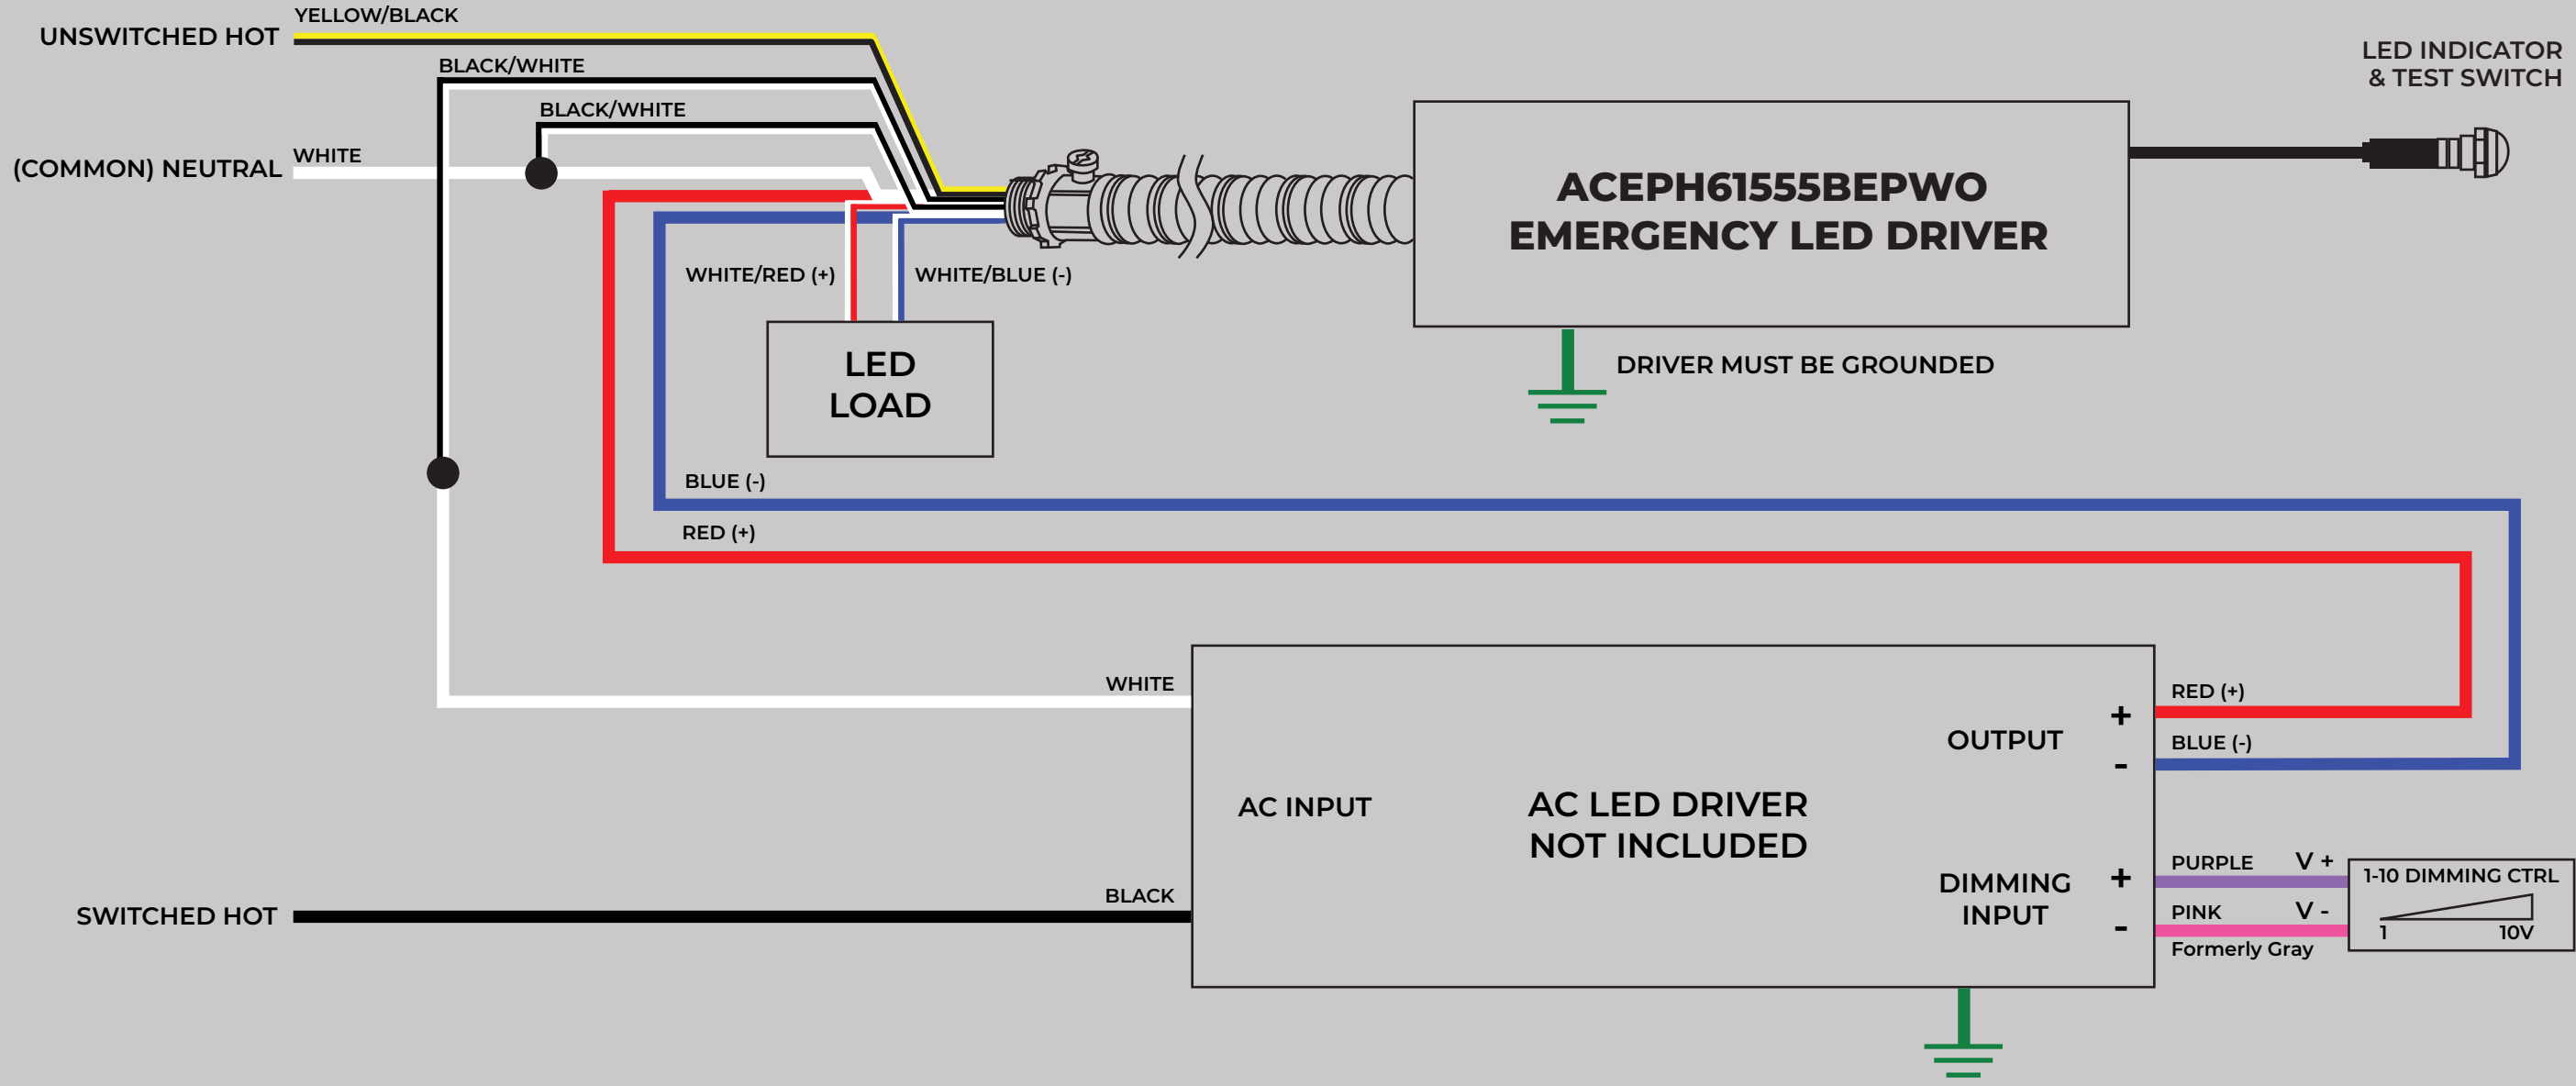

USE COPPER WIRE

DIAGRAMA DE CABLEADO EN ESPAÑOL

ACEPH61555BEPWO
EMERGENCY LED DRIVER

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit, BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets. For metal enclosed wiring system.

USE COPPER WIRE


POWER

800-375-6355

150-0222 Rev. 02
Emergency Lighting Equipment
Approved for listing by UL
Made in Taiwan - AM12340


Input Voltage: 120-277 V, 50/60 Hz
Input Current (max): 170 mA
Input Power: 8 W
Output Voltage: 150V V
Output Current: 100 mA ~ 400 mA
Output Power: 8 W
Battery Voltage: 7.2 V
Battery Charge Current: 185 mA
Battery Charge Time (max): 24 Hours
Operating Duration (min): 90 Minutes
Ambient Temperature: 0 °C ~ 55 °C
Output Class 2 Compliant
Suitable for damp locations
For factory or field installation
For metal enclosed wiring system

A. DIAGRAMA DE CABLEADO TÍPICO PARA CONMUTAR LA ENERGÍA AC CALIENTE CONMUTADA PARA EL CONTROLADOR LED AC NORMAL

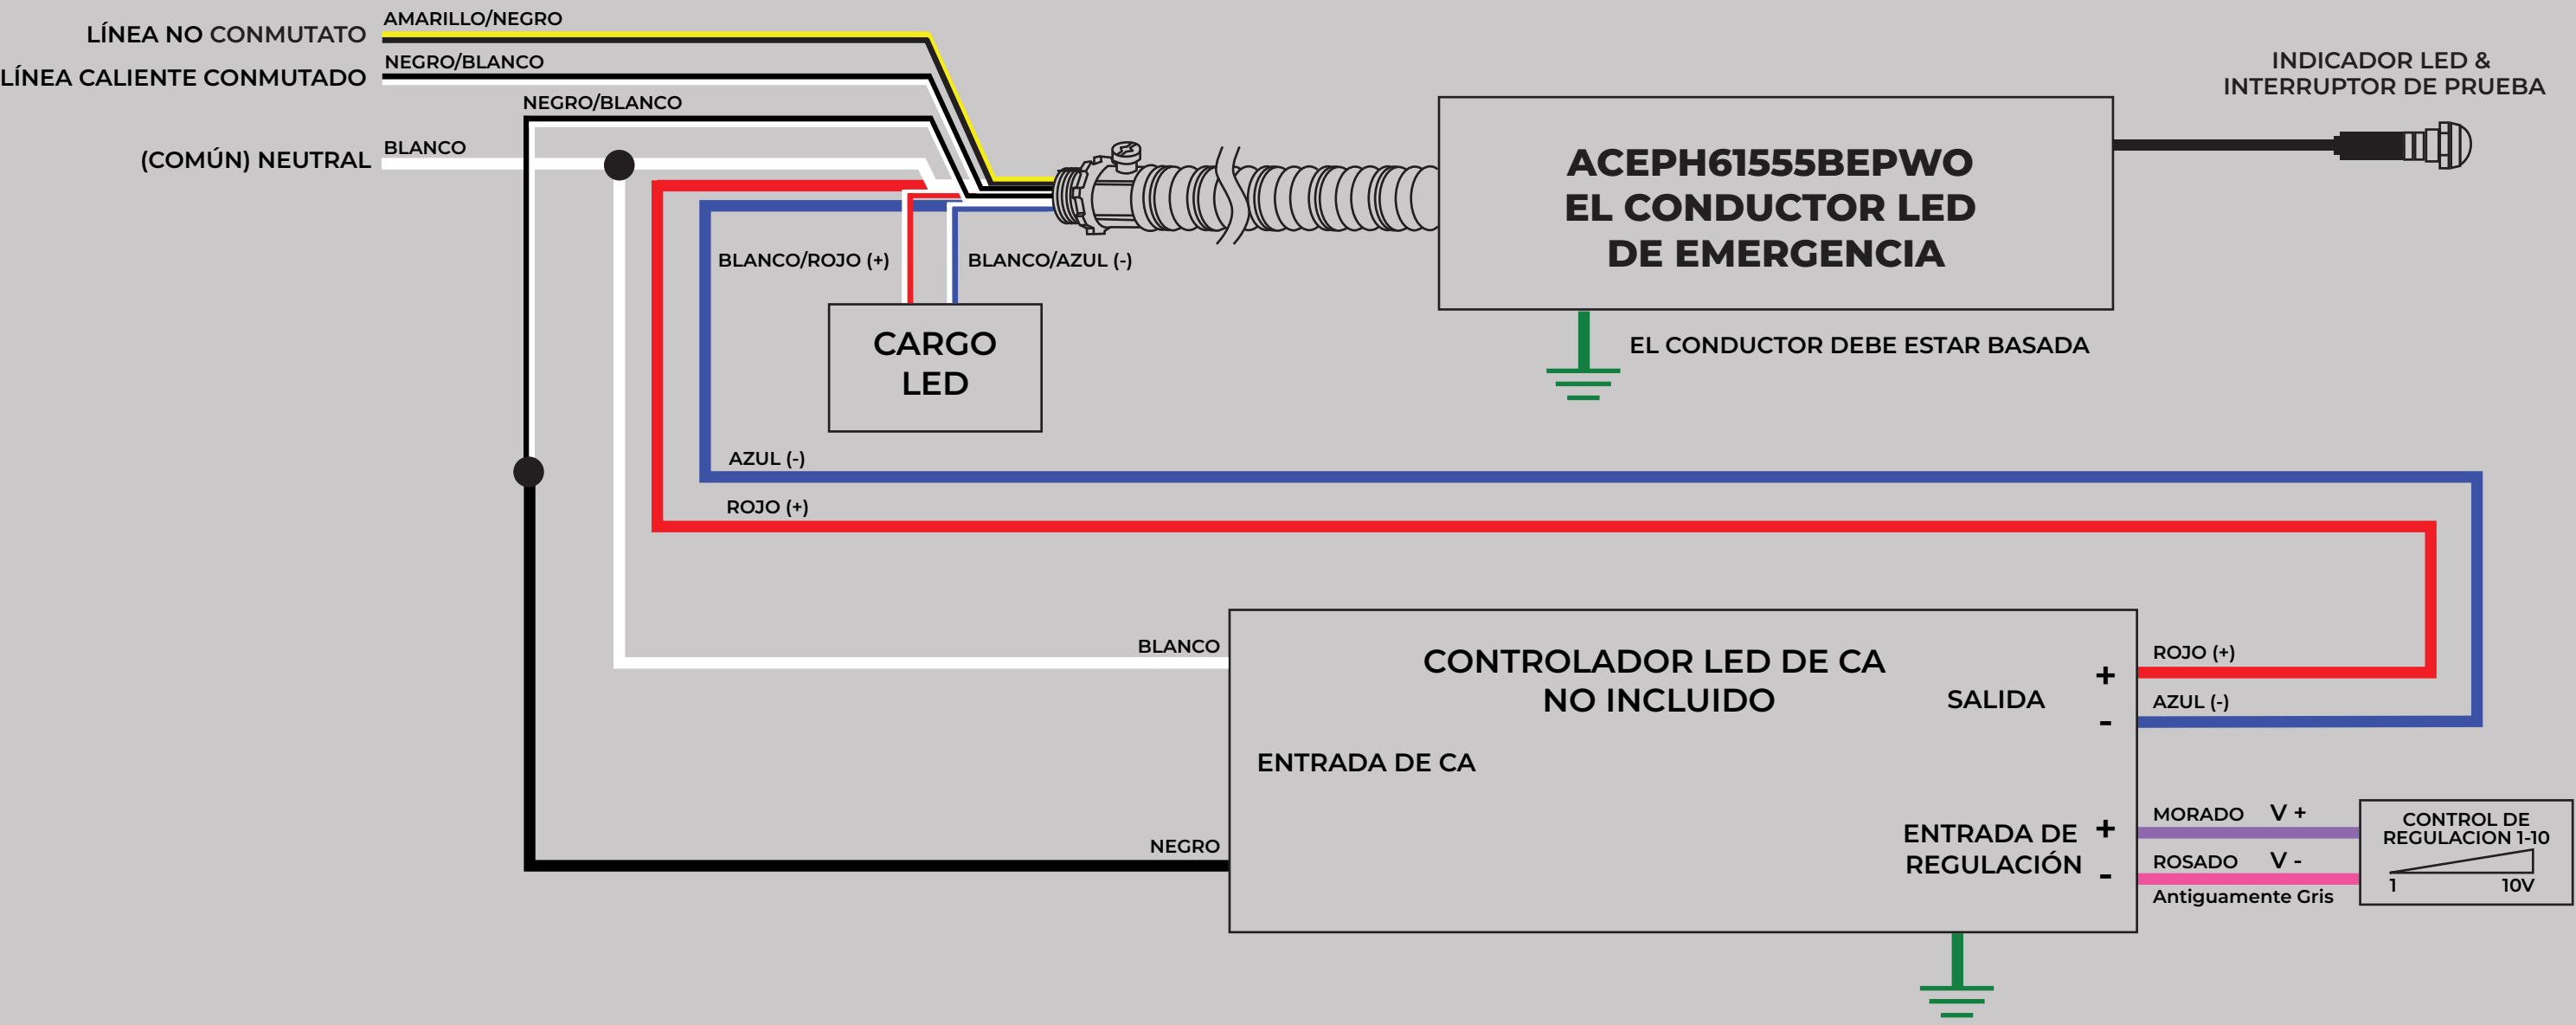

USAR CABLE DE COBRE

B. DIAGRAMA DE CABLEADO TÍPICO PARA CONMUTAR EL CABLE NEUTRO DEL CONDUCTOR LED CA NORMAL

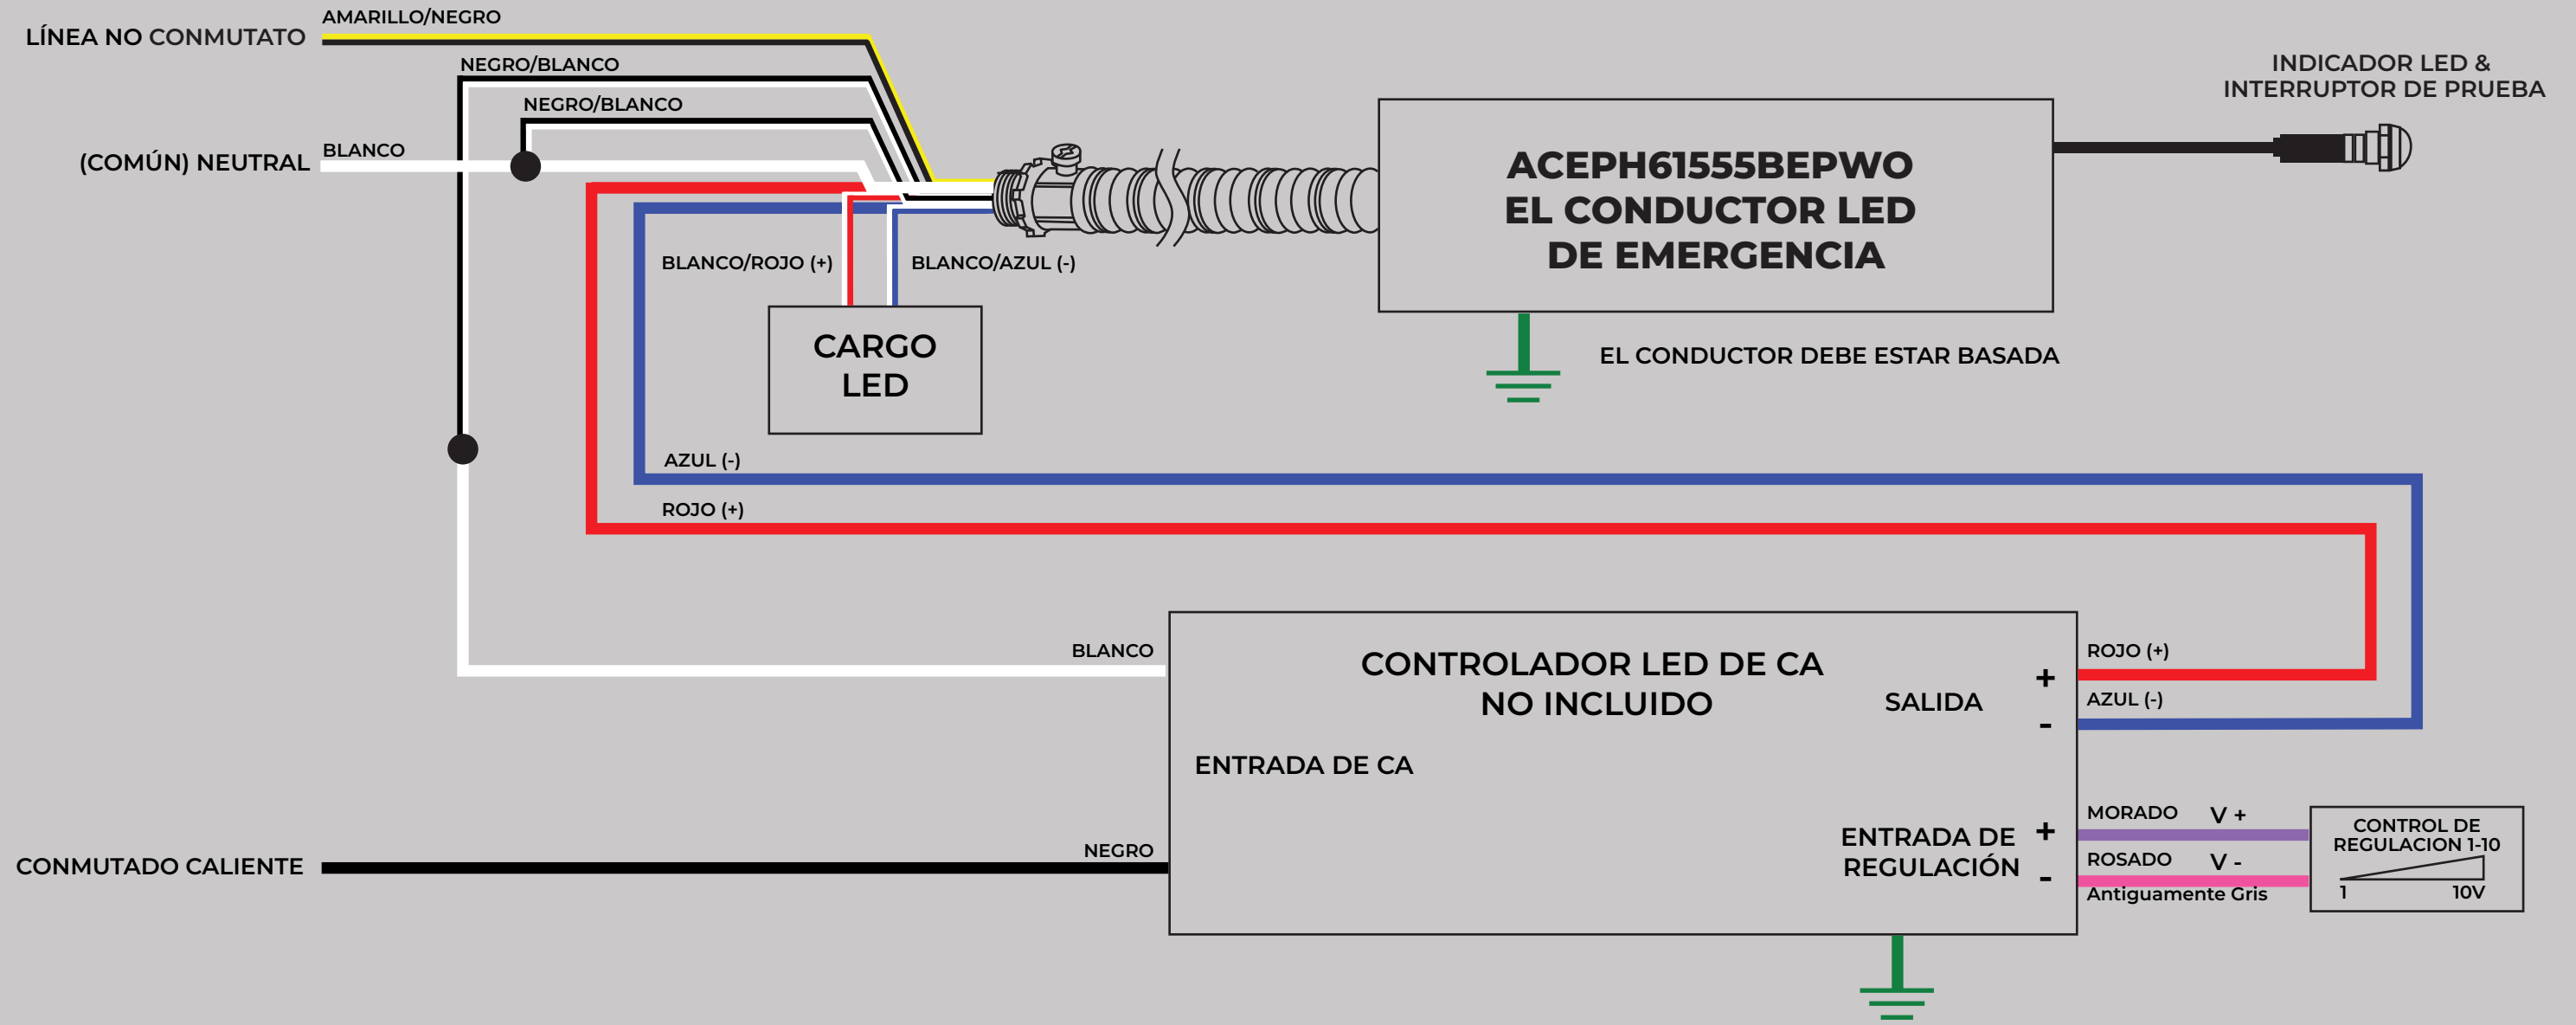

USAR CABLE DE COBRE