

INPUT RATINGS:
• Input Voltage: 120-277 V, 50/60 Hz
• Input Current (max): 120 mA
• Input Power (max): 14 W
• Power Factor: >0.9

OUTPUT RATINGS:
• Output Voltage: 120/277 Vac
• Output Power (Unity PF): 10 Watts
• Load Power Factor Range: 0.65 leading to 0.65 lagging
• Minimum Battery Charge Time: 24 hours
• Rated Operating Time: 90 minutes

Ambient operating temperature: 0 to 50 °C

USE COPPER WIRE




CSA C22.2 No. 141,
Emergency Lighting Equipment
Appareil d'éclairage de secours

UL
LISTED
EMERGENCY LIGHT &
POWER EQ.
5102
E501729

FC
TAA
COMPLIANT

ACE LEDS
800-375-6355
Made in Taiwan • AM219

WIRING DIAGRAM FOR OPERATING ONE SINGLE FIXTURE

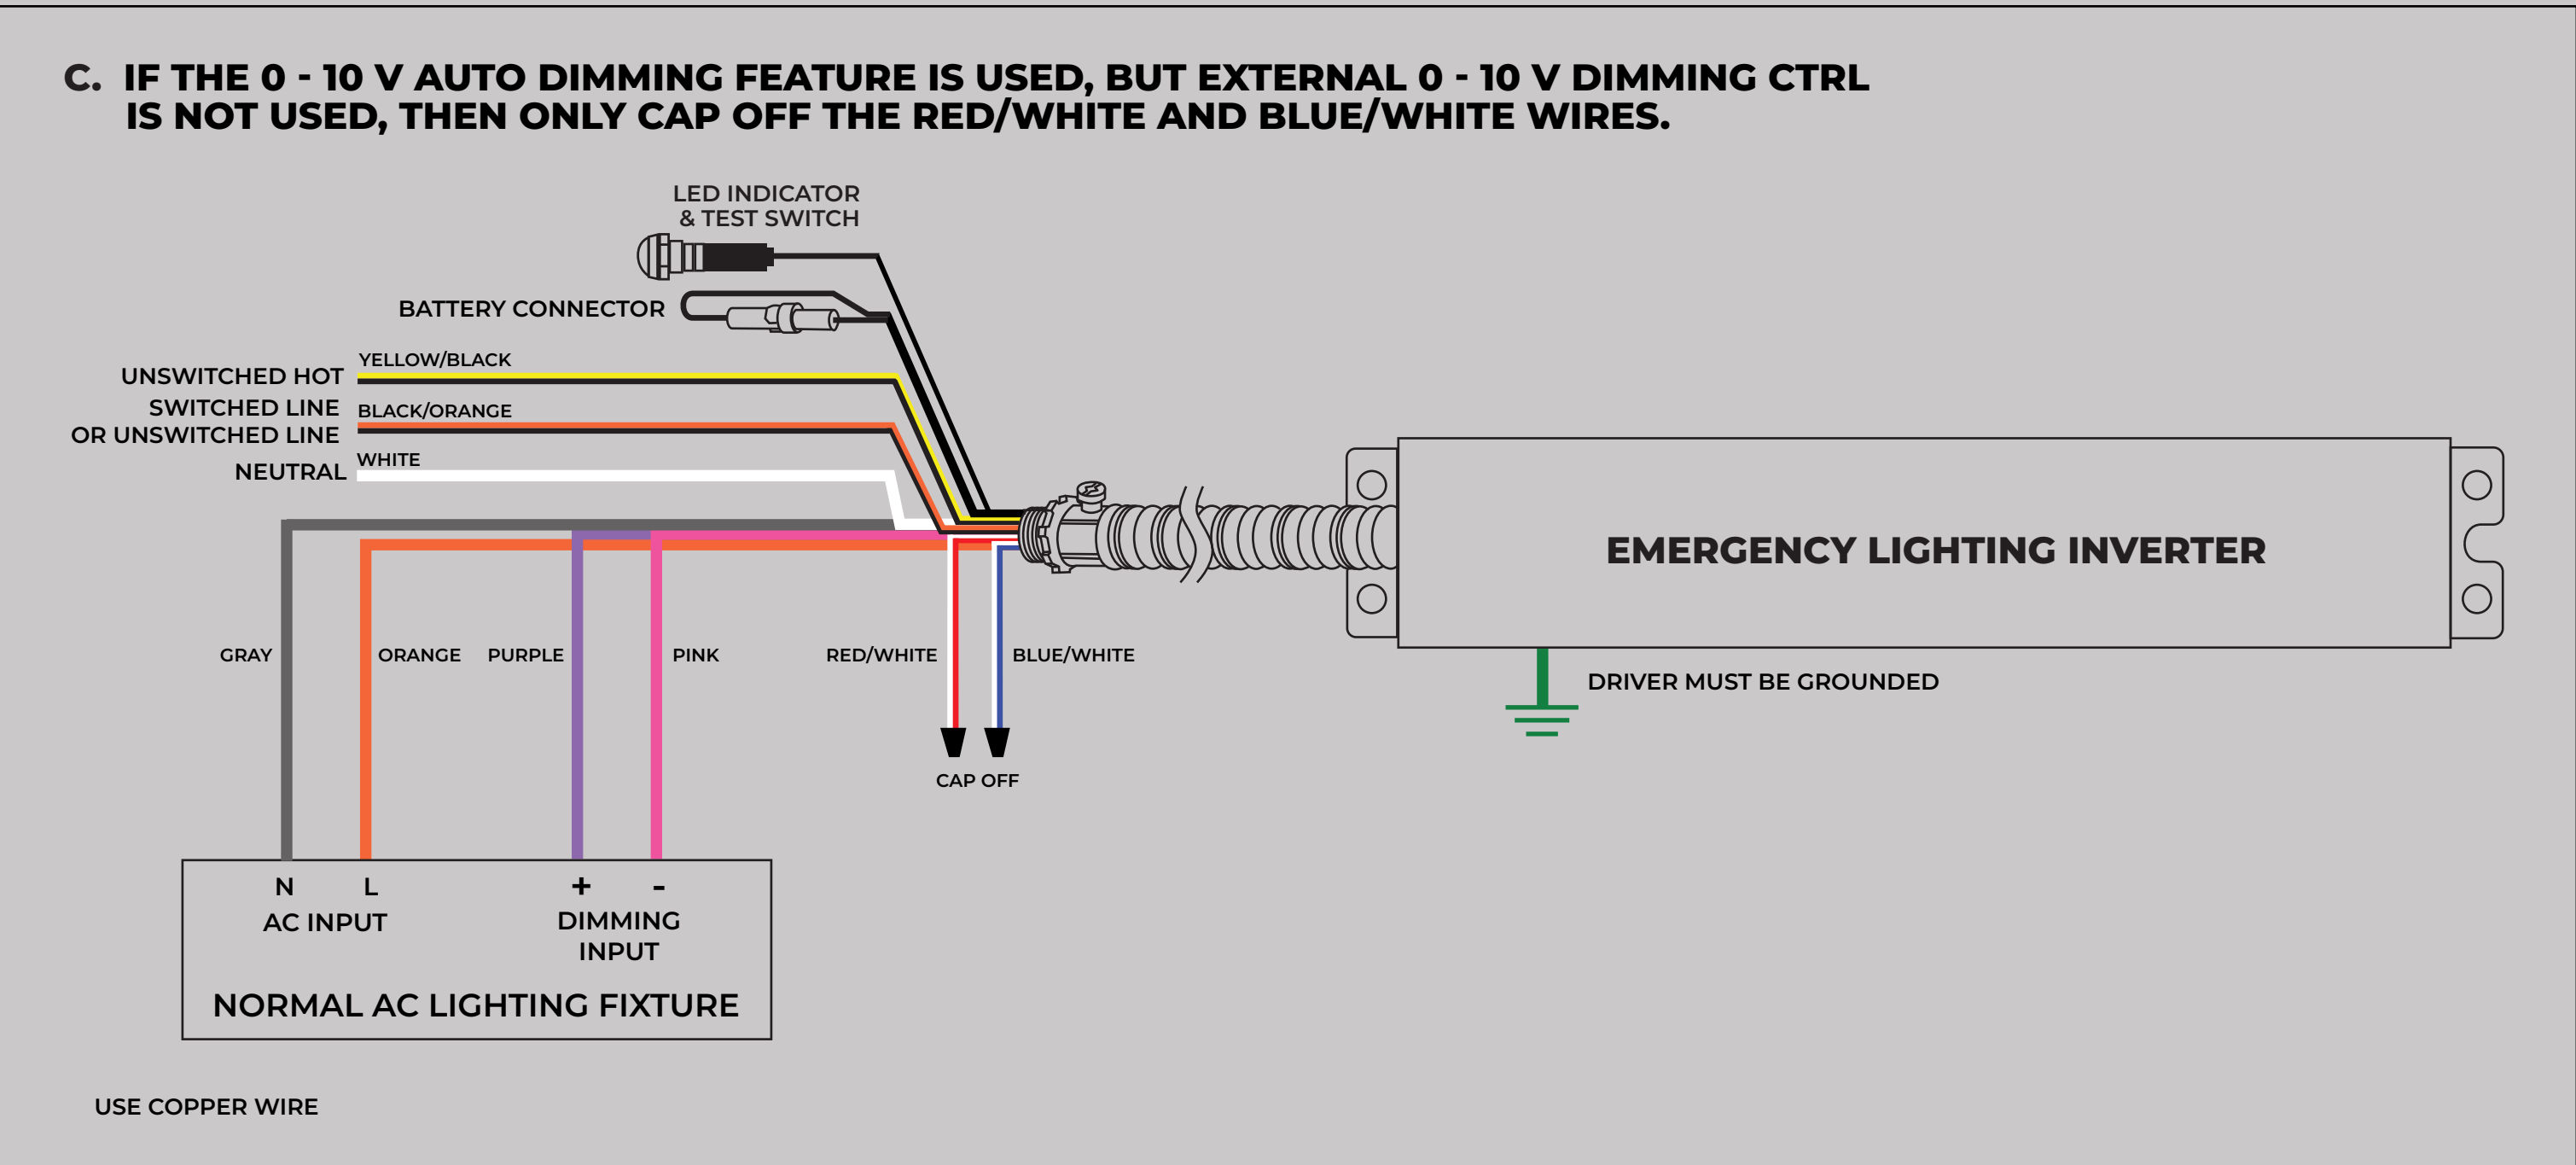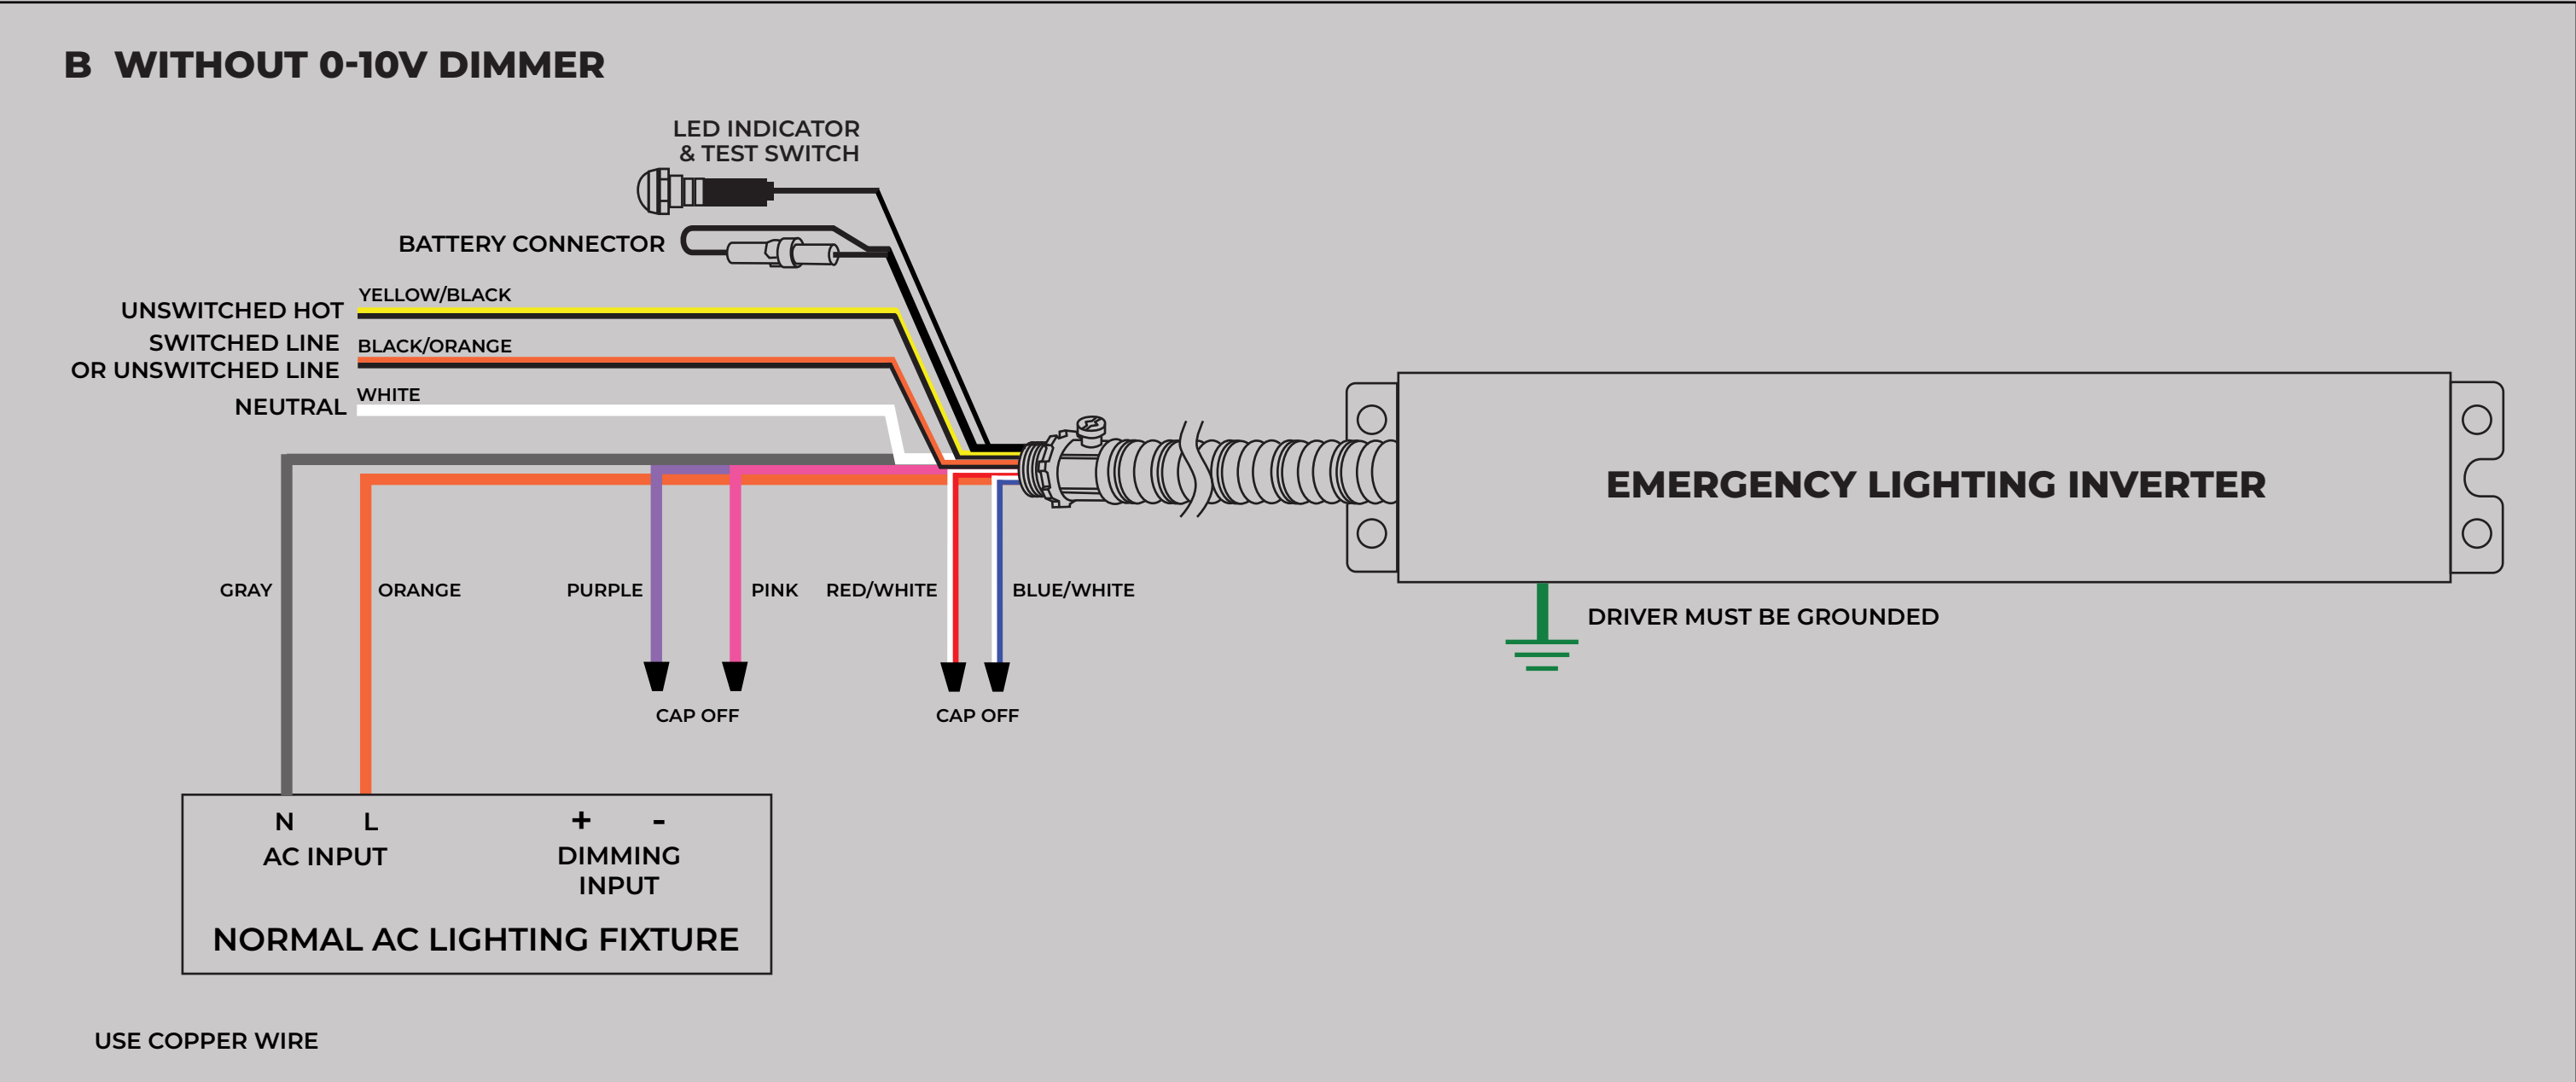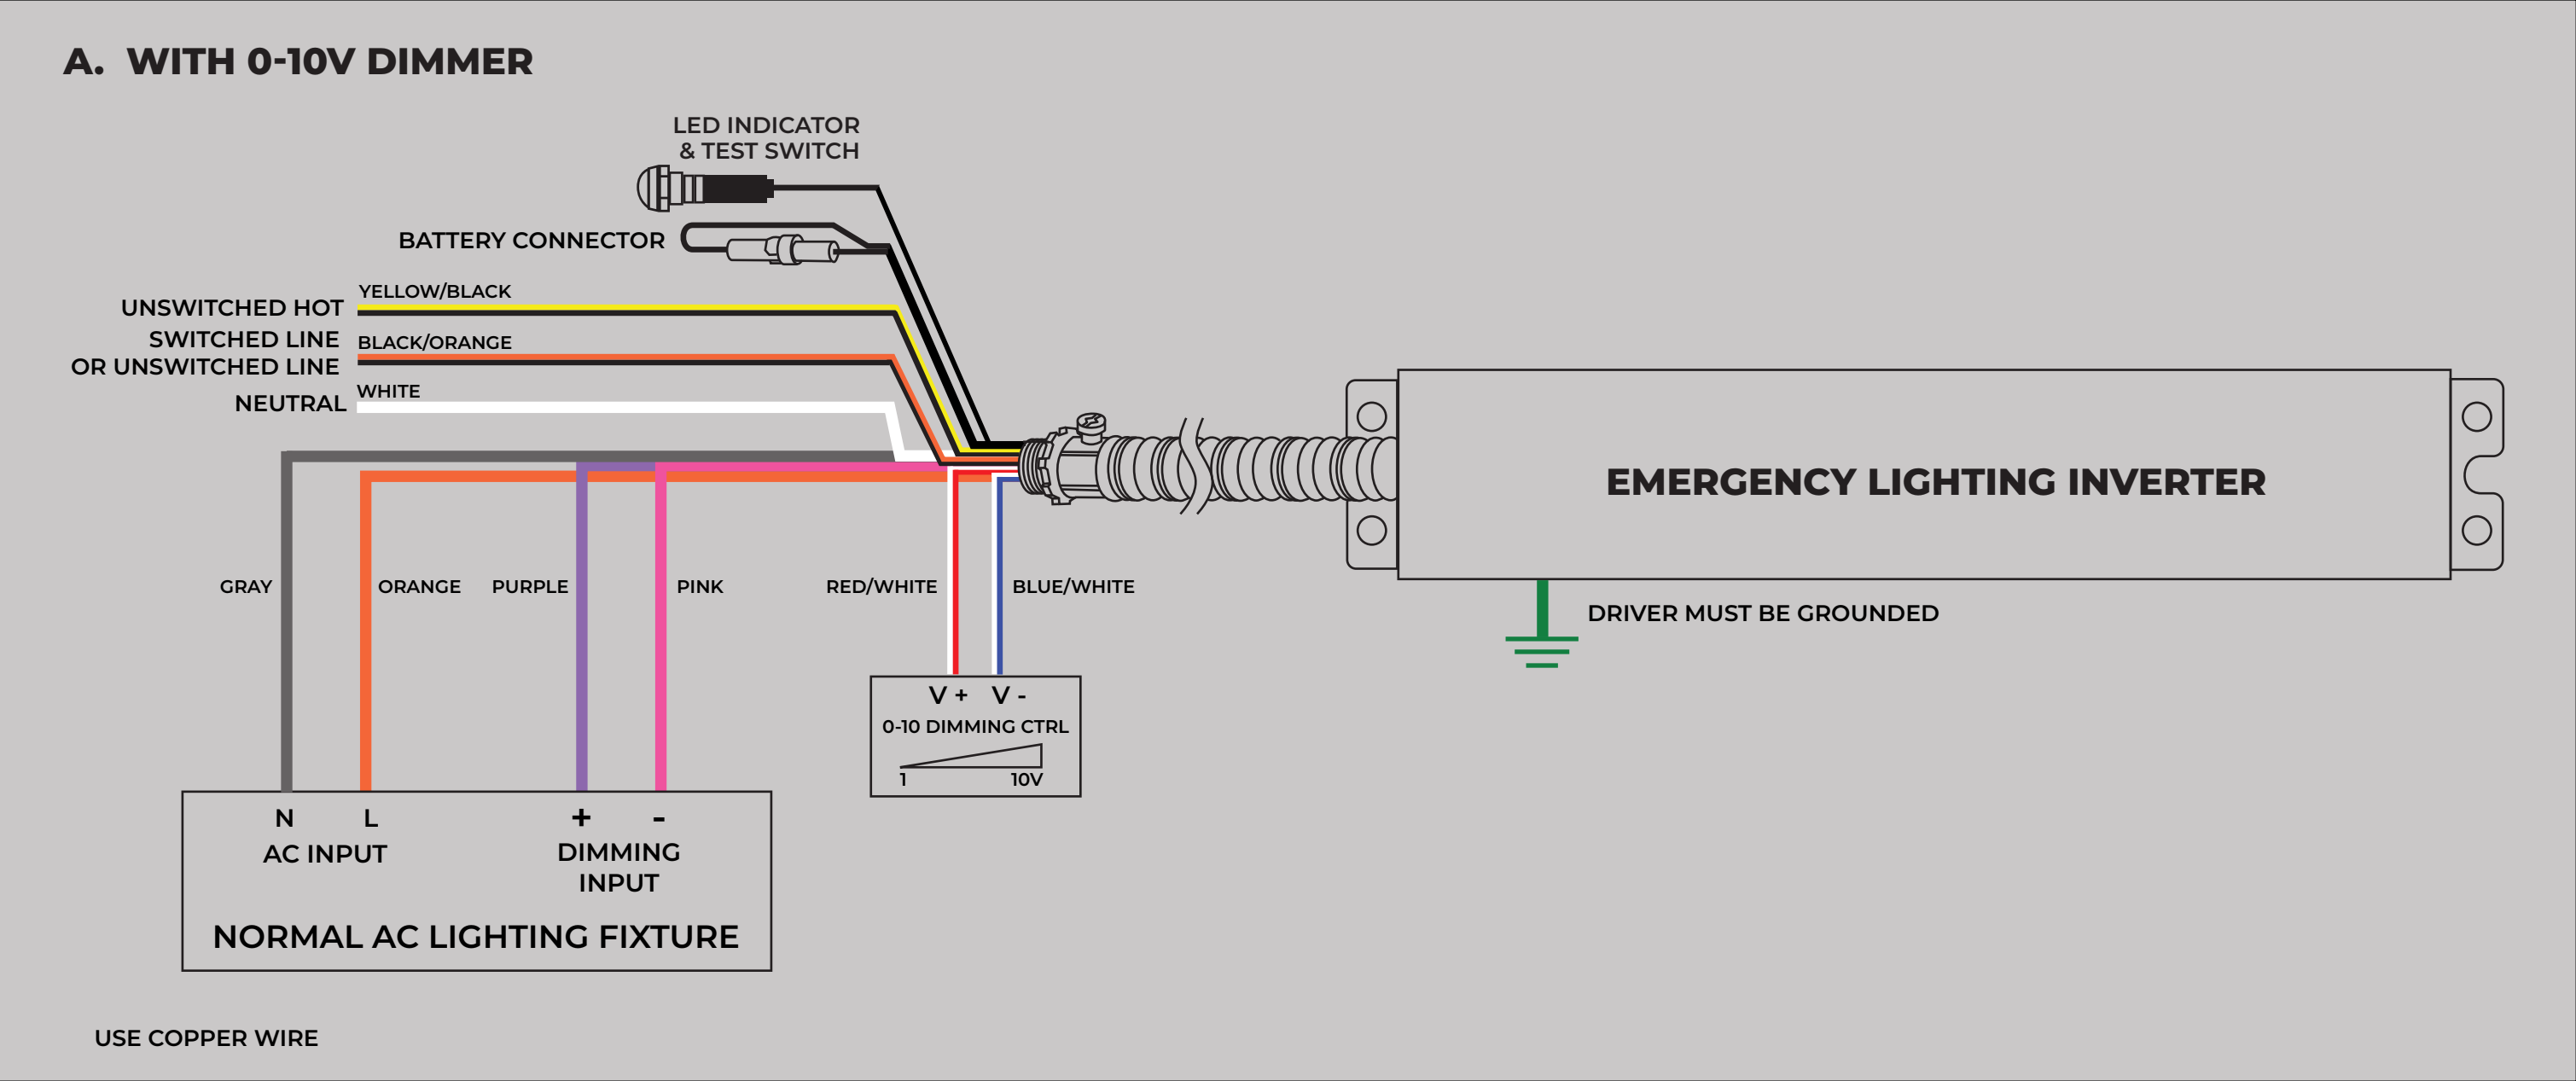

WIRING DIAGRAM FOR OPERATING MULTIPLE FIXTURES

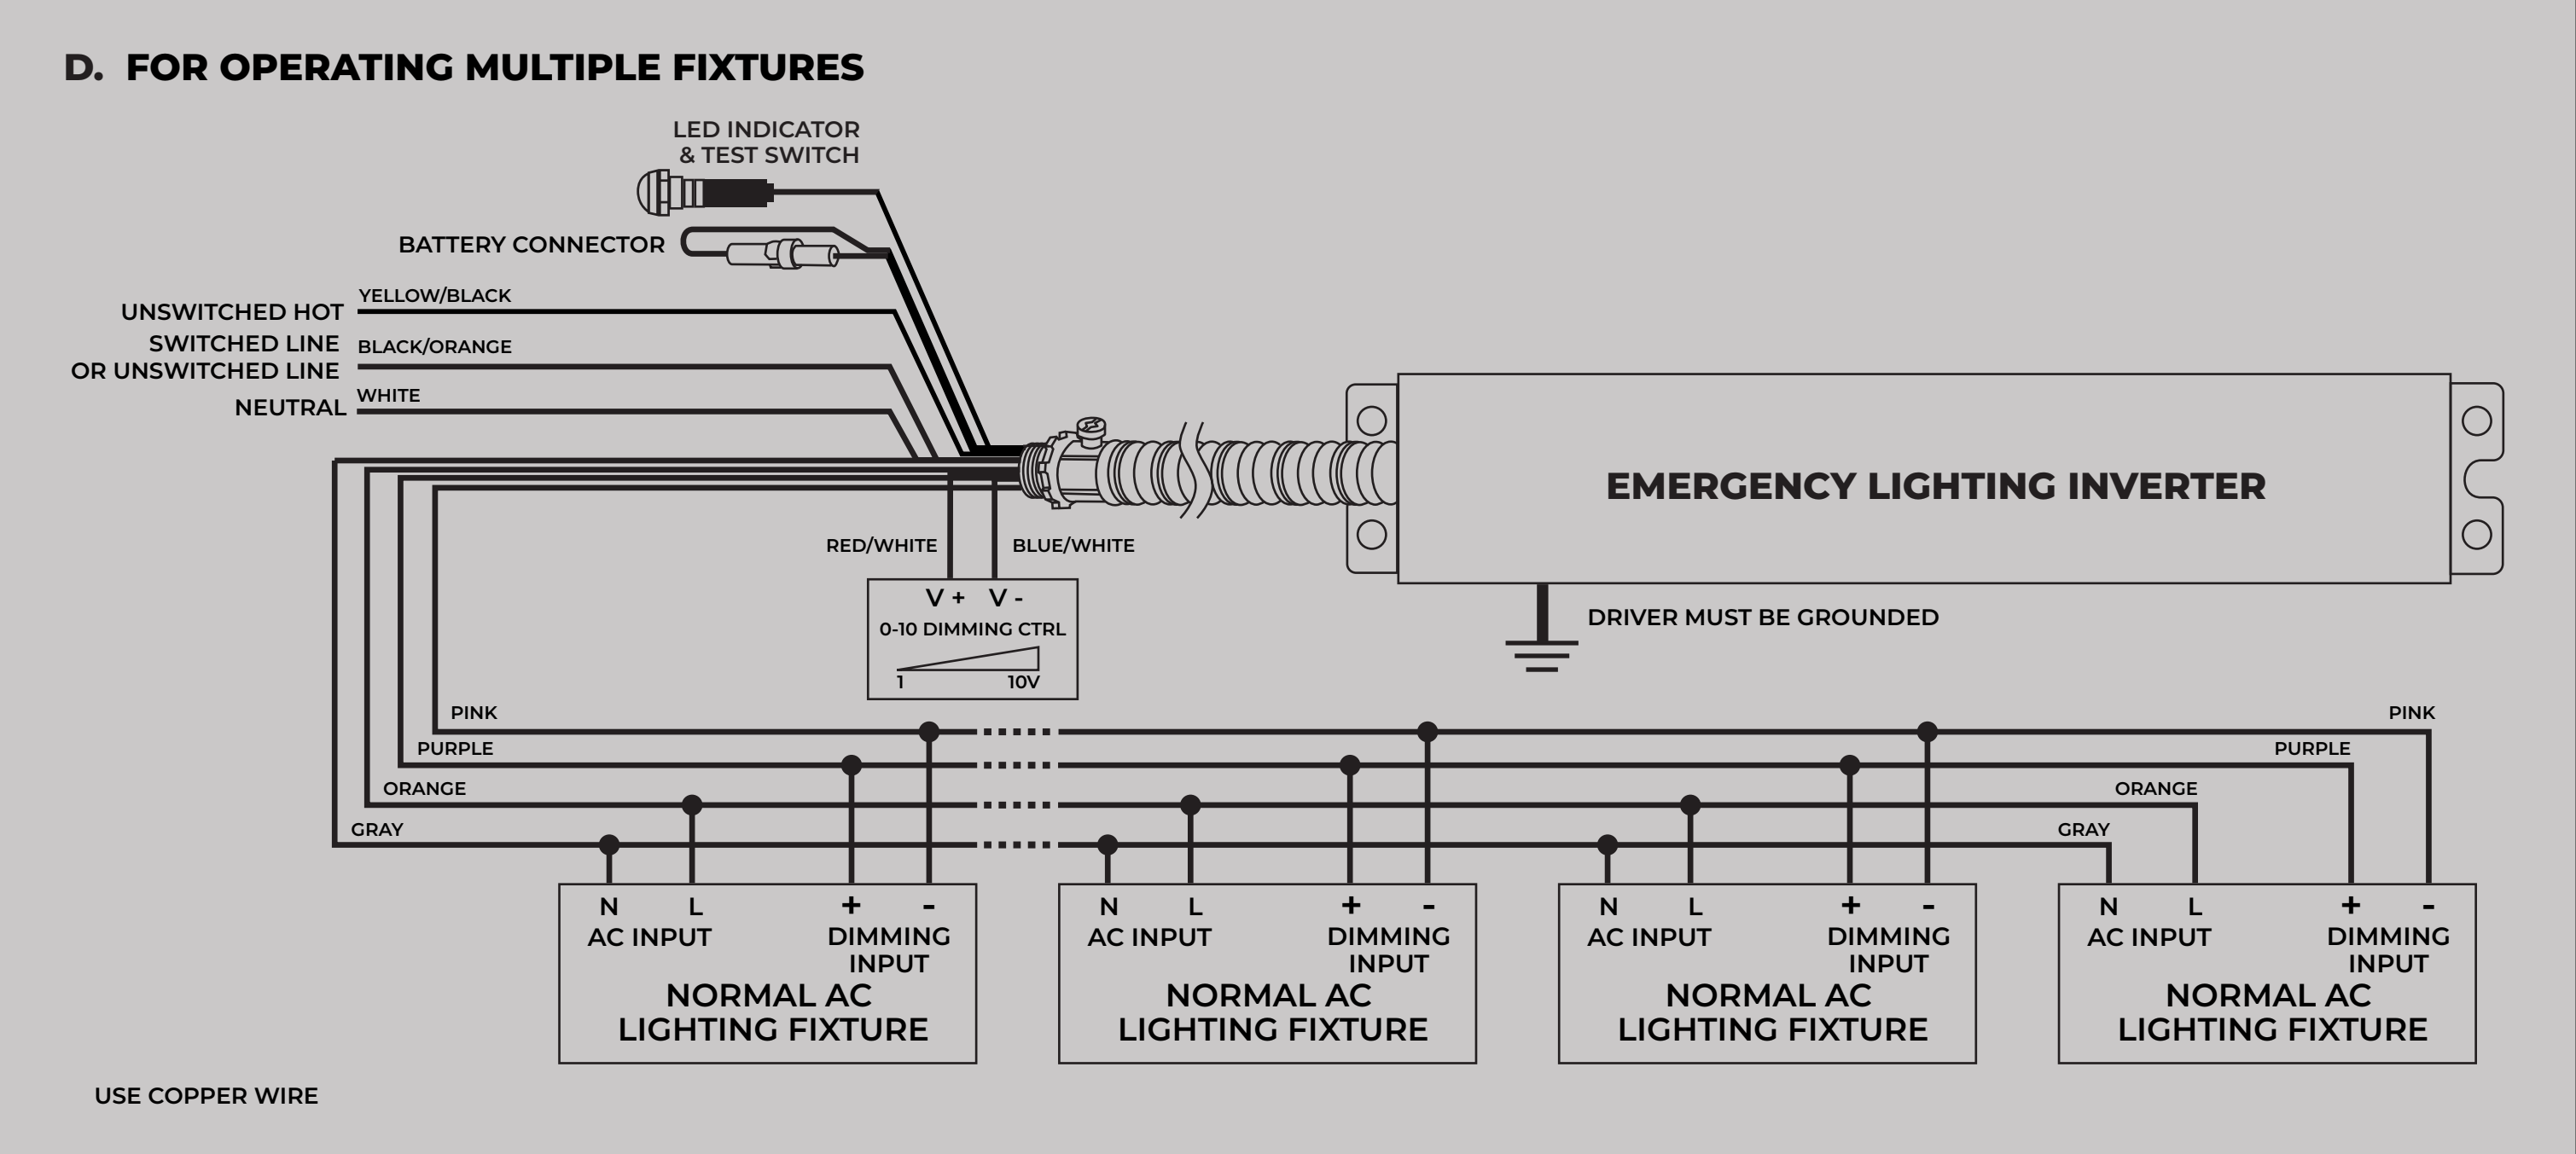


DIAGRAMA DE CABLEADO PARA OPERAR UNA SOLA ACCESORIO DE ILLUMINACION



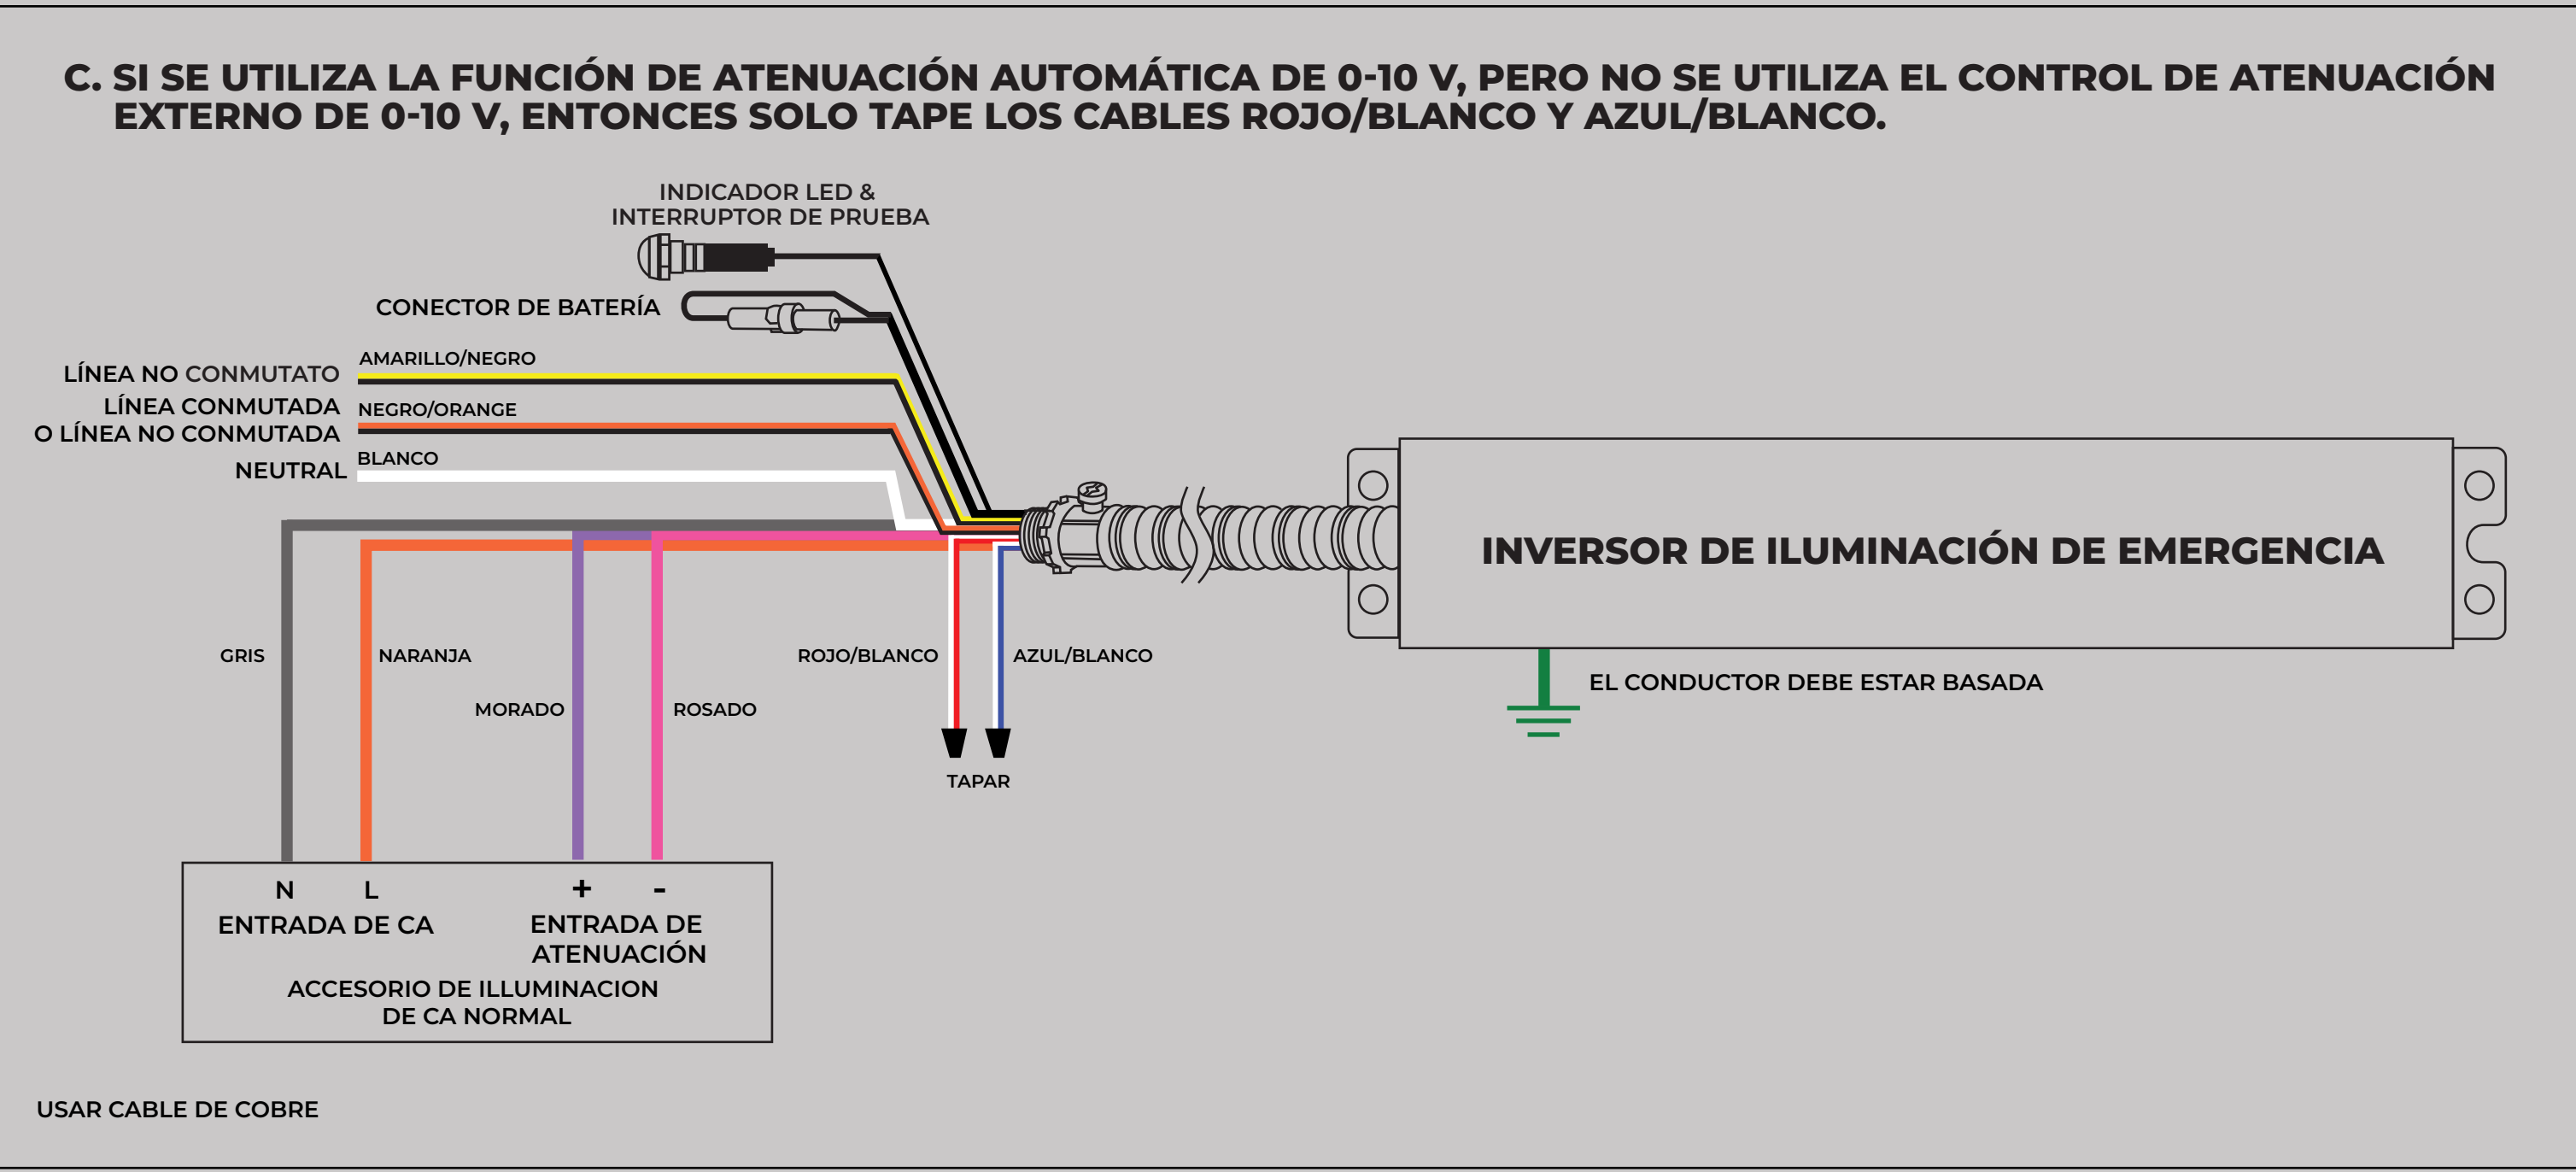


DIAGRAMA DE CABLEADO PARA OPERAR MÚLTIPLES ACCESORIOS

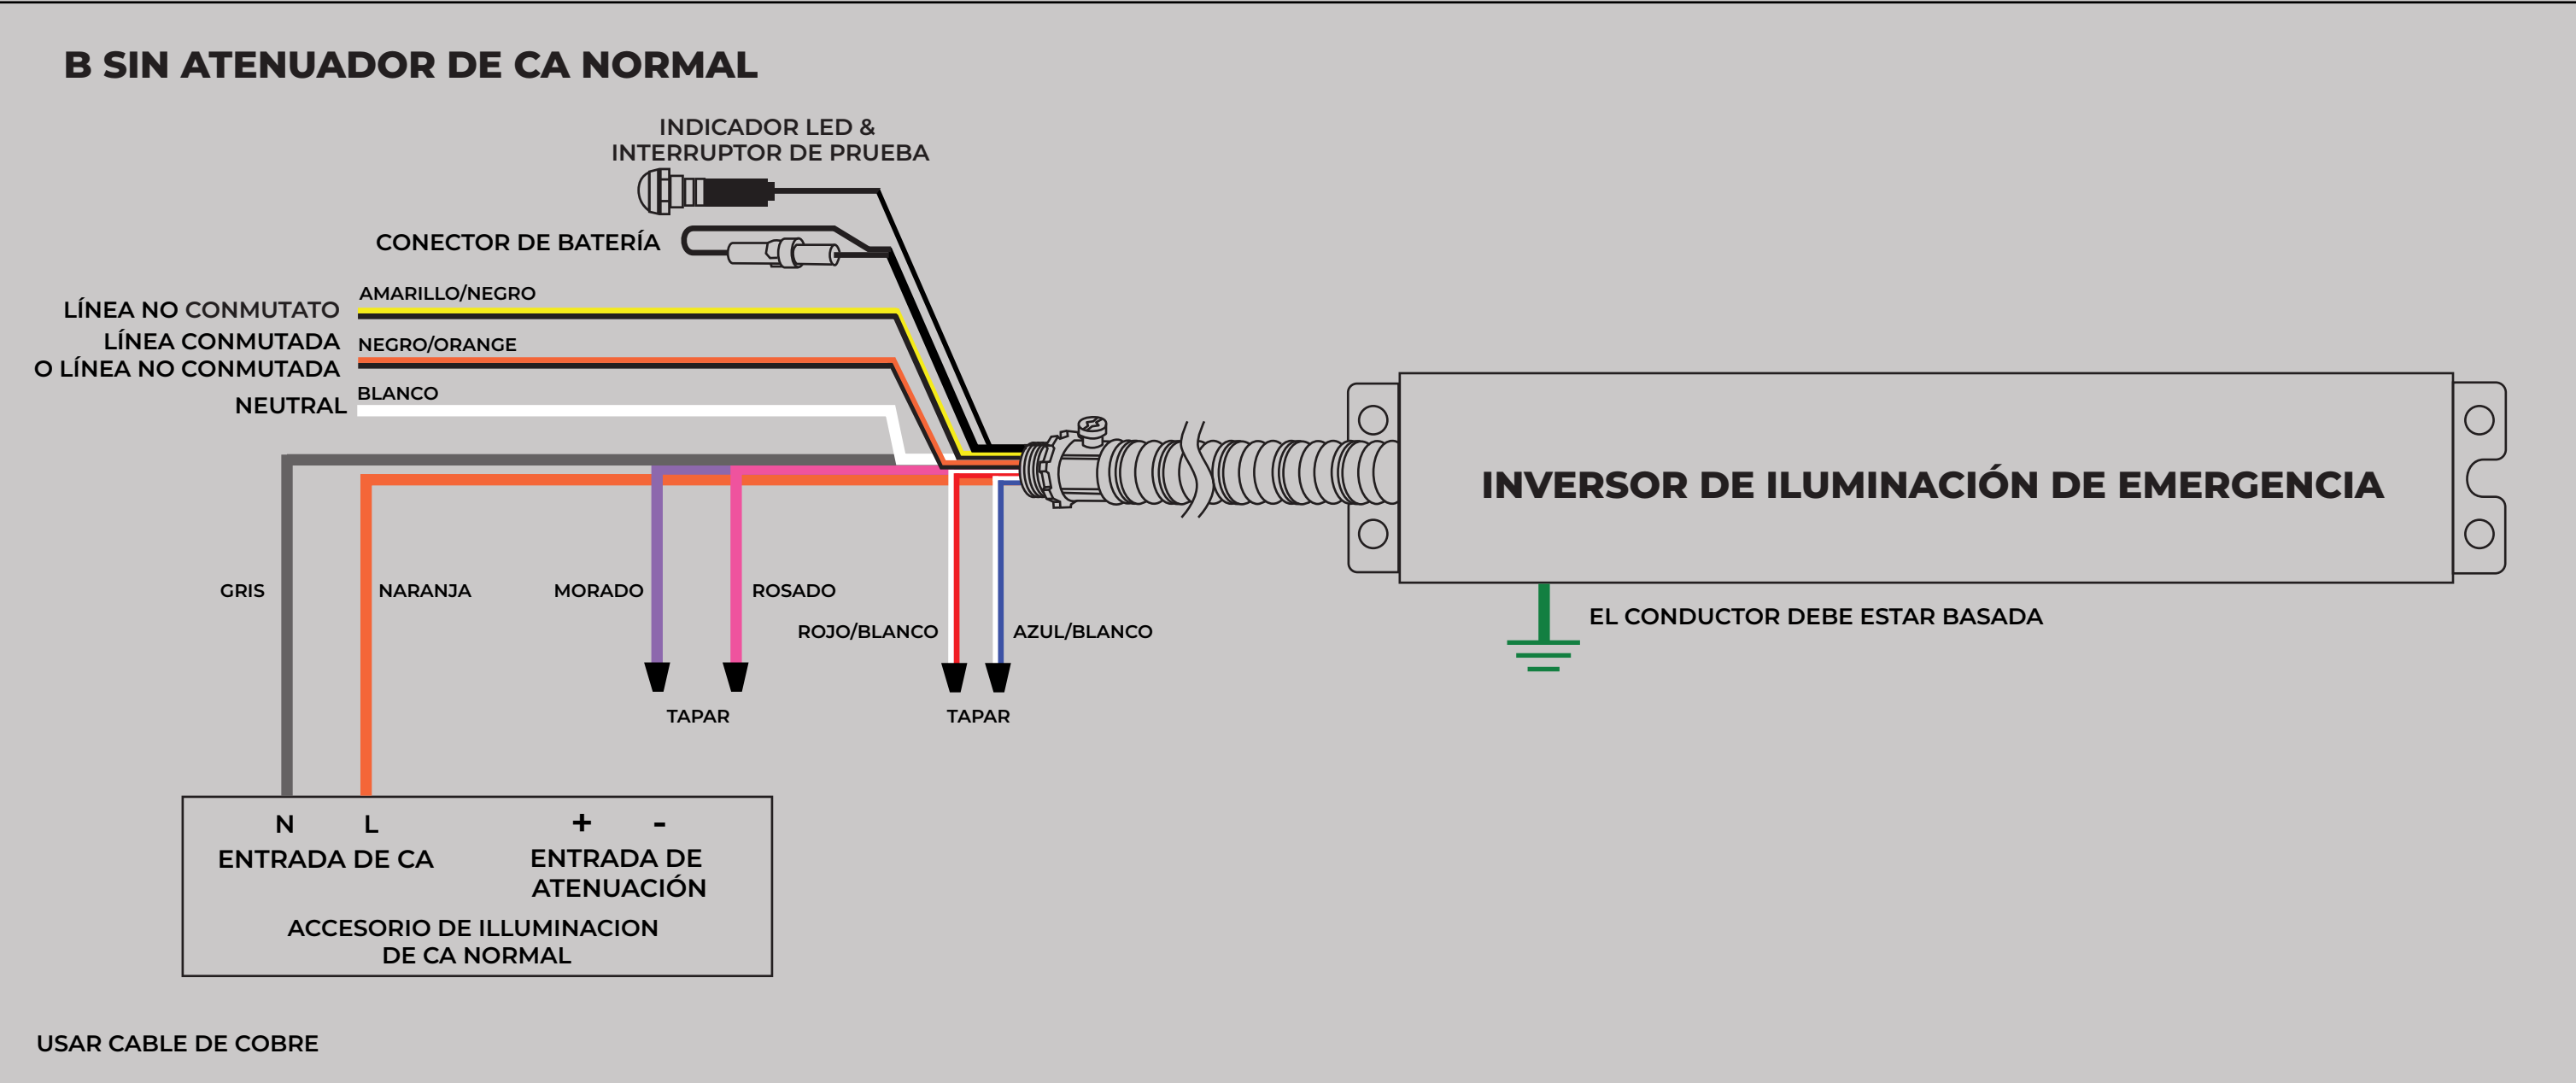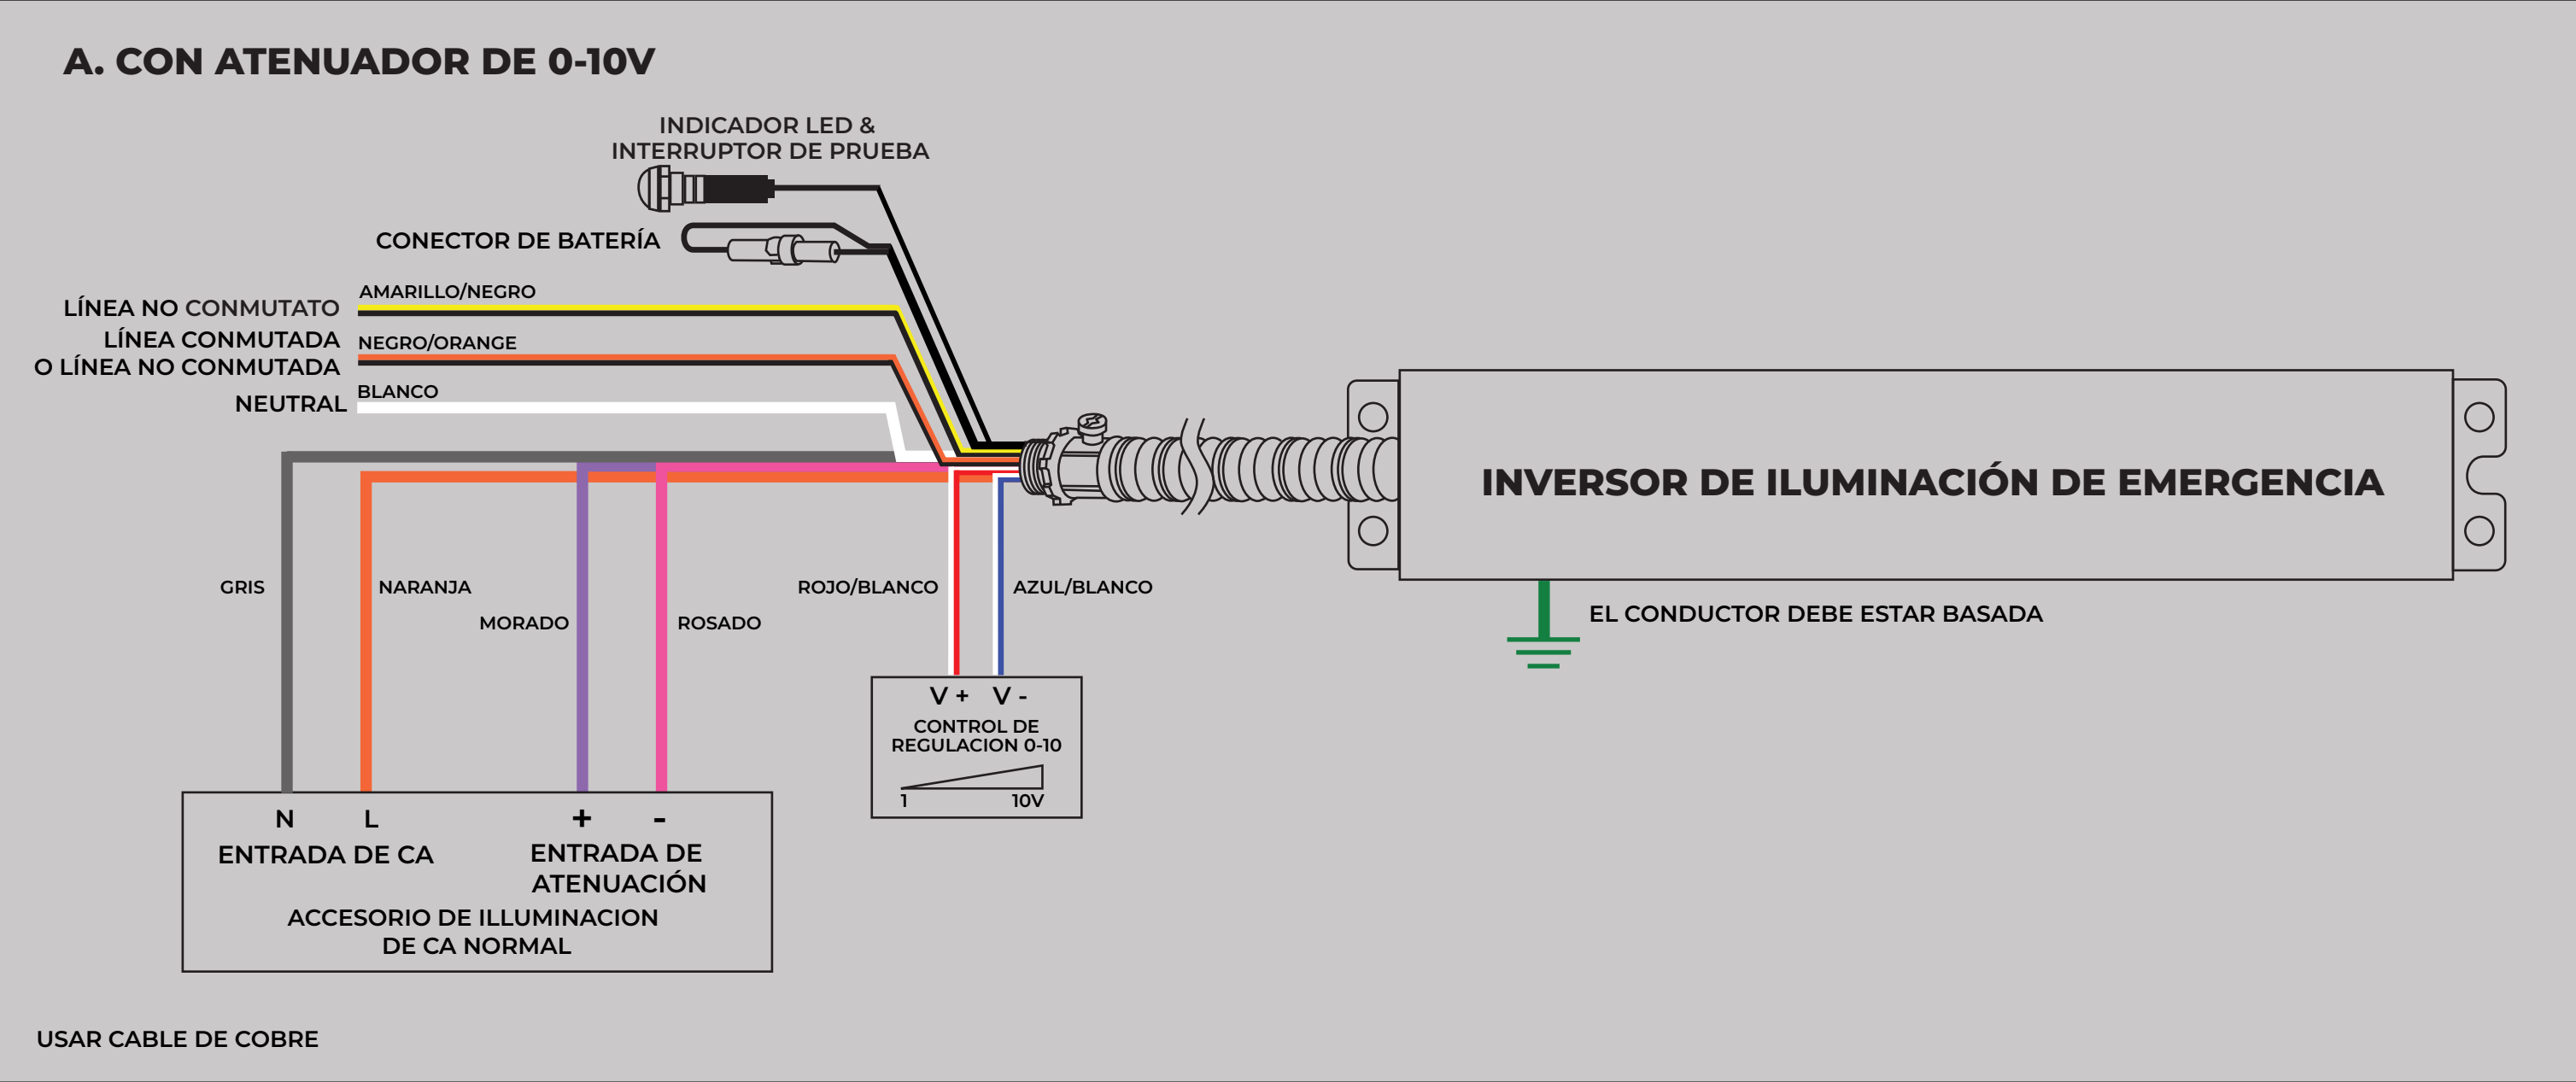