

AC30CD1.25APPD



AC30CD1.25APPD LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (mA): 300 mA @ 120 V / 130 mA @ 277 V
- Output Current: 350 to 1250 mA
- Output Voltage: 15-55 V
- Output Power Max: 30 W
- Open/Short Circuit Protection
- Class P Rated Type HL
- TC < 90°C
- 1-10 V Dimming
- Damp Locations
- Class 2
- Min. Start Temp: 0°C
- For connections use wire rated for at least 90°C (194°F)


PROGRAMMABLE



800-375-6355


Made in Taiwan - AM193
NFC

ENGLISH WIRING DIAGRAM

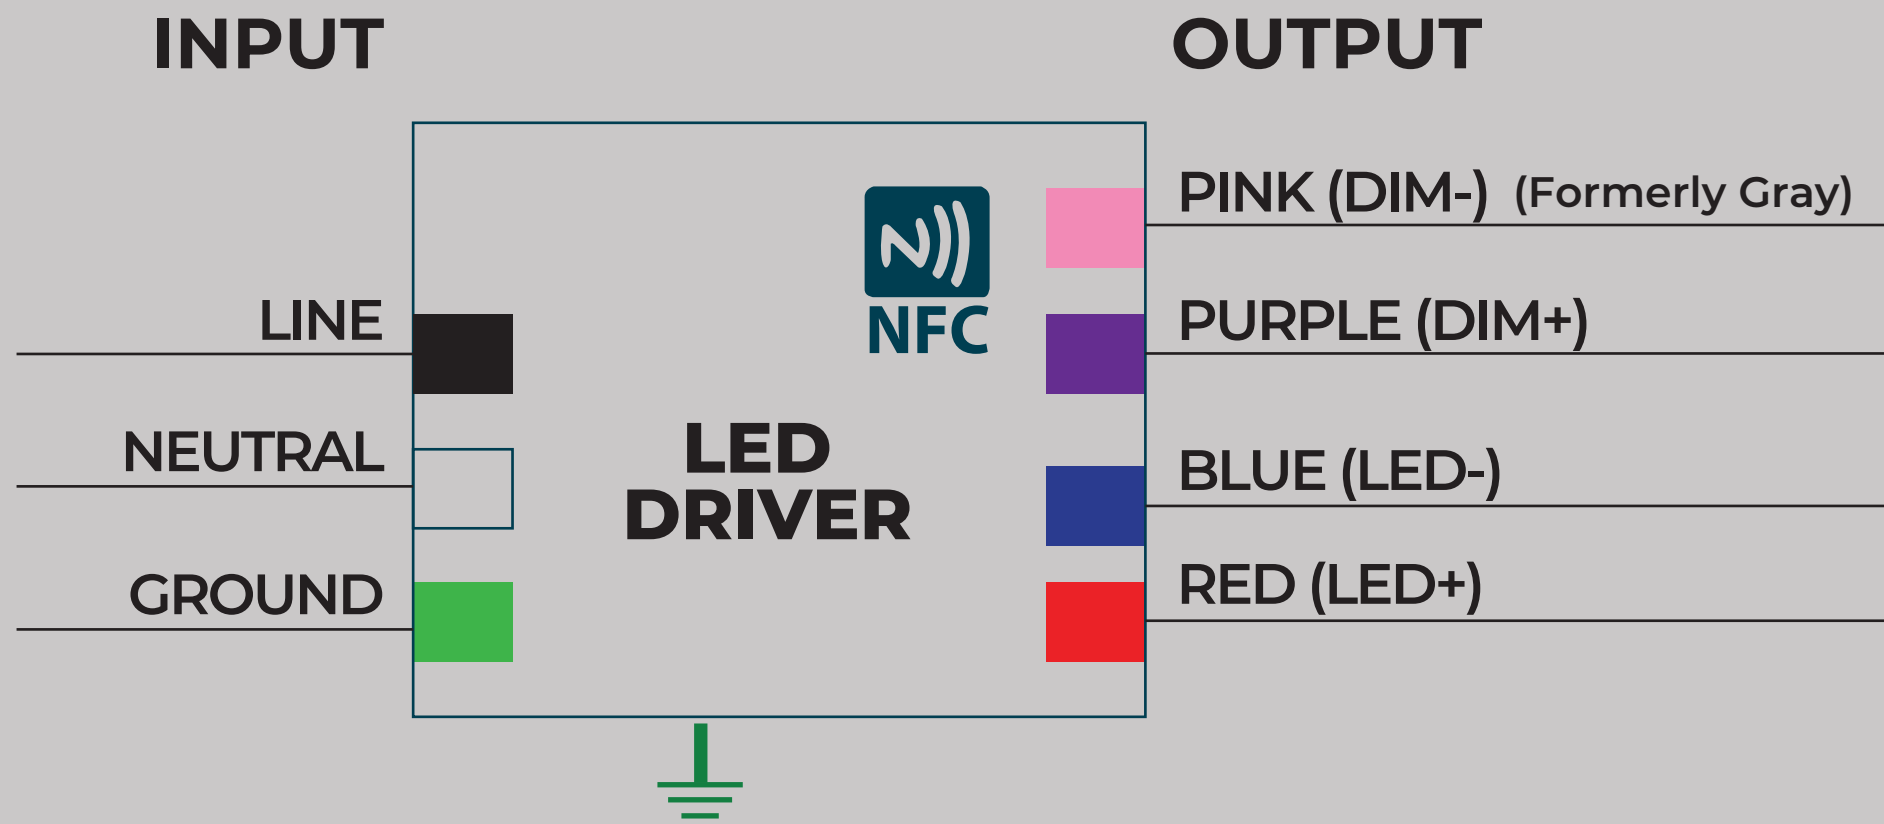

USE COPPER WIRE

DIAGRAMA DE CABLEADO ESPAÑOL

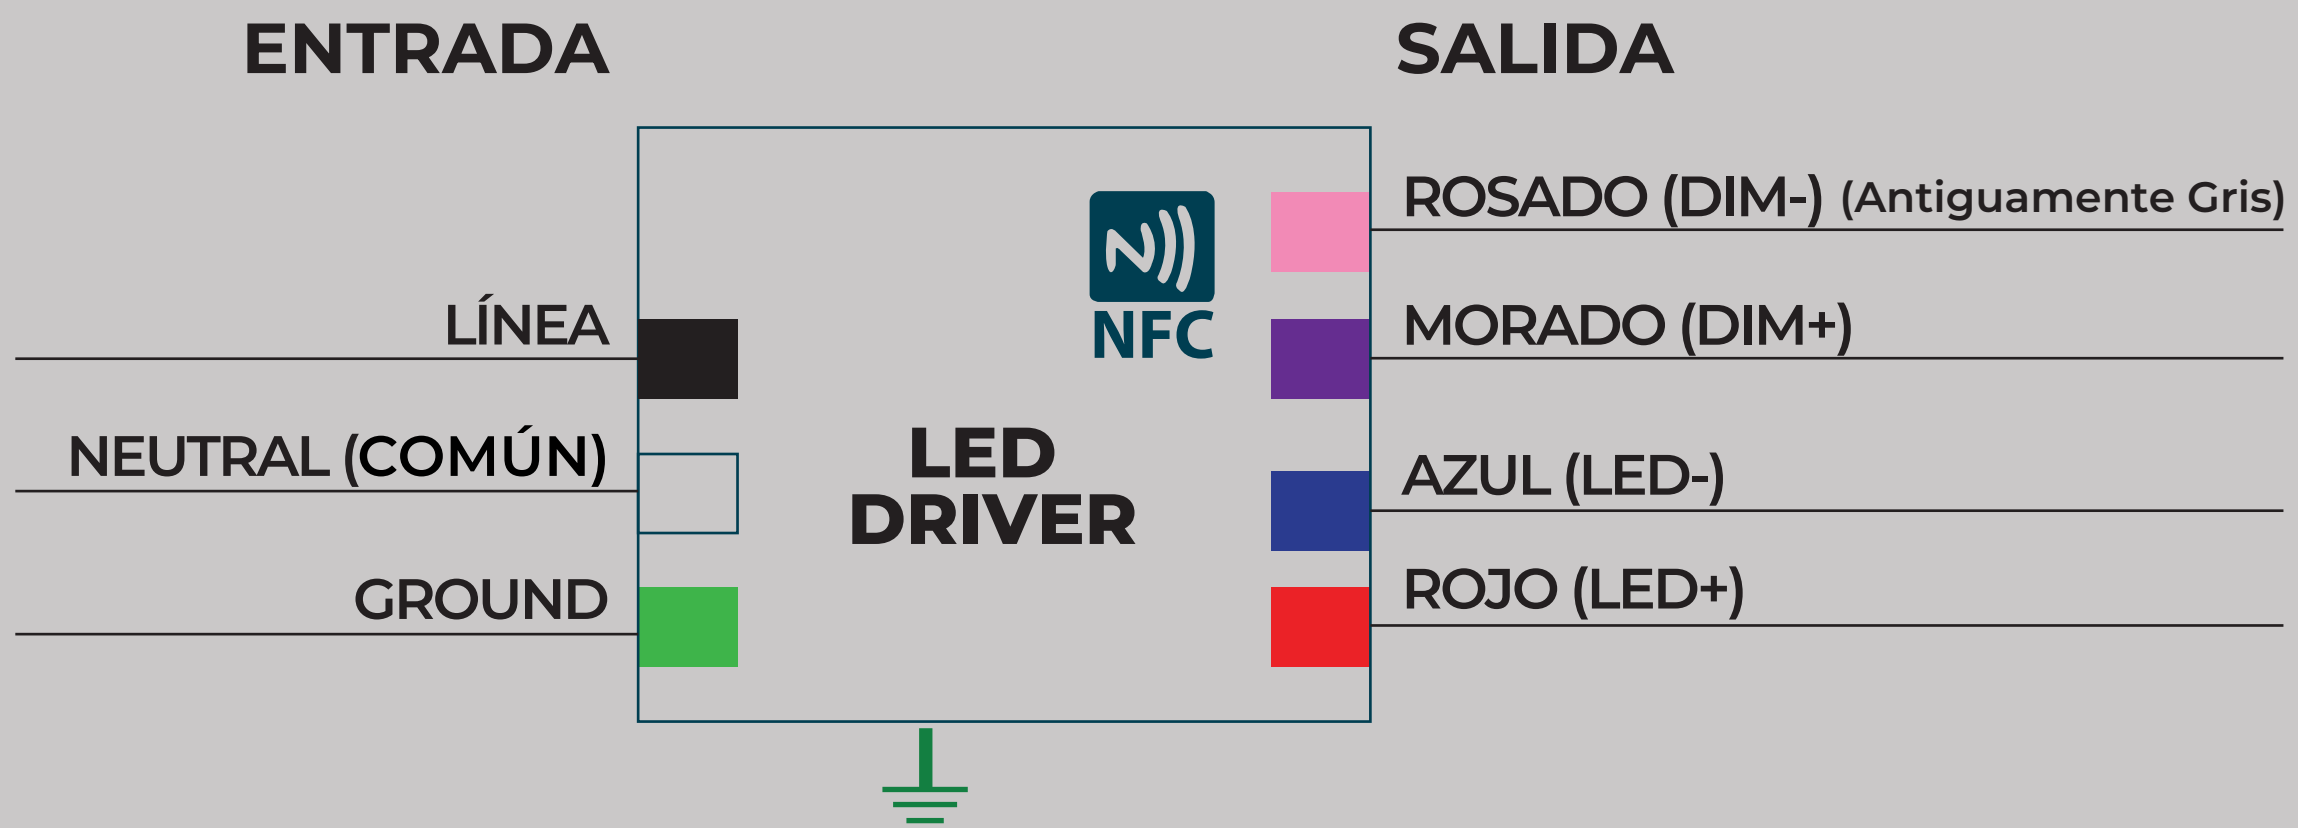

USAR CABLE DE COBRE