

ENGLISH WIRING DIAGRAM

ACEPH20M1555CPO EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 130 mA
- Input Power (max): 11 W
- Output Voltage: 15-55 Vdc
- Output Current: 360 mA - 1350 mA
- Output Power: 20 W
- Battery Voltage: 9.6 V
- Battery Charge Current: 450 mA

- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit. BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

CSA C22.2 No. 141, Emergency Lighting Equipment Appareil d'éclairage de secours



800-375-6355

USE COPPER WIRE


MiniTitan POWER



Made in Taiwan - AM209



A. TYPICAL WIRING DIAGRAM FOR SWITCHING THE SWITCHED HOT AC POWER FOR THE NORMAL AC LED DRIVER

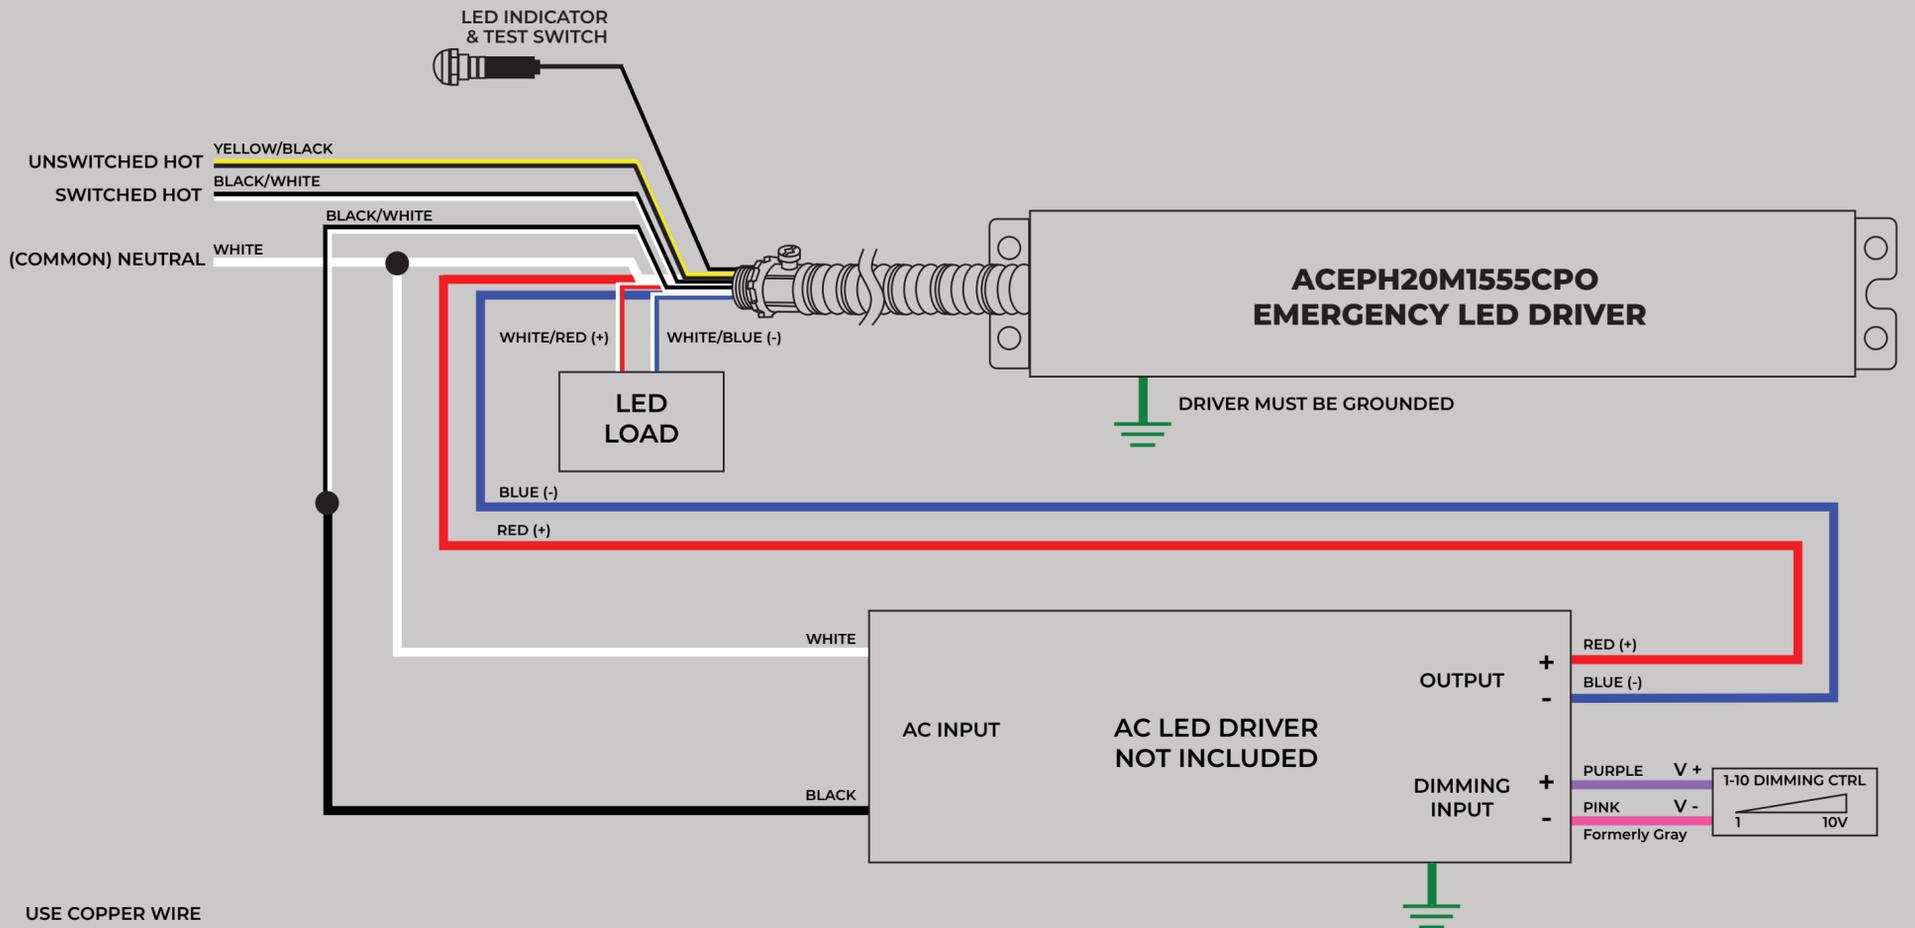

B. TYPICAL WIRING DIAGRAM FOR SWITCHING THE NEUTRAL WIRE OF THE NORMAL AC LED DRIVER

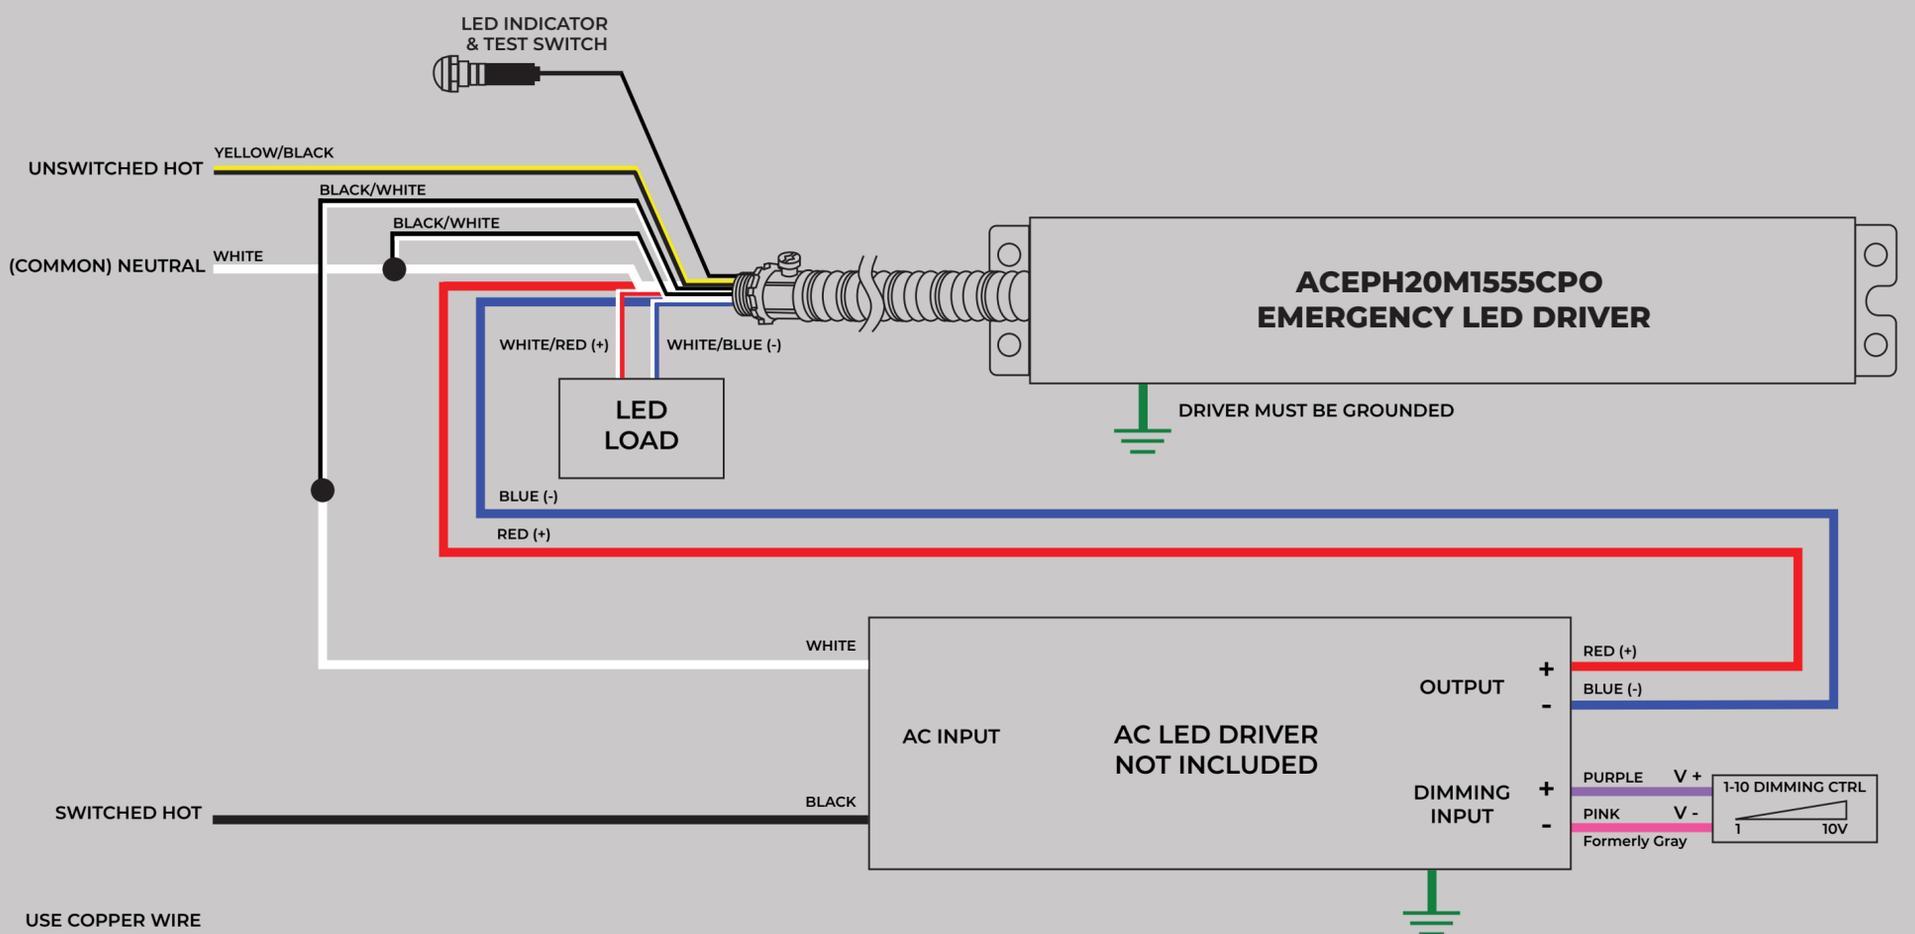


DIAGRAMA DE CABLEADO EN ESPAÑOL

ACEPH20M1555CPO EMERGENCY LED DRIVER

- Input Voltage: 120-277 V, 50/60 Hz
- Input Current (max): 130 mA
- Input Power (max): 11 W
- Output Voltage: 15-55 Vdc
- Output Current: 360 mA - 1350 mA
- Output Power: 20 W
- Battery Voltage: 9.6 V
- Battery Charge Current: 450 mA

- Battery Charge Time (max): 24 Hours
- Operating Duration (min): 90 Minutes
- Ambient Temperature: 0-55 °C
- Output Class 2 Compliant
- Suitable for damp locations
- For factory or field installation
- For metal enclosed wiring system

CAUTION: See instruction manual for installation, operating, and maintenance instructions. Service by Qualified Personnel Only. De-energize before opening. Sealed unit BATTERY not replaceable. Replace entire unit when necessary.

ATTENTION: Not suitable for air-handling or heated air outlets.

CSA C22.2 No. 141, Emergency Lighting Equipment Appareil d'éclairage de secours


ACE LEDS
800-375-6355

USE COPPER WIRE

Mini Titan POWER BC COMPLIANT TAA COMPLIANT Made in Taiwan · AM209



A. DIAGRAMA DE CABLEADO TÍPICO PARA CONMUTAR LA ENERGÍA AC CALIENTE CONMUTADA PARA EL CONTROLADOR LED AC NORMAL

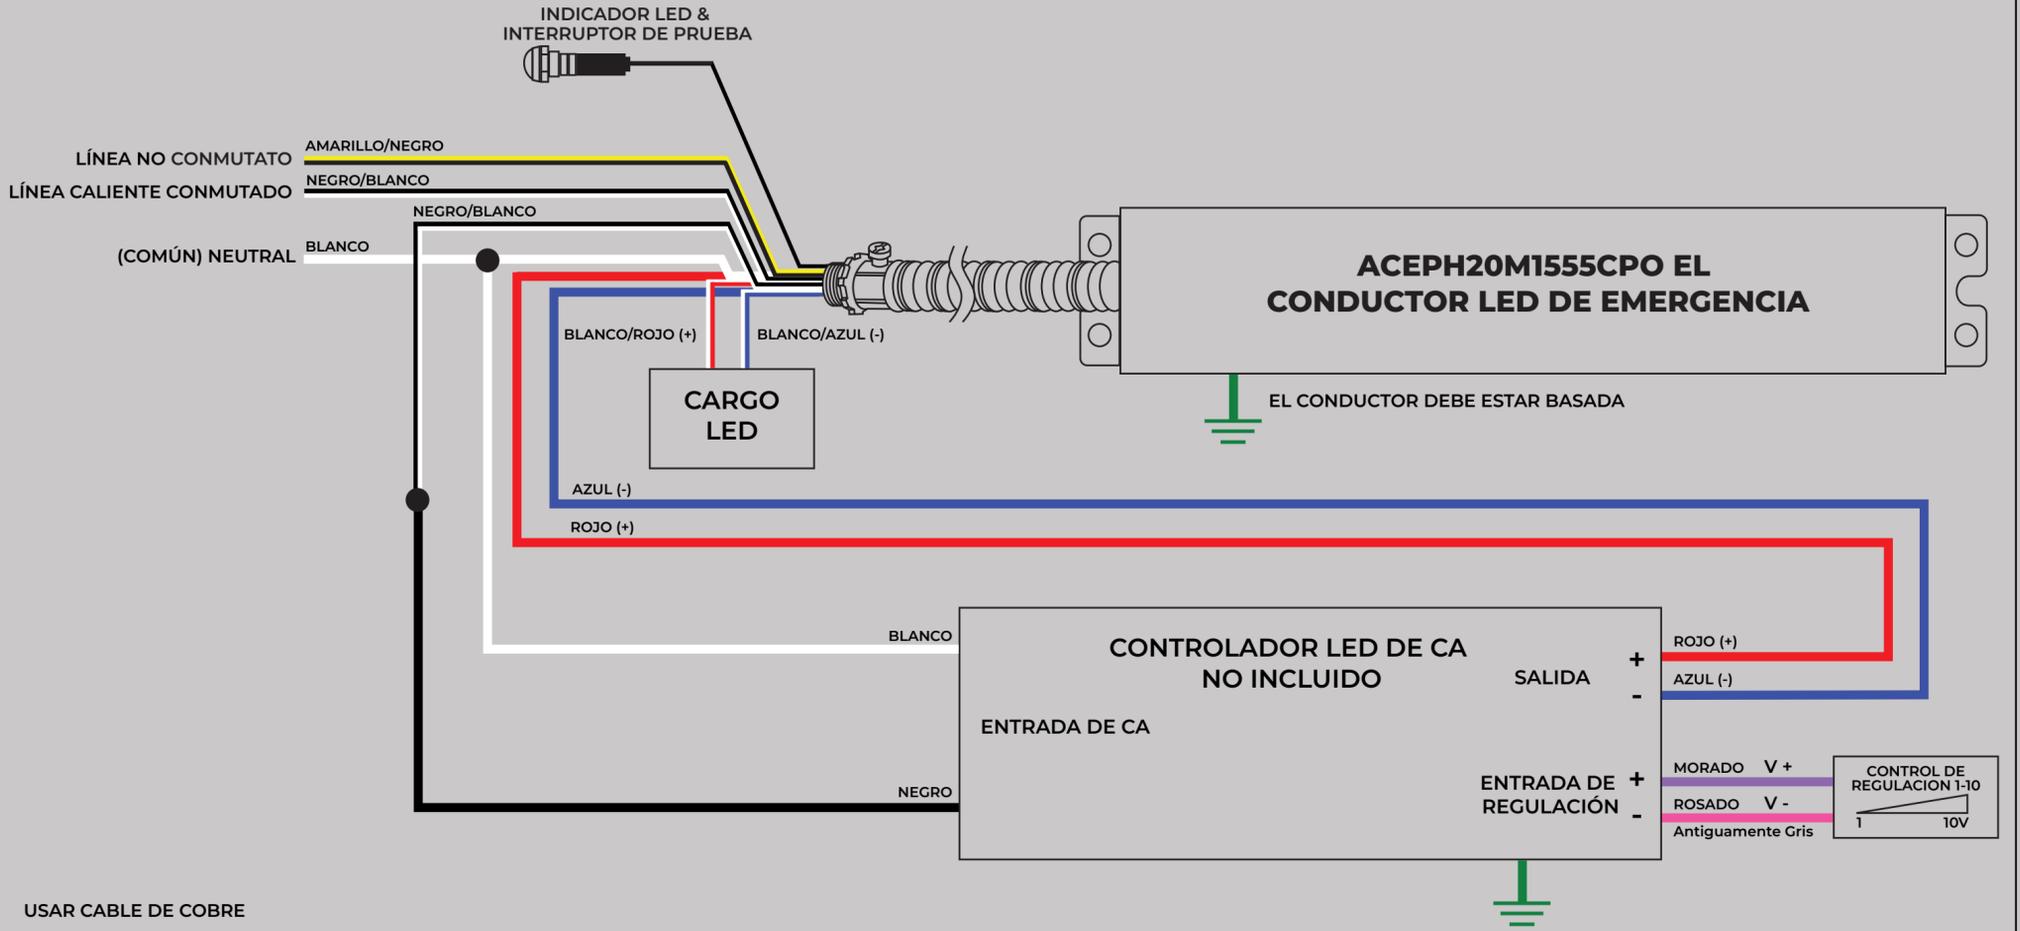

B. DIAGRAMA DE CABLEADO TÍPICO PARA CONMUTAR EL CABLE NEUTRO DEL CONDUCTOR LED CA NORMAL

