



**PROGRAMMABLE,
 DIGITAL, WIDE-RANGE
 ADJUSTABLE CURRENT & DIMMING
 TYPE TL RATED**

Constant Current LED Driver

**Model Number
 AC-25CDI.25BPME**

*** AC-25CDI.25BPMV
 AC25CDI.25BPBME**


Input Voltage: 347V
 Input Frequency: 50/60Hz
 Side Mount/Leads Options
 < 1 Sec. Start time/(Starting with batch code AKT.48)

ELECTRICAL SPECIFICATIONS:

Dim-to-1% (Default)

| Output Power Max | Input Power | Input Current | Min PF (full load) | Max THD (full load) | Output Voltage | Output Current | T case Max | Min Starting Temp** | IP Rating | Efficiency Up To | Dimming Protocol | Dimming Range |
|------------------|-------------|---------------|--------------------|---------------------|----------------|----------------|------------|---------------------|-----------|------------------|------------------|---------------|
| 8-25W | 31W | 0.1@347V | >95 | <20 | 15-55V | 350mA - 1250mA | 194/90° | -40°C | 64 | 82% | 0 to 10V | 1 to 100% |


** This driver can operate down to -40°C in a non-dimming condition. Below 0°C some flicker may be observed.

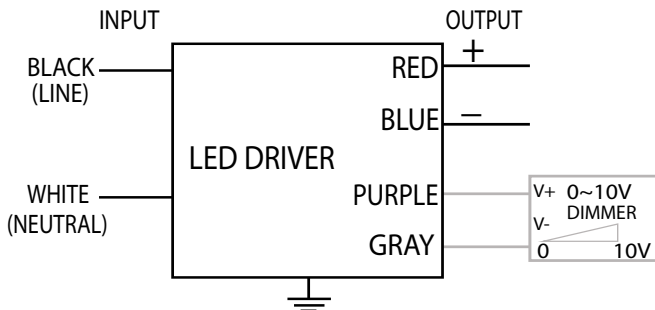

| Lead Lengths | | | | | |
|--------------|------|------|------|--------|------|
| Black | 5.9" | Blue | 5.9" | Purple | 5.9" |
| White | 5.9" | Red | 5.9" | Gray | 5.9" |

The LED Driver Type TL Program is intended to assist you in gaining greater market access for your LED drivers. This service is also intended to assist end-product LED Luminaire manufacturers improve their speed-to-market by making it easy to source a compliant LED Driver.

PHYSICAL:

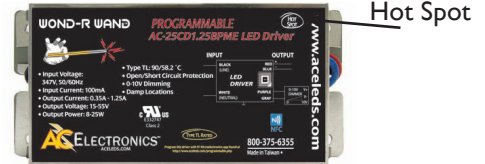

AC-25CDI.25BPME



AC-25CDI.25BPMV (1Kv ONLY)



AC25CDI.25BPBME
 Bottom Mount
 Start time <1 second

| Model | Length | Width | Height | Mounting |
|-----------------|--------|-------|--------|----------|
| AC-25CDI.25BPME | 5.23" | 2.48" | 1.18" | 4.84" |
| AC-25CDI.25BPMV | 6.22" | 1.73" | 1.22" | 5.86" |
| AC25CDI.25BPBME | 4.56" | 2.48" | 1.18" | |

SAFETY:

- UL and cUL Recognized
- UL Outdoor Type I
- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (3 KV)
- Surge Protection (1Kv) *
- Dim-To-Off Programming Option
 - o Active: Code = 4C 04 01 02
 - o Inactive: Code = 4C 04 00 02

INSTALLATION:

- Max Remote installation distance is 18 ft
- LED driver cases should be grounded
- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned stranded copper lead-wires are required for installation



*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.



Performance Characteristics

Phone Instructions

First you must have a Android device (phone/tablet) with NFC-V app downloaded.
 Open App; then place the device on top of the driver matching up sensors until it syncs up

Basic format

Write

Insert the appropriate code from chart above

Write

Successfully written will appear

To Check: Read


Read

Shows you the Block - 00 00 00 00

This is where the code you input appears

IOUT/VOUT CURVE

Use with NFC-V Reader App Available Free at Google App Store

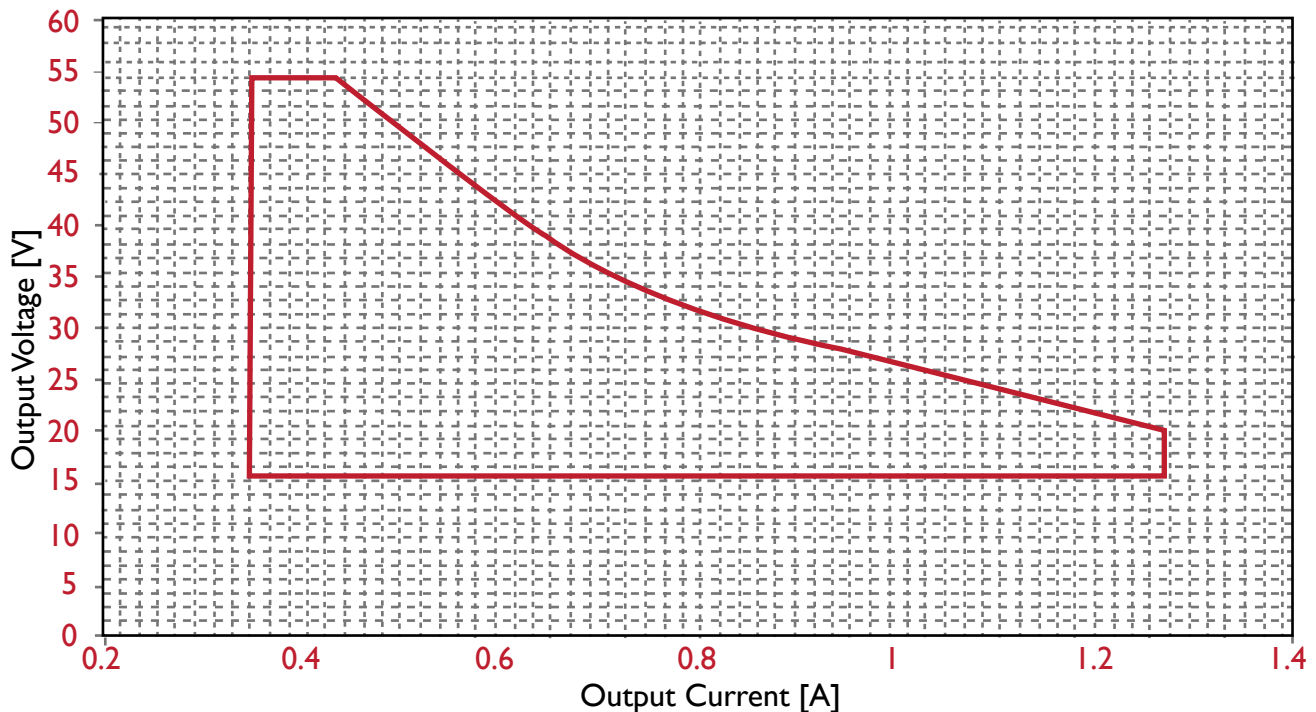

CONTROL THE IOUT WITH THE PROGRAMMING WAND. DOWNLOAD SOFTWARE FROM <http://www.aceleds.com/programmable.php>




3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.


Performance Characteristics

Life Time v.s. Case Temperature Curve

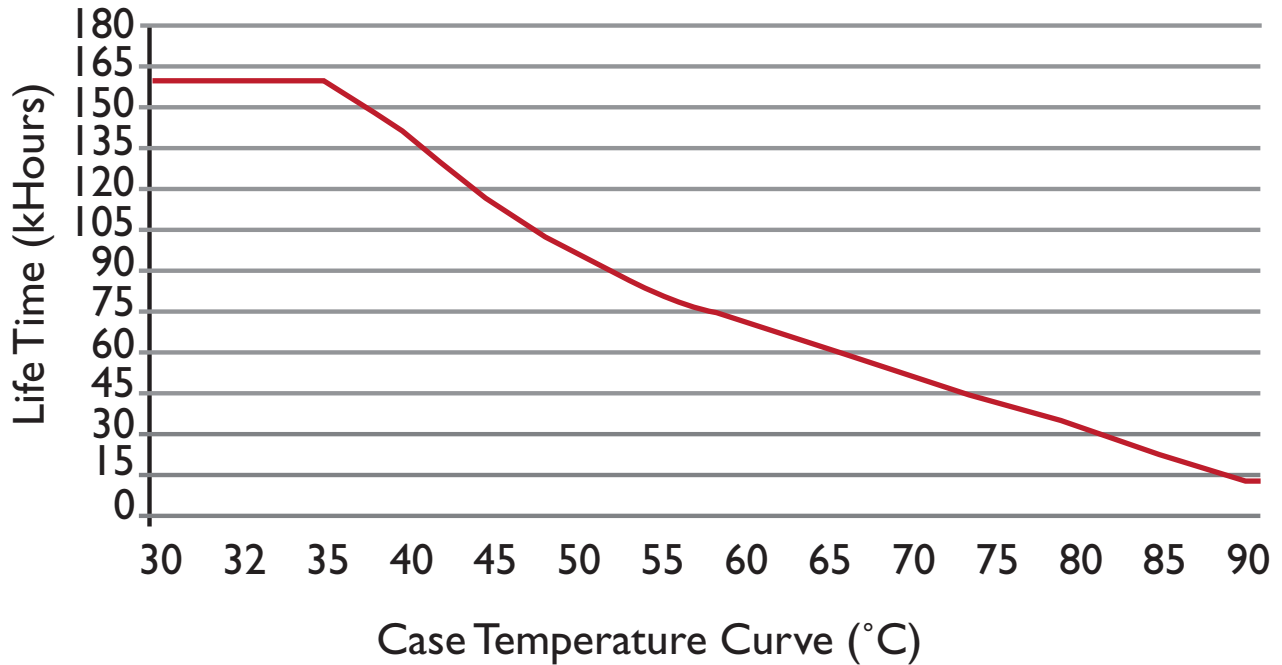

Derating Curve

120Vac & 277Vac

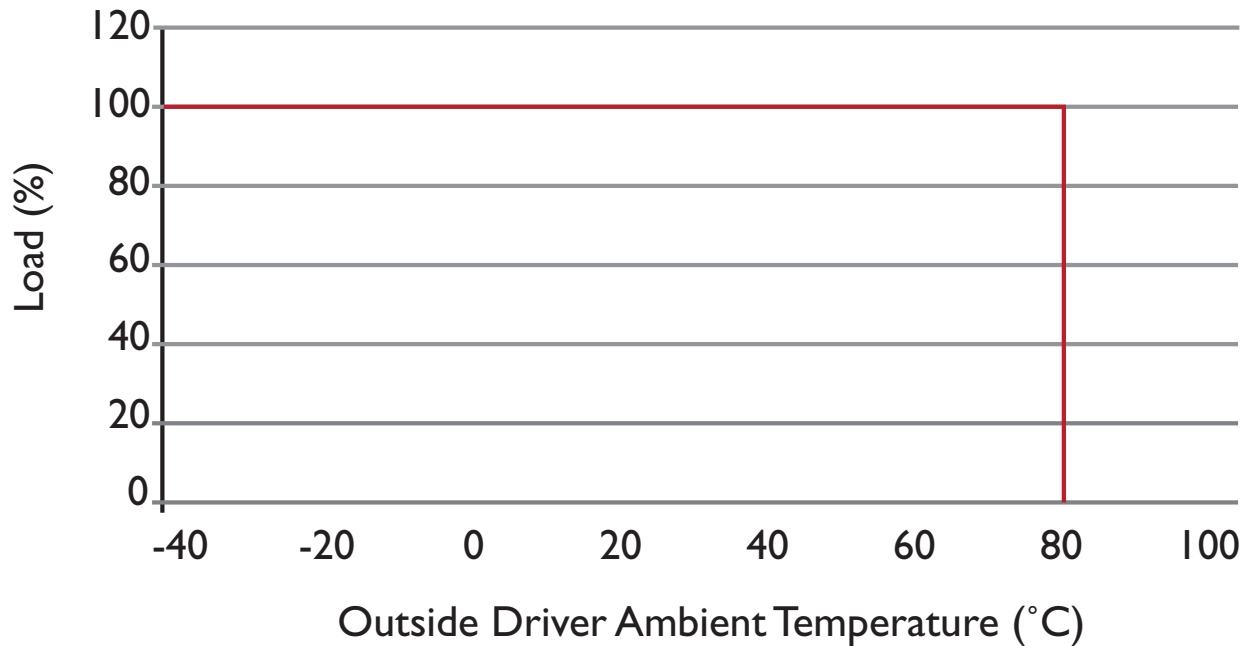


3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com


Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Performance Characteristics

Efficiency v.s. Load

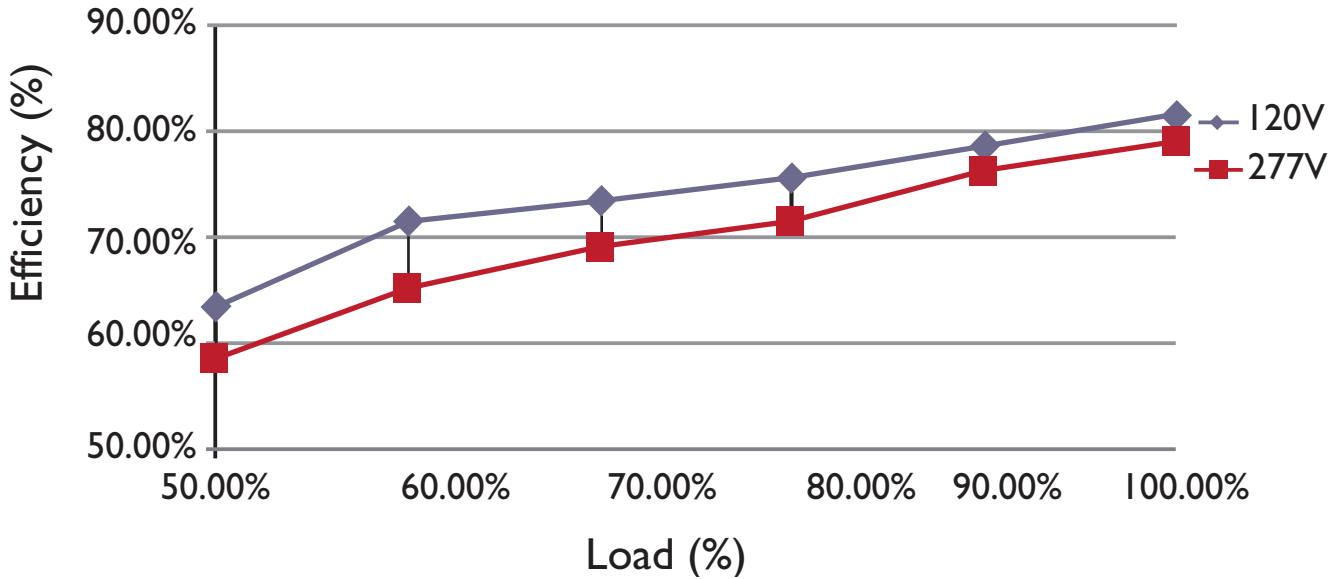

Power Factor v.s. Load

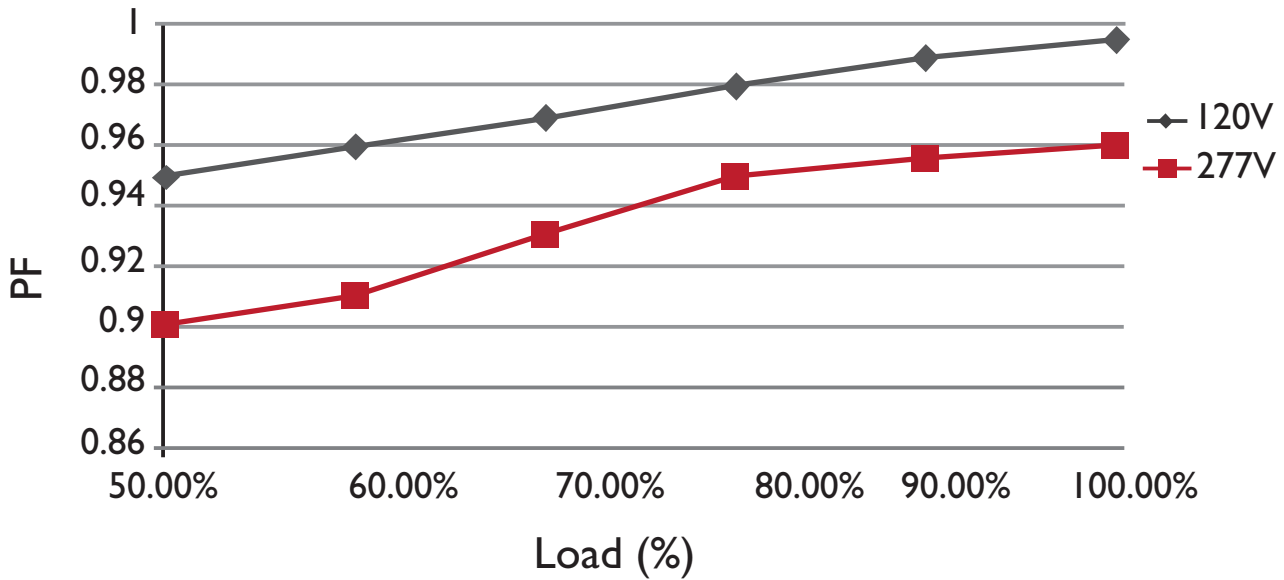


3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com


Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Performance Characteristics

Output Current v.s. Dimming

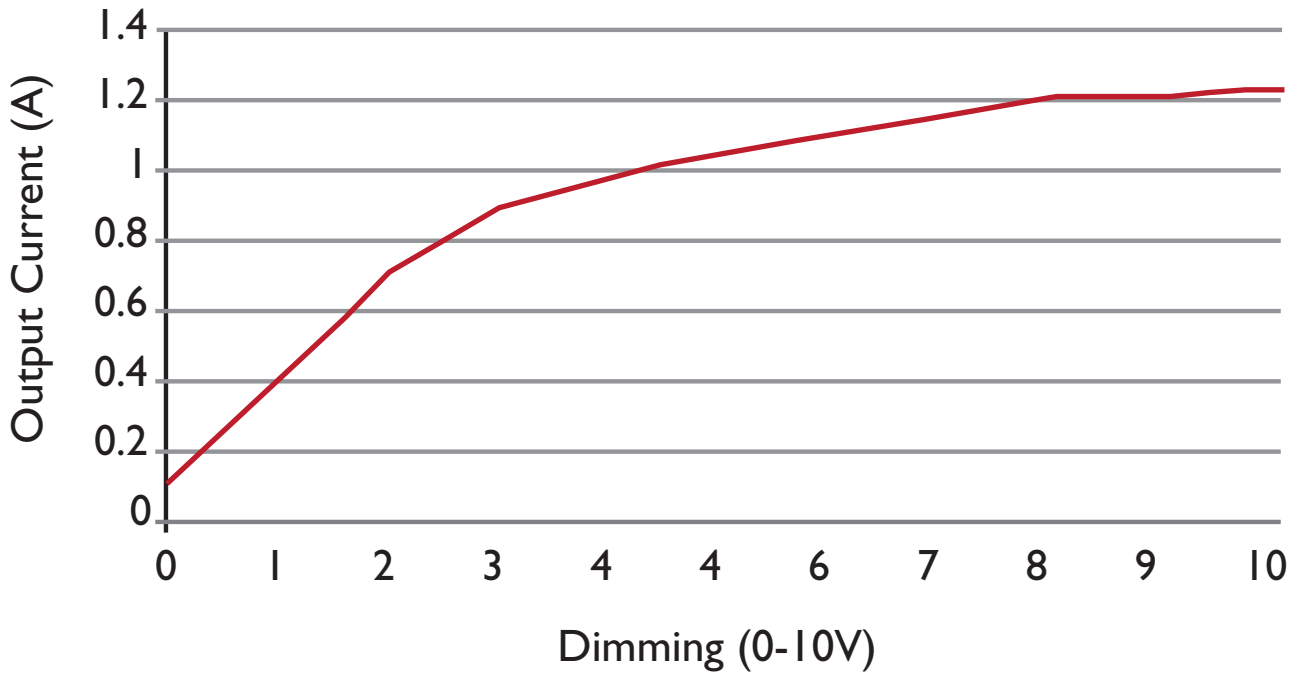

Output Current v.s. Resistance

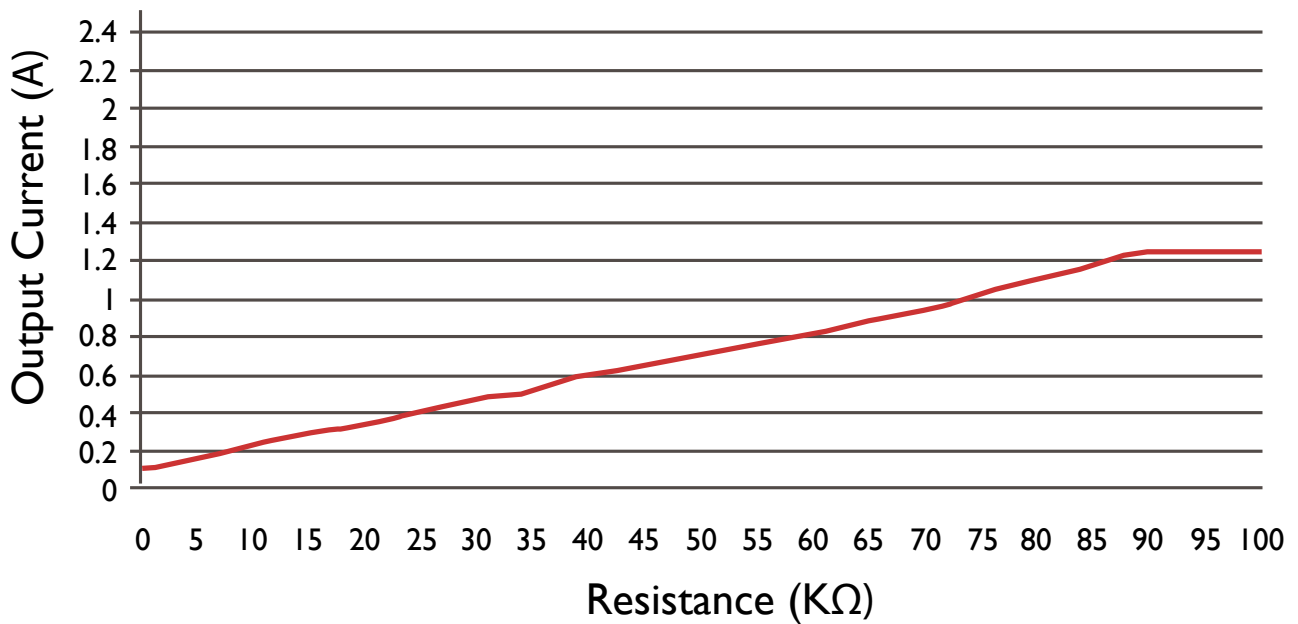

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.