



The Smallest Possible Factors™



Constant Current LED Driver Model Number AC25CD700AT2Q

Input Voltage: 120-277 VAC ($\pm 10\%$)

Input Frequency: 50/60 Hz

Dimming: 0 to 100%

Surge Protection: 2 Kv

Side Mount/Leads

Multi-Switching Current

Dimm-to-Off

PHYSICAL DIMENSIONS:

Length: 2.88"
Width: 1.43"
Height: 1.07"
Mounting: 2.68"
Weight: 0.15 lbs.


ACTUAL SIZE



ELECTRICAL SPECIFICATIONS:

Output Power Max	Input Power	Input Current	Min. PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Min. Starting Temps.	IP Rating	Dimming Protocol	Dimming Range	Efficiency Up To
25.2 W	28.6 W	0.27 A @ 120 V 0.11 A @ 277 V	>0.9	<20	24-36 V	700 mA $\pm 5\%$	75° C	0° C	20	0 to 10 V	0 to 100%	88%
18 W	20.5 W	0.19 A @ 120 V 0.08 A @ 277 V	>0.9	<20	24-36 V	500 mA $\pm 5\%$	75° C	0° C	20	0 to 10 V	0 to 100%	88%
12.6 W	14.7 W	0.14 A @ 120 V 0.06 A @ 277 V	>0.9	<20	24-36 V	350 mA $\pm 5\%$	75° C	0° C	20	0 to 10 V	0 to 100%	86%

WIRING:

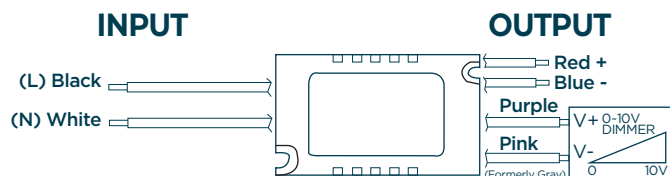

Note: Gray (-) dimming wire has been changed to pink per the 2020 NEC section 410.69 and NEMA.

LEAD LENGTH:

Black 12" | Blue 6" | Purple 6"
White 12" | Red 6" | Pink 6"

APPROVED DIMMERS:

Lutron NTSTV-DV | Leviton IP710 DL
Lutron NFTV | Watt Stopper ADF 120277

To order or consult with one of our engineers, contact us at:
800-375-6355 / aceleds.com



SAFETY & PERFORMANCE:




- Class P Listed
- Class A sound rating
- No PCBs
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of $\leq 75^{\circ}\text{C}$
- Warranty: 5 yrs based on max case temp of 75°C^*
- Input/Output Isolation
- Surge Protection (2 KV)
- Suitable for Dry Location
- Dimming Curve on the next page
- Gray (-) dimming wire has been changed to pink per the 2020 NEC section 410.69 and NEMA.

INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- Max Remote installation distance is 33 ft
- 22 AWG 600V/105C tinned stranded copper lead-wires are required to use in installation

*ACE LEDS warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years from date of manufacture when operated at max case temp of up to $\leq 75^{\circ}\text{C}$ when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

PERFORMANCE METRICS: AC25CD700AT2Q

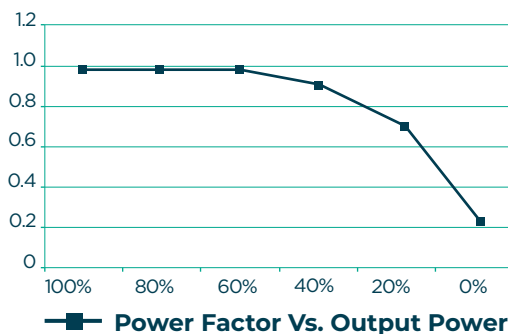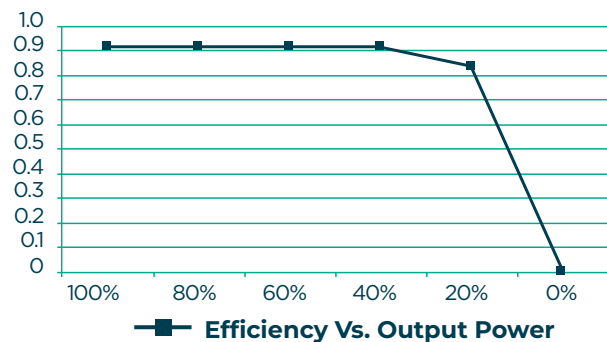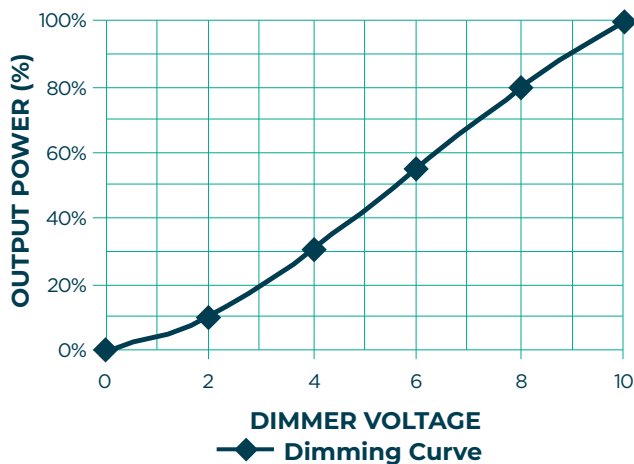

3401 Avenue D, Arlington, TX 76011
800-375-6355 • aceleds.com

Data is based upon tests performed by ACE LEDS in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
All specifications are nominal unless otherwise noted.

